


Light Cure Adhesives

For Fast Processing

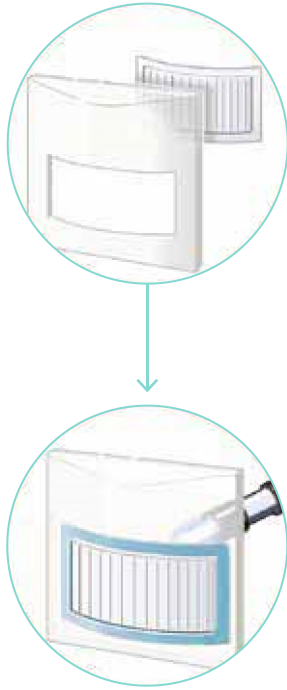

Why use a LOCTITE Light Cure Adhesive?

In addition to their excellent bonding characteristics and transparency, light cure adhesives also provide unique processing advantages and process cost reduction benefits. When exposed to sufficient light of the appropriate wavelength, they cure very rapidly and allow fast production cycles, in-line quality control and fast cycling to subsequent process steps.

LOCTITE light cure equipment is engineered to match the adhesives with respect to intensity and radiation spectrum, and suits specific part size and manufacturing process requirements.

Advantages of LOCTITE Light Cure Adhesives

Cure on demand

- Material remains liquid until exposed to light systems, then cures in seconds
- Allows time to align parts precisely prior to cure
- Choice of cure system determines cure time

High speed of cure

- Achieves high process speeds for maximum throughput
- Fast cycling to subsequent process steps

Optical clarity

- Ideal for bonding clear and transparent substrates with perfect aesthetic finish
- Greatly expands the design options

Quality assurance

- Product presence monitoring by fluorescence
- Fast-snap cure allows 100% in-line inspection
- Monitoring functions for cure parameters

One part systems

- Automated accurate dispensing
- No need to measure or mix, no working life concerns
- Solvent-free

Choosing the Right LOCTITE Light Cure Adhesive

To ensure reliable curing, it is essential that the light reaches the adhesive. At least one of the bonded parts must be transparent to the curing wavelength of the adhesive selected. For UV-stabilised plastics, for example, visible light cure adhesives should be selected.

Dual cure capability, triggered by heat or activator, or as moisture or anaerobic cure, can also be provided to cure adhesives in shaded areas. Dual cure expands the benefits of light cure technology to non-transparent substrates and other application areas.

The targeted radiation wavelength is another key factor. Visible light offers a safer working environment. Light cure adhesives are designed to cure solely with low-energy light in the visible spectrum. This eliminates the need for ventilation, reduces energy usage, and saves money due to fewer replacement parts, as well as reduced maintenance and repair.

Last but not least, adhesive performance is an important factor to consider. LOCTITE light cure adhesives cover the broadest range of adhesive technologies:

LOCTITE Light Cure Adhesive Technologies

- Light cure acrylics offer the most extensive variety of properties of all light cure chemistries. A transparency equal to glass and clear plastics, as well as versatile adhesion characteristics are among their most notable properties
- Light cure silicones, which cure into soft, flexible thermoset elastomers, are excellent for elastic bonding, sealing and leak-proofing
- Light cure cyanoacrylates offer outstanding plastic bonding capabilities combined with rapid cure at low-intensity light irradiation
- Light cure anaerobics show excellent metal-bonding capabilities and offer outstanding chemical resistance combined with shadow cure



Surface Preparation

Correct surface preparation is a key factor in ensuring the total success of any adhesive performance.

- The surfaces to be bonded should be clean, dry and free of grease. If necessary, clean the parts with LOCTITE SF 7063 or LOCTITE SF 7070 and allow to dry (see Cleaning on page 110)

Dispensing Equipment and Light Cure Systems

For some jobs it is sufficient to dispense the product manually from the bottle onto the parts to be bonded. In other cases, however, more precise hand-held or stationary automated dispensing equipment is required. LOCTITE dispensing equipment is specially designed to make application and use of our products fast, precise, clean and economical:

Semi-Automatic Dispensing System LOCTITE 97152 / 97108 / 98009

The system is suitable for dispensing dots or beads of low to medium-viscosity LOCTITE light cure adhesives, and is designed for integration into automated assembly lines. The valve is of modular design to facilitate field repairs. The reservoir holds up to 1 litre LOCTITE bottles. The controller interfaces with a reservoir and dispense valve to provide all the controls required for accurate and repeatable dispensing.



97152 / 97108 / 98009

Light Cure Systems

LOCTITE light cure systems are available for manual workstations as well as for production line integration. Various bulb and LED technologies ensure the proper wavelength adapted to the adhesive selected and the transparency of the parts to be bonded (for more details, see Light Cure Equipment on page 160).



97055

For information on semi- or fully automatic dispensing equipment, available valves, spare parts, accessories and dispensing tips, please refer to pages 152 – 163 or the LOCTITE Equipment Sourcebook.

Light Cure Adhesives

Product Table

Is a shaded area created by a non-transparent substrate? Is a secondary cure needed for shaded areas?

No

Are you bonding glass?

Glass and other substrates

High strength &

Capillary

Ultra clear

Fast cure

Low viscosity

Solution

**LOCTITE
AA 3081**



**LOCTITE
AA 3491**



**LOCTITE
AA 3494**



**LOCTITE
AA 3922**



Chemistry

Acrylic

Acrylic

Acrylic

Acrylic

Viscosity

100 mPa·s

1,100 mPa·s

6,000 mPa·s

300 mPa·s

Colour

Clear

Clear

Clear

Transparent, colourless

Fluorescence

Yes

No

No

Yes

Service temperature range

-40°C to +120°C

-40°C to +130°C

-40°C to +120°C

-40°C to +130°C

Pack sizes

1 ltr

25ml, 1 ltr

25ml, 1 ltr

25ml, 1 ltr

LOCTITE AA 3081

- UV-light curing acrylic
- Low viscosity, wicking grade for post-assembly applications
- For bonding glass, plastics, metals, etc.

LOCTITE AA 3491

- UV-light curing acrylic
- Low yellowing in sunlight environment
- For bonding glass, plastics, metals etc.

LOCTITE AA 3494

- UV-light and/or visible light curing acrylic
- Low yellowing in sunlight environment
- For bonding glass, plastics, metals etc.

LOCTITE AA 3922

- UV-light and/or visible light curing acrylic
- Low yellowing in sunlight environment
- For bonding plastics, metals etc.

* For more products with a secondary cure mechanism, please see table on page 42

Yes*

No glass

bendable / deformable

High strength

High strength

Highly elastic

High viscosity

Toughened

Very fast

Instant adhesive

Silicone

**LOCTITE
AA 3926**

Acrylic

5,500 mPa·s

Transparent, colourless

Yes

-40°C to +150°C

25ml, 1 ltr

LOCTITE AA 3926

- UV-light and/or visible light curing acrylic
- Low yellowing in sunlight environment
- For bonding plastics, metals etc.

**LOCTITE
AA 3525**

Acrylic

15,000 mPa·s

Clear

No

-40°C to +140°C

25ml, 1 ltr

LOCTITE AA 3525

- UV-light and/or visible light curing acrylic
- Low yellowing in sunlight environment
- For bonding plastics, metals etc.

**LOCTITE
AA 3556**

Acrylic

5,000 mPa·s

Transparent, yellow

Yes

-40°C to +100°C

1 ltr

LOCTITE AA 3556

- Very fast light cure acrylic
- Cures with UV-light and visible light
- For bonding plastics, metals etc.

**LOCTITE
4304**

Cyanoacrylate

20 mPa·s

Transparent, pale green

No

-40°C to +100°C

28g

LOCTITE 4304

- UV-light and/or visible light curing cyanoacrylate
- Cures in bond gaps by surface humidity
- For bonding plastics, metals, paper etc.

**LOCTITE
SI 5091**

Silicone

5,000 mPa·s

Translucent, slightly milky

No

-60°C to +180°C

300ml

LOCTITE SI 5091

- UV-light curing silicone with secondary RTV cure
- For elastic sealing and bonding applications
- Good adhesion on metals, glass and most plastics

Light Cure Adhesives

Product List

| Product / grade | Chemical basis | Suitable wavelengths for cure | Secondary cure system | Viscosity | Service temperature range | Depth of cure | Colour | Fluorescence | |
|--|----------------|-------------------------------|-----------------------|--------------------------|---------------------------|---------------|---------------------------|--------------|--|
| LOCTITE AA 322 | Acrylic | UV | No | 5,500 mPa·s | -40°C to +100°C | 4 mm | Transparent, light amber | No | |
| LOCTITE AA 350 | Acrylic | UV | No | 4,500 mPa·s | -40°C to +120°C | 4 mm | Transparent, light amber | No | |
| LOCTITE AA 352 | Acrylic | UV | Activator 7075 | 15,000 mPa·s | -40°C to +150°C | 4 mm | Transparent, amber | No | |
| LOCTITE AA 3011^{Med} | Acrylic | UV | No | 110 mPa·s | -40°C to +100°C | 4 mm | Transparent, light amber | No | |
| LOCTITE AA 3081^{Med} | Acrylic | UV | No | 100 mPa·s | -40°C to +120°C | 4 mm | Clear | Yes | |
| LOCTITE AA 3211^{Med} | Acrylic | UV/VIS | No | 10,000 mPa·s thixotropic | -40°C to +140°C | > 13 mm | Transparent, amber | No | |
| LOCTITE AA 3301^{Med} | Acrylic | UV/VIS | No | 160 mPa·s | -40°C to +130°C | > 13 mm | Transparent, colourless | No | |
| LOCTITE AA 3311^{Med} | Acrylic | UV/VIS | No | 300 mPa·s | -40°C to +130°C | > 13 mm | Transparent, colourless | No | |
| LOCTITE AA 3321^{Med} LOCTITE AA 3106 | Acrylic | UV/VIS | No | 5,500 mPa·s | -40°C to +150°C | > 13 mm | Transparent, light yellow | No | |
| LOCTITE AA 3341^{Med} | Acrylic | UV/VIS | No | 500 mPa·s | -40°C to +100°C | > 13 mm | Transparent, light yellow | Yes | |
| LOCTITE AA 3345^{Med} | Acrylic | UV | No | 1,500 mPa·s | -40°C to +120°C | 4 mm | Transparent, light amber | No | |
| LOCTITE AA 3381^{Med} | Acrylic | UV | No | 5,100 mPa·s | -40°C to +130°C | 4 mm | Translucent, colourless | No | |
| LOCTITE AA 3491 | Acrylic | UV | No | 1,100 mPa·s | -40°C to +130°C | 4 mm | Clear | No | |
| LOCTITE AA 3494 | Acrylic | UV/VIS | No | 6,000 mPa·s | -40°C to +120°C | > 13 mm | Clear | No | |
| LOCTITE AA 3525 | Acrylic | UV/VIS | No | 15,000 mPa·s | -40°C to +140°C | > 13 mm | Clear | Yes | |

Med = Certified according to ISO 10993 for medical device manufacturing

* Cured with LOCTITE 97055, 100 mW/cm² at 365 nm

** Irradiated with 6 mW/cm² at 365 nm

| | Tack-free time* | Fixturing time** | Shore hardness | Substrates | | | | Pack sizes | Comments |
|--|-----------------|------------------|----------------|------------|----------|--------|----------|---------------------------|--|
| | | | | Glass | Plastics | Metals | Ceramics | | |
| | 4 sec. | 10 sec. | D 68 | ● | ● ● | ● | ● | 250ml, 1 ltr | Fast surface cure |
| | 20 sec. | 15 sec. | D 70 | ● ● | ● | ● ● | ● | 50ml, 250ml, 1 ltr | High humidity and chemical resistance |
| | 17 sec. | 10 sec. | D 60 | ● ● | | ● ● | ● ● | 50ml, 250ml, 1 ltr | High humidity and chemical resistance, toughened |
| | 8 sec. | 10 sec. | D 68 | | ● ● | ● | ● | Not available in the U.K. | Fast surface cure |
| | 8 sec. | 10 sec. | D 74 | ● ● | ● ● | ● | ● | 1 ltr | Fast surface cure |
| | > 30 sec. | 12 sec. | D 51 | ● | ● ● | ● ● | ● | 25ml, 1 ltr | For stress-sensitive plastics |
| | > 30 sec. | 12 sec. | D 69 | ● | ● ● | ● ● | ● | 25ml | For stress-sensitive plastics |
| | > 30 sec. | 12 sec. | D 64 | ● | ● ● | ● ● | ● | 25ml, 1 ltr | For stress-sensitive plastics |
| | > 30 sec. | 12 sec. | D 53 | ● | ● ● | ● ● | ● | 25ml, 1 ltr | For stress-sensitive plastics |
| | 15 sec. | 8 sec. | D 27 | | ● ● | ● | ● | 25ml, 1 ltr | Highly flexible, for soft PVC |
| | 30 sec. | 15 sec. | D 70 | ● ● | ● | ● ● | ● | Not available in the U.K. | High humidity and chemical resistance |
| | > 30 sec. | 30 sec. | A 72 | ● | ● ● | ● | ● | 25ml, 1 ltr | Highly flexible, high thermal cycle resistance |
| | 15 sec. | 12 sec. | D 75 | ● ● | ● ● | ● ● | ● | 25ml, 1 ltr | High transparency, low yellowing |
| | > 30 sec. | 8 sec. | D 65 | ● ● | ● ● | ● ● | ● | 25ml, 1 ltr | High transparency, low yellowing |
| | 10 sec. | 5 sec. | D 60 | ● | ● ● | ● ● | ● | 25ml, 1 ltr | High strength, toughened |

●● Well suited for
● Suited for

Light Cure Adhesives

Product List

| Product / grade | Chemical basis | Suitable wavelengths for cure | Secondary cure system | Viscosity | Service temperature range | Depth of cure | Colour | Fluorescence | |
|--|----------------|-------------------------------|-----------------------|-------------------|---------------------------|---------------|-----------------------------|--------------|--|
| LOCTITE 4304^{Med} | Cyano-acrylate | UV/VIS | Surface moisture | 20 mPa·s | -40°C to +100°C | > 13 mm | Transparent, pale green | No | |
| LOCTITE 4305^{Med} | Cyano-acrylate | UV/VIS | Surface moisture | 900 mPa·s | -40°C to +100°C | > 13 mm | Transparent, pale green | No | |
| LOCTITE AA 3556^{Med} | Acrylic | UV/VIS | No | 5,000 mPa·s | -40°C to +100°C | > 13 mm | Transparent, yellow | Yes | |
| LOCTITE AA 3921^{Med} | Acrylic | UV/VIS | No | 150 mPa·s | -40°C to +130°C | > 13 mm | Transparent, colourless | Yes | |
| LOCTITE AA 3922^{Med} | Acrylic | UV/VIS | No | 300 mPa·s | -40°C to +130°C | > 13 mm | Transparent, colourless | Yes | |
| LOCTITE AA 3926^{Med} | Acrylic | UV/VIS | No | 5,500 mPa·s | -40°C to +150°C | > 13 mm | Transparent, colourless | Yes | |
| LOCTITE AA 3936^{Med} | Acrylic | UV/VIS | No | 11,000 mPa·s | -40°C to +140°C | > 13 mm | Transparent, colourless | Yes | |
| LOCTITE AA 3972 | Acrylic | UV/VIS | No | 4,600 mPa·s | -40°C to +100°C | > 13 mm | Transparent, light amber | Yes | |
| LOCTITE SI 5083 | Silicone | UV | Atmospheric moisture | Thixotropic paste | -60°C to +200°C | 5 mm | Translucent, slightly milky | No | |
| LOCTITE SI 5088 / LOCTITE SI 5248^{Med} | Silicone | UV | Atmospheric moisture | 65,000 mPa·s | -60°C to +200°C | 1.5 mm | Translucent, straw coloured | No | |
| LOCTITE SI 5091 | Silicone | UV | Atmospheric moisture | 5,000 mPa·s | -60°C to +180°C | 4 mm | Translucent, slightly milky | No | |

Med = Certified according to ISO 10993 for medical device manufacturing

* Cured with LOCTITE 97055, 100 mW/cm² at 365 nm

** Irradiated with 6 mW/cm² at 365 nm

| | Tack-free time* | Fixturing time** | Shore hardness | Substrates | | | | Pack sizes | Comments |
|--|-----------------|------------------|----------------|------------|----------|--------|----------|---------------------------|--|
| | | | | Glass | Plastics | Metals | Ceramics | | |
| | < 5 sec | 2 sec | D 72 | | • • | • | • | 28.3g | High plastic adhesion, low-intensity cure |
| | < 5 sec | 2 sec | D 77 | | • • | • | • | 28g, 454g | High plastic adhesion, low-intensity cure |
| | 10 sec | 5 sec | D 68 | | • • | • | • | 1 ltr | Fast cure, for coloured transparent substrates |
| | > 30 sec | 3 sec | D 67 | • | • • | • | • | 25ml, 1 ltr | For stress-sensitive plastics |
| | > 30 sec | 5 sec | D 66 | • | • • | • | • | 25ml, 1 ltr | For stress-sensitive plastics |
| | > 30 sec | 3 sec | D 57 | • | • • | • | • | 25ml, 1 ltr | For stress-sensitive plastics |
| | > 30 sec | 12 sec | D 55 | • | • • | • | • | 25ml, 1 ltr | For stress-sensitive plastics |
| | 5 sec | 5 sec | D 68 | | • • | • • | | 15 ltr | Fast cure, high adhesion to soft PVC |
| | 20 sec | > 30 sec | A 55 | • • | • | • • | • • | 300ml, 18kg | Highly flexible, acetoxysilicone |
| | > 30 sec | > 30 sec | A 30 | • • | • | • • | • • | Not available in the U.K. | Highly flexible, alkoxy silicone |
| | 30 sec | > 30 sec | A 34 | • • | • | • • | • • | 300ml | Highly flexible, acetoxysilicone |

•• Well suited for
• Suited for