

CORE PRODUCTS CATALOG

VALUE-DRIVEN SOLUTIONS TO MEET INDUSTRY NEEDS



Mechanical Seals



Packing and Gaskets



Polymer Seals



Industrial Lubricants
and MRO Products



ARC Industrial
Coatings



Equipment
Monitoring

TABLE OF CONTENTS

Chesterton® Solutions for Rotating Equipment4 – 5

MECHANICAL SEALS

Product Selection Guide 6

Cartridge Seals

| | |
|---------------|----|
| 1510..... | 7 |
| 150/150L..... | 8 |
| 250/250L..... | 9 |
| S10..... | 10 |
| S20..... | 11 |
| 1810..... | 12 |
| 2810..... | 13 |

Split Seals

| | |
|-----------|----|
| 442..... | 14 |
| 442C..... | 15 |

Gas Seals

| | |
|-----------|----|
| 4400..... | 16 |
|-----------|----|

Slurry Seals

| | |
|----------|----|
| 170..... | 16 |
|----------|----|

Seal Support Systems

| | |
|--|----|
| SpiralTrac®..... | 17 |
| Intelli-Flow™ HT..... | 17 |
| Buffer Support System Tank (BSS)..... | 18 |
| Pressurized Support System Tank (PSS)..... | 18 |
| Water Saving System Tank (WSS)..... | 18 |

EQUIPMENT MONITORING

| | |
|---------------------------------|----|
| Chesterton Connect™ System..... | 20 |
| Chesterton Connect™ Cloud..... | 21 |

PACKING AND GASKETS

Product Selection Guide 22

Pump, Mixer, and Agitator Packing

| | |
|-------------------------------------|----|
| DualPac® 2211 and DualPac 2212..... | 23 |
| 370..... | 24 |
| 377 CarbMax™..... | 24 |
| 477-1..... | 25 |
| 1725A..... | 25 |
| 1730/1730SC..... | 26 |
| GraphMax™..... | 26 |
| 1830-SSP..... | 27 |
| CMS 2000..... | 27 |
| SuperSet™..... | 28 |
| The AMPS™ System..... | 28 |

Valve Packing

| | |
|-----------|----|
| 1622..... | 29 |
|-----------|----|

Chesterton Solutions for Stationary Equipment..... 30 – 31

| | |
|----------------------------|----|
| 1724..... | 32 |
| 1600..... | 32 |
| 1601..... | 33 |
| 5800..... | 33 |
| 6800 LowE Packing Set..... | 34 |

Valve Live Loading

| | |
|-----------------------------------|----|
| Cartridge Live Loading (CLL)..... | 35 |
| 5150..... | 35 |
| 5300..... | 35 |
| 5100..... | 35 |

Gasket and Flange Sealing

Flange Live Loading

| | |
|------------|----|
| 5500..... | 35 |
| 5505H..... | 35 |

Sheet Gaskets

| | |
|------------|----|
| 457..... | 36 |
| 459..... | 36 |
| ECS-T..... | 36 |

Semi-Metallic Gaskets

| | |
|-------------------|----|
| Camprofile..... | 37 |
| Spiral Wound..... | 37 |

Chesterton Flange Sealing Solutions 38 – 39

POLYMER SEALS

Seals Selection Guide..... 40 – 41

RECIPROCATING SEALING SOLUTIONS

Wipers

| | |
|---------------------------|----|
| 21K (Wiper)..... | 42 |
| CW21K (Canned Wiper)..... | 42 |

Rod and Piston Seals

| | |
|---|----|
| 22K (Negative Lip U-Cup Seal)..... | 43 |
| 20K (Bidirectional Compression Seal)..... | 43 |
| CCS (Custom Cap Seal)..... | 44 |

Bearing Elements and Anti-Extrusion Rings

| | |
|---|----|
| 9K (Anti-Extrusion Ring)..... | 44 |
| 18K (Inch)/19K (Metric) Bearing Band..... | 45 |
| 16K (Metric)/17K (Inch) Bearing Band Strip..... | 45 |
| WR (Custom Wear Ring)..... | 46 |

Stacked Assemblies

| | |
|--|----|
| 27K (V-Ring Stacked Set)..... | 47 |
| 11K (Two-Piece Split Stacked Set)..... | 47 |

ROTARY SEALING SOLUTIONS

Continuous Rotary Seals

| | |
|--------------------------------------|----|
| 30K (Continuous PTFE Lip Seal)..... | 48 |
| 30KC (Cartridge Multi Lip Seal)..... | 49 |
| Polymer Labyrinth Seal (PLS)..... | 49 |

Split Rotary Seals

| | |
|---|----|
| 24K (Slow Rotary Seal)..... | 50 |
| 33K (Low-Pressure Rotary Seal)..... | 50 |
| Matrix Seal (Low-Pressure Rotary Seal)..... | 51 |
| SPLS (Split Polymer Labyrinth Seal)..... | 52 |

Restriction Bushings

| | |
|---------------------------------|----|
| 14K (Restriction Bushings)..... | 52 |
|---------------------------------|----|

STATIC SEALING SOLUTIONS

D-Rings

| | |
|-------------------------------------|----|
| 20KD (Static Compression Seal)..... | 53 |
|-------------------------------------|----|

O-Rings

| | |
|--------------------------------|----|
| OR (Face and Static Seal)..... | 53 |
|--------------------------------|----|

SPRING ENERGIZED SEALS

| | |
|---|----|
| SES 100 Series (Continuous Contact Seal)..... | 54 |
| SES 200 Series (Stacked V-Ring Seal)..... | 55 |
| SES 300 Series (Helical Wound Spring Design)..... | 56 |
| SES 500 Series (Stacked V-Ring Seal)..... | 56 |
| SES 600 Series (Continuous Contact Seal)..... | 57 |

Seal Materials..... 58 – 59

TABLE OF CONTENTS *Continued*

INDUSTRIAL LUBRICANTS AND MRO PRODUCTS

| | |
|--|-----------|
| Oils and Greases Product Selection Guide | 60 |
| Industrial Oils | |
| 610 Plus | 61 |
| 610 MT Plus | 61 |
| 610 HT | 61 |
| 650 AML | 62 |
| 601 | 63 |
| 652 | 63 |
| 690 FG | 63 |
| 720 CCG (Chain, Cable, Gear Lubricant) | 64 |
| 715 | 65 |
| 715 Gold | 65 |
| Industrial Greases | |
| 615 HTG #1 | 65 |
| 615 HTG #2 | 65 |
| 615 HTG #2-460 | 65 |
| 625 CXF | 65 |
| 630 SXCF | 66 |
| 630 SXCF 220 #1 (Not available in EMEA) | 66 |
| 635 SXC | 66 |
| 638 EMG 100/638 EMG 46 | 66 |
| Anti-Seizes | |
| 725 | 67 |
| 772 | 67 |
| 783 ACR | 67 |
| 785/785 FG | 68 |
| Maintenance Specialties | |
| 390 | 68 |
| 723/723 FG Sprasolvo™ | 68 |
| 730 Spragrip® | 69 |
| 740 and 775 | 69 |
| 752 | 69 |
| 763 Rust Transformer™ | 70 |
| 800 GoldEnd® Tape | 70 |
| 900 GoldEnd® Paste | 70 |
| 860 | 71 |
| Cleaners and Degreasers Product Selection Guide | 72 |
| 274 | 72 |
| 276 | 73 |
| 279 PCS (Not available in EMEA) | 73 |
| 292 PDS/294 CSD (292 not available in EMEA) | 73 |
| 296 (Not available in EMEA) | 74 |
| 803 | 74 |
| KPC 820/820N (820N Not available in EMEA) | 74 |
| Automatic Lubricant Dispensers | |
| Lubri-Cup™ EM (Some not available in EMEA) | 75 |
| Lubri-Cup™ OL 500 Oiler | 75 |
| Lubri-Cup™ VG (Not available in EMEA) | 76 |
| Lubri-Cup™ VG Mini | 76 |
| Lubri-Cup Products—Featured Summary | 77 |

ARC INDUSTRIAL COATINGS


| | |
|---|-----------|
| Product Application Guide | 78 |
| Erosion Resistant Coatings for Metal | |
| 855 | 79 |
| 858 | 79 |
| Coatings for Corrosion, Erosion, and Chemical Attack for Metal | |
| S4+ | 80 |
| HT-S | 80 |
| S5 | 81 |
| S2 | 81 |
| S1PW | 82 |
| S1HB | 82 |
| SD4i | 83 |
| Abrasion Resistant Composites for Metal | |
| BX5 | 84 |
| I BX1 | 85 |
| I BX1 RC (Not available in EMEA) | 85 |
| BX1 | 86 |
| BX2 | 86 |
| MX1 | 87 |
| MX2 (Not available outside of EMEA) | 87 |
| MX FG | 88 |
| Resurfacing Coatings for Concrete | |
| EG-1/EG-1 FC (EG-1 FC not available in EMEA) | 88 |
| 791 | 89 |
| 988 | 90 |
| Thin Film Composites for Concrete | |
| 797 | 90 |
| CS2 | 91 |
| CS4 | 92 |

ORDERING AND CERTIFICATION INFORMATION

| | |
|-----------------------------|-----------|
| Ordering Information | |
| ARC | 93 – 94 |
| Mechanical Seals | 95 |
| Packing and Gaskets | 96 – 103 |
| IL/MRO Products | 104 – 105 |
| Polymer Seals | 106 |
| Certifications | |
| Polymer Seals | 106 |
| Mechanical Seals | 106 |
| Packing and Gaskets | 107 |
| ARC | 107 |
| IL/MRO Products | 108 – 109 |

Chesterton® Solutions for Rotating Equipment

Whether you are looking for advanced shaft sealing, gearbox protection, system lubrication, or protective coatings, Chesterton provides total solutions for improved pump reliability.

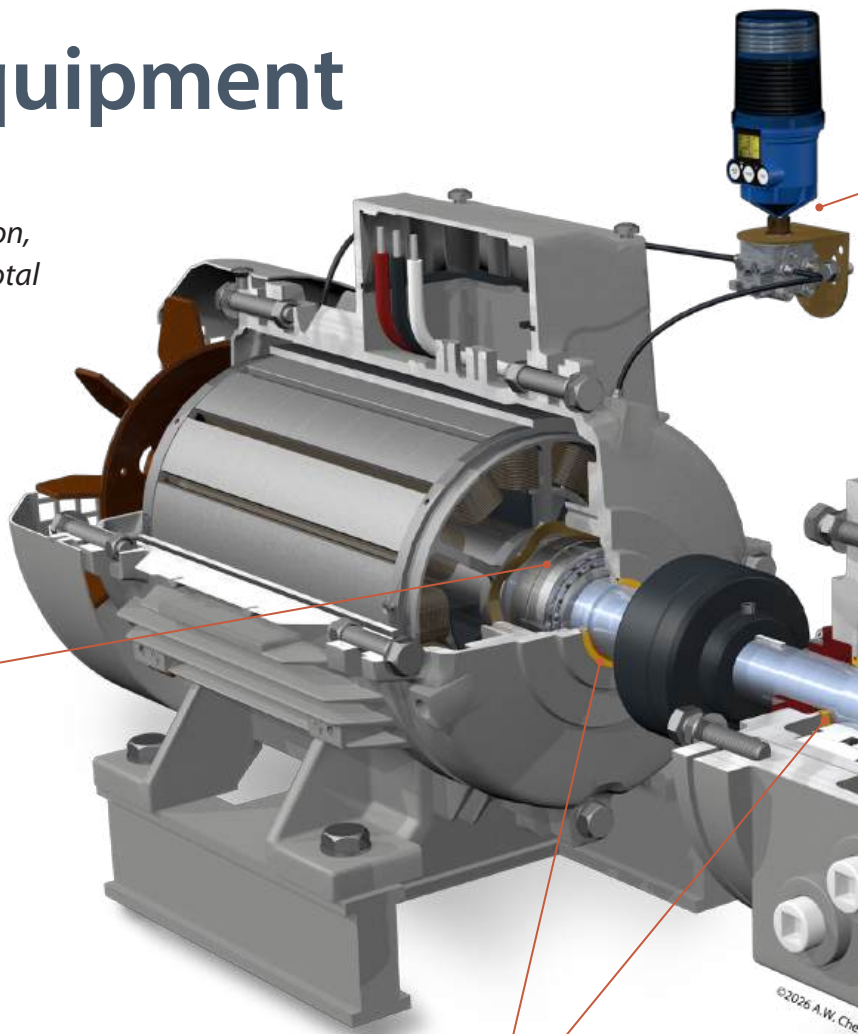

Advanced Lubrication Technology



ARC Industrial Coatings

Machinable Composite



Coatings for Concrete



Bearing Protection Lip Seal



Split Polymer Labyrinth Seal



Maintenance and Repair Products

Cleaners and Degreasers



Anti-Seizes



Thread Sealants



Moldable Gasketing



**Automatic Microprocessor
Controlled Dispensing System**



Split Seals



Cartridge Seals



Gaskets – Sheet and Cut




Pump Packings



SuperSet™



Restriction Bushings




**Engineered Stuffing
Box Seals**



**Protective Coatings
for Metals**



Environmental Controls

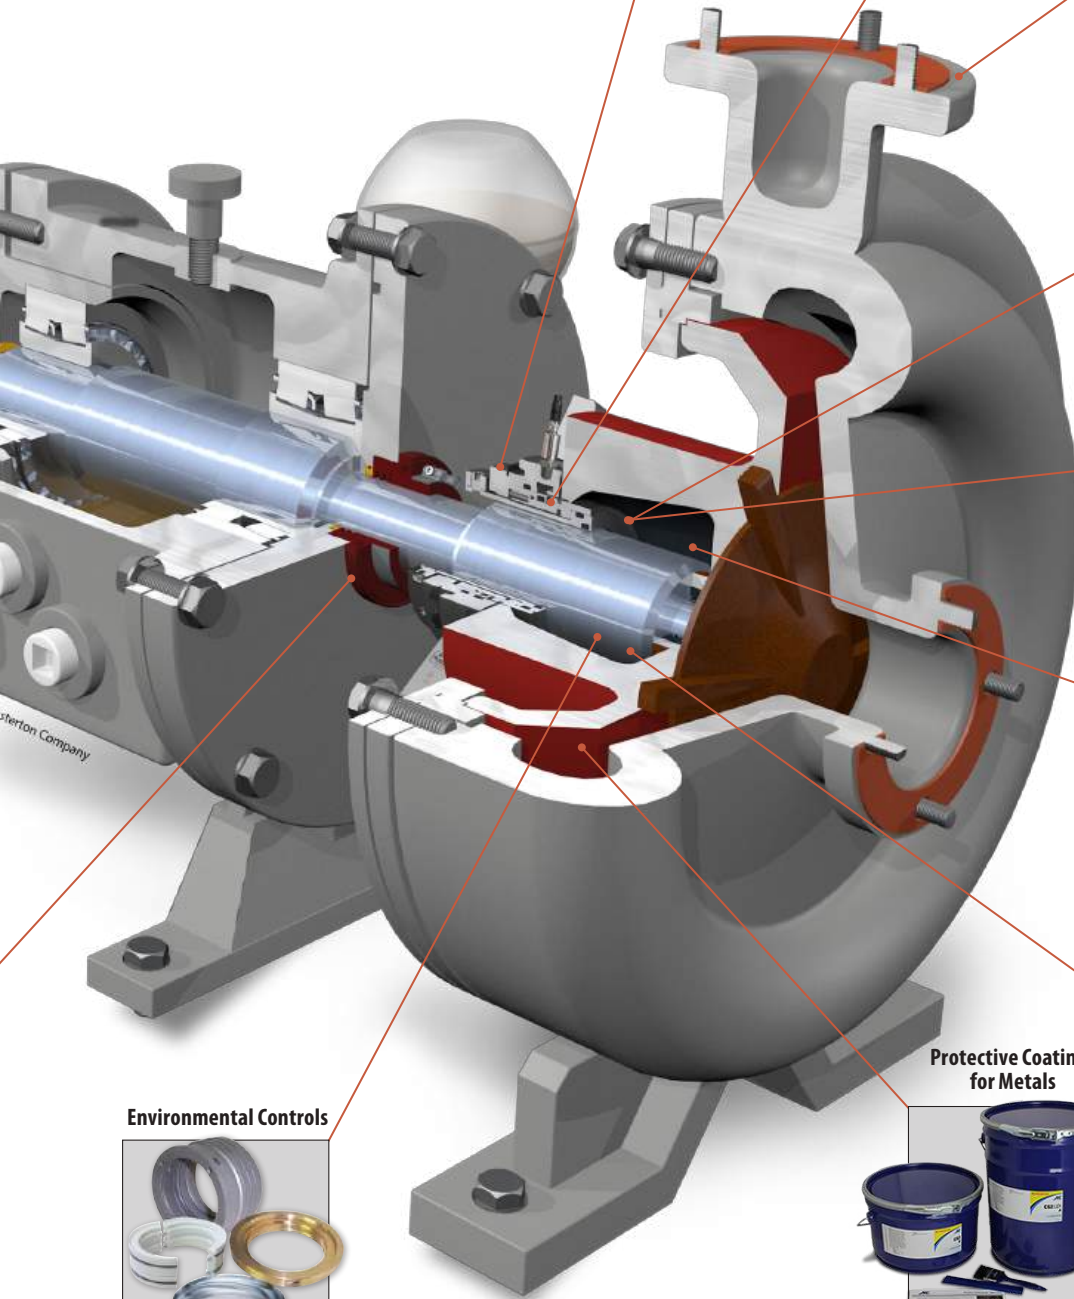

Product Selection Guide

| Portfolio | Product | Equipment Type | Duty | | | | | | | |
|--|-------------------------|--|--|-----------------|--------|-----------------|--------------------------------|------------------|-------------------|--------|
| | | | Large Equipment | General Service | Solids | Corrosive Media | Crystallizing/ Coking Media | High Temperature | Emissions Control | Motion |
| Split Seals Install and replace without disassembling. Split seals reduce maintenance labor, cut repair costs, and significantly increase equipment uptime, particularly on hard-to-access or critical service pumps where downtime carries the highest penalties. | 442/442C | Pumps, Mixers/ Agitators, Hydropower Turbines | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| | 442PR | Condensate, Boiler Feed Pumps | ✓ | | | | | ✓ | | |
| Cartridge Seals Factory-tested, pre-assembled units designed across a broad range of industrial applications. Cartridge designs eliminate the need for on-site measurement and adjustment, reducing installation errors and delivering proven, repeatable performance straight out of the box. | 150/150L | Pumps | | ✓ | | ✓ | | | | |
| | 250/250L | | | ✓ | | ✓ | | | | |
| | 1510 | | | ✓ | | | | | | |
| | 510 | | | ✓ | | ✓ | ✓ | | | |
| | 520 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | 1810 | Pumps, Mixers, and Agitators | ✓ | | ✓ | ✓ | ✓ | | ✓ | |
| | 1810H/ 1810PR | Condensate, Boiler Feed Pumps | ✓ | | | | | ✓ | | |
| | 2810 | Pumps | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Gas Seals Purpose-built for standard ANSI/ISO pumps with plug-and-play simplicity. The integrated In-Gland Control System (IGCS) automatically adjusts barrier gas to match changing process conditions, reducing operator intervention and improving seal reliability. | 4400 | Pumps, Mixers, and gitators | ✓ | | | ✓ | | | ✓ | ✓ |
| Slurry Seals Robust, non-clogging design handles up to 40% solids concentration without flush water, extending both seal and pump life in abrasive, high-wear service. Engineered to maintain sealing integrity where conventional designs quickly fail, reducing the frequency of unplanned maintenance on slurry pumps. | 170 | Pumps and Mixers | ✓ | | ✓ | | | | | ✓ |
| Mixer/Motion Seals Engineered to tolerate the higher runout, shaft deflection, and angular misalignment common in top, side, and bottom entry mixer and agitator applications. Built on proven rotary sealing technology and adapted for the unique mechanical demands that standard pump seals aren't designed to handle. | 442M | Mixers and Agitators | ✓ | | | | | | | ✓ |
| Seal Support Systems Auxiliary hardware, and controls that pair with mechanical seals to maintain optimal operating conditions in the seal environment. Designed to meet a wide range of environmental and process requirements, helping maximize seal life and overall process availability across applications. | SpiralTrac® | Pumps, Mixers, and Agitators | Can be used with all sealing systems to remove solids from the sealing area. | | | | | | | |
| | Barrier/Buffer Tanks | | Used with all Dual Seal applications. | | | | | | | |
| | Inflatable Safety Seals | | Used with split seal applications to statically seal tanks and vessels to facilitate maintenance without the need to drain the system. | | | | | | | |
| | Restriction Bushings | | Used with single seal applications to reduce flush water consumption and reduce process contamination. | | | | | | | |

*Recommendations are general in nature, apply within published operating limits, and assume appropriate environmental controls are in place. For application-specific guidance, please contact Chesterton Application Engineering.

CARTRIDGE SEALS


1510

General Duty Single Cartridge Seal

Simple installation and increased reliability plant-wide in general duty applications

Maximize maintenance efficiency and increase plant productivity with the 1510 Single Cartridge Seal. Designed to fit process equipment plant-wide by incorporating Chesterton T.A.B.S.™ (Tapered Adjustable Bolting System), the compact profile makes seal installation easy.


The use of monolithic seal faces and true non-fretting construction offers reliability through temperature variations and intermittent operations. Impeller adjustments after seal fitment are accommodated with the unique resettable centering strap, even when adjustment is required between routine maintenance. Incorporating Chesterton's 5 key features of good mechanical seal design, the 1510 sets the new standard for general duty cartridge seals.

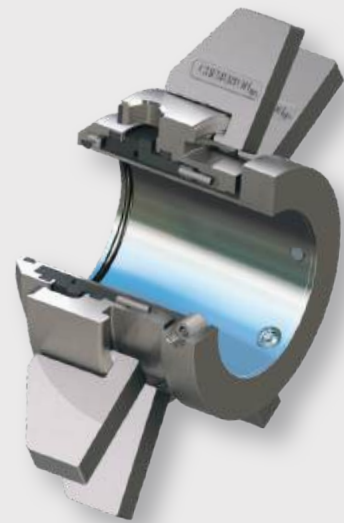

- Reliable through temperature cycling and intermittent process with monolithic seal faces
- In-service impeller adjustment is possible with the unique centering strap
- Mounts easily on various types of rotating equipment using Chesterton T.A.B.S.
- Prevents damage to your equipment and internal components via true non-fretting design

Variants

- 1510L
Single Screw Clamp Lock Ring

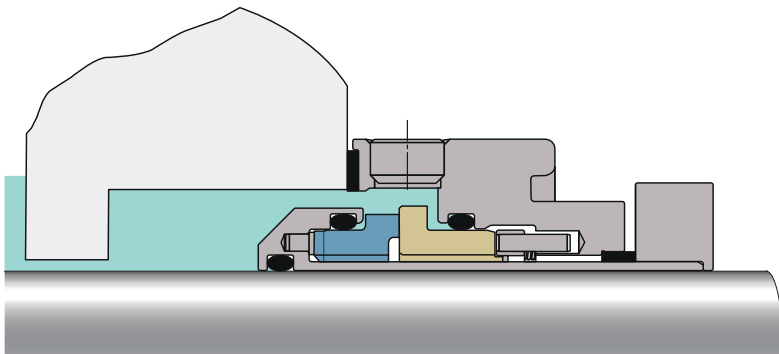

Five Key Seal Design Features



- ✓ *Balanced Design*
- ✓ *Non-Fretting*
- ✓ *Monolithic Seal Faces*
- ✓ *Stationary Design*
- ✓ *Protected Springs*

| Operating Conditions | | Materials | |
|----------------------|--|-------------------|---|
| Size | 25 mm – 120 mm (1.000" – 4.750") | Faces | CB, SSC, TC |
| Pressure | 711 mm (28") Hg Vacuum – 20 bar g (300 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | 55°C – 300°C (-67°F – 570°F) <i>Temperature limits depend on actual elastomers used</i> | Metals | EN 1.4401 (316SS) <i>Other Metallurgies available on request</i> |
| Speed | 25 m/s (5000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, NSF-61, WRAS

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

150/150L


Single Cartridge Seal

The 150 is a value leader in its class. It is the ideal choice to reduce high maintenance costs and help prevent wasteful leakage, shaft fretting damage, and inefficient downtime.

The Chesterton® 150 Single Seal delivers reliable, cost-effective performance for general industry applications. Designed as an upgrade from packing or component-style seals, its compact cartridge fits standard ANSI/ISO process pumps for quick, consistent installation. The single-screw clamp lock ring (150L) simplifies setup and reduces installation errors. Refined through advanced computer modeling, the seal's optimized face geometry improves lubrication for cooler operation and longer service life. With proven Chesterton quality, the 150 helps cut maintenance costs, prevent leakage and shaft wear, and maximize equipment uptime.



- Constructed of high quality materials
- Fits popular ANSI/ISO and vertical pumps
- Fast and easy installation
- Field and factory repairability
- Worldwide, off-the-shelf availability

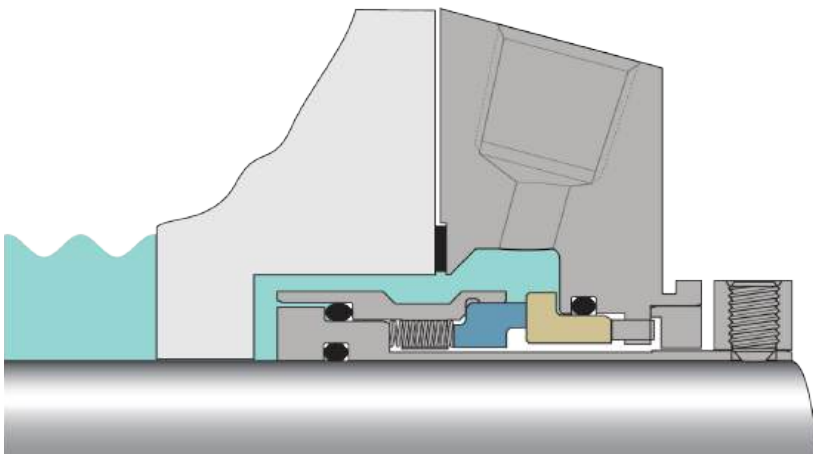

| Operating Conditions | | Materials | |
|----------------------|---|------------|-------------------------|
| Size | 25 mm – 120 mm (0.938" – 4.75") | Faces | CB, SSC, TC |
| Pressure | Vacuum to 20 bar g (300 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -30°C – 200°C (-207°F – 400°F) Temperature limits depend on actual elastomers used | Metals | EN 1.4401 (316SS) |
| Speed | Up to 3600 rpm | Springs | EN 2.4819 (Alloy C-276) |

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

250/250L


Double Cartridge Seal

The 250 double cartridge seal is a value leader in its class. With proven Chesterton quality, it is the ideal choice for optimizing the seal environment and increasing performance.

The Chesterton 250 Double Cartridge Seal is a value leader designed for reliable, high-performance sealing. Offering security beyond packing and traditional single seals, its compact ANSI/ISO-compatible cartridge installs quickly and consistently. The 250L model features a single-screw clamp lock ring that simplifies installation and reduces error. Engineered with computer-modeled face geometry and a robust double-balanced design, the 250 runs cooler, lasts longer, and enhances sealing reliability. Backed by proven Chesterton quality, it's a cost-effective upgrade that optimizes seal performance and maximizes equipment uptime.



- Constructed of high quality materials
- Fits popular ANSI/ISO and vertical pumps
- Fast and easy installation
- Field and factory repairability
- Worldwide, off-the-shelf availability

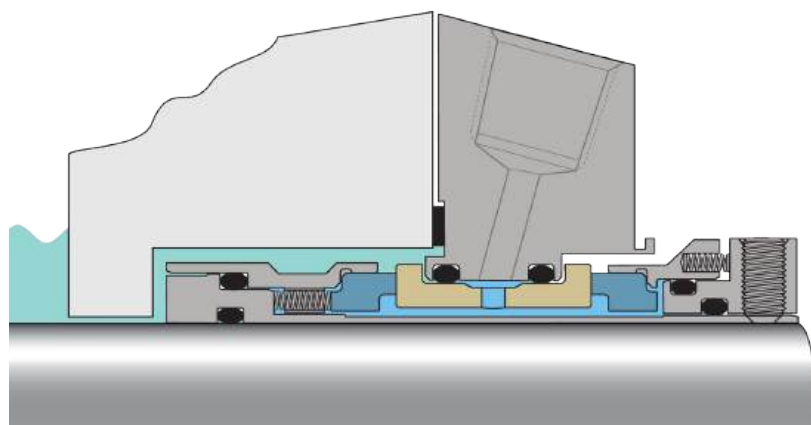

| Operating Conditions | | Materials | |
|----------------------|---|------------|-------------------------|
| Size | 25 mm – 120 mm (1.00" – 4.75") | Faces | CB, SSC, TC |
| Pressure | Vacuum to 20 bar g (300 psig)* process pressure 10 bar g/150 psig maximum barrier pressure | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -30°C – 2050°C (-20°F – 400°F) Temperature limits depend on actual elastomers used | Metals | EN 1.4401 (316SS) |
| Speed | 20 m/s (4000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

S10



Performance Single Cassette Seal

Unique modular cassette that combines advanced seal technology with flexibility in maintenance and repair

Simplify seal maintenance and increase equipment reliability with the Chesterton S10 Cassette Seal. Featuring a self-centering lock ring and self-releasing setting clips, the S10 offers quick, easy and accurate installation. The seal design increases seal capabilities and reduces the likelihood of seal-related downtime and associated overhaul costs. The unique cassette system allows for fast seal repair and plant-wide standardization.

Performance is ensured by Chesterton five key design features:

- No clog springs ensure consistent performance
- Monolithic seal faces remain flat during temperature cycling
Balanced design reduces friction, wear and heat
- Stationary springs prevent faces from opening at elevated speeds
O-Rings positioned to never fret or damage the equipment or the seal

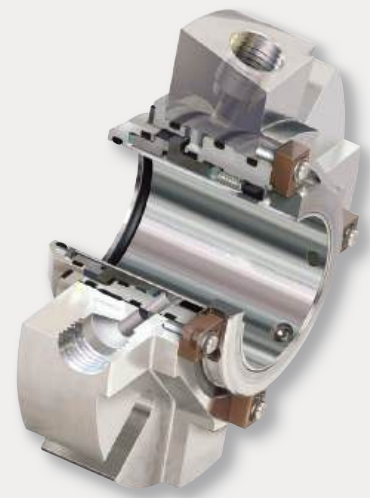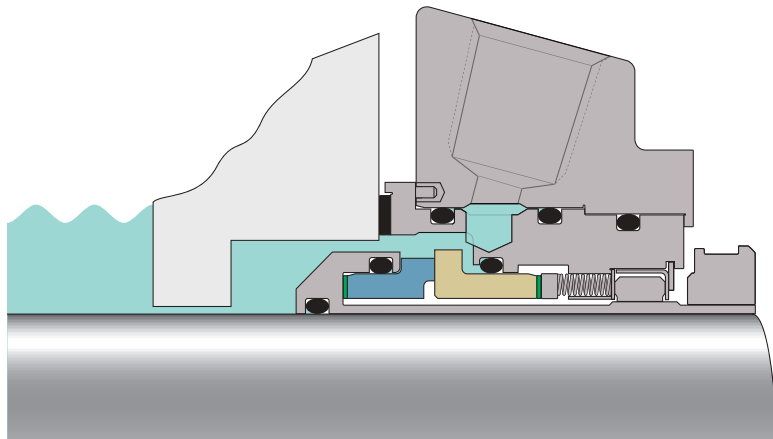**One optimized sealing concept for plant-wide standardization**

- Full featured universal gland with quench/drain and multiport flush
- Quick to repair with innovative cassette feature

| Operating Conditions | | Materials | |
|----------------------|--|-------------------|-------------------------|
| Size | 25 mm – 120 mm (1.00" – 4.75") | Faces | CB, SSC, TC |
| Pressure | 711 mm (28") Hg Vacuum – 31 bar g (450 psig)* | Elastomers | FKM, EPDM, FEP, FFKM |
| Temperature | -55°C – 300°C (-67°F – 570°F) Temperature limits depend on actual elastomers used | Metals | EN 1.4401 (316SS) |
| Speed | 25 m/s (5000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

S20

Performance Cassette Double Seal

Unique modular cassette that combines advanced seal technology with flexibility in maintenance and repair

Simplify seal maintenance and increase equipment reliability with the Chesterton S20 Cassette Seal. Featuring a self-centering lock ring and self-releasing setting clips, the S20 enables quick, easy and accurate installation. Sealing security is ensured by the tandem configuration allowing operation with elevated barrier system pressures and preventing process leakage to the atmosphere.


The S20 offers key seal performance benefits:

- Tandem configuration for dependable sealing security
- High flow internal pumping ring
- Self-Centering Lock Ring eliminates misalignment
- Advanced monolithic face design
- Micropolished O-Ring surfaces eliminate O-Ring hang-up



One optimized sealing concept for plant-wide standardization

- Tandem seal design for reliable dual sealing
- Quick to repair with innovative cassette feature

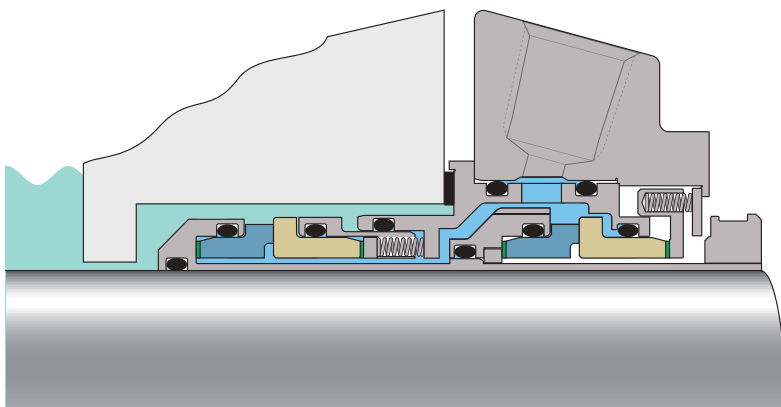

| Operating Conditions | | Materials | |
|----------------------|--|-------------------|-------------------------|
| Size | 25 mm – 120 mm (1.00" – 4.75") | Faces | CB, SSC, TC |
| Pressure | 711 mm (28") Hg Vacuum – 31 bar g (450 psig)* 17 bar g/250 psig inboard differential* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -55°C – 300°C (-67°F – 570°F) Temperature limits depend on actual elastomers used | Metals | EN 1.4401 (316SS) |
| Speed | 25 m/s (5000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

1810

Heavy-Duty Modular Single Cartridge Seal


Built on Chesterton's AXIUS™ modular platform for simple configuration and installation plant-wide

The 1810 Single Cartridge Seal offers you the ultimate in seal quality, flexibility, and convenience. Leveraging Chesterton's proprietary AXIUS modular platform, the 1810 can be configured with several different face profiles and auxiliary components which allows seal performance to be tailored to a wide range of process conditions.

A plant-wide sealing solution, the 1810 is effective for both simple and highly demanding applications. It offers selectable features around a common gland housing. This flexibility allows for the creation of the best sealing parameters for your equipment and application needs to maximize single seal reliability.



- Simplifies configuration and maximizes seal performance with the AXIUS™ modular platform
- Maintains reliability throughout temperature cycling and stop/start processes with monolithic seal faces
- Increases face life and reduces contact stress with cushioned drive pins

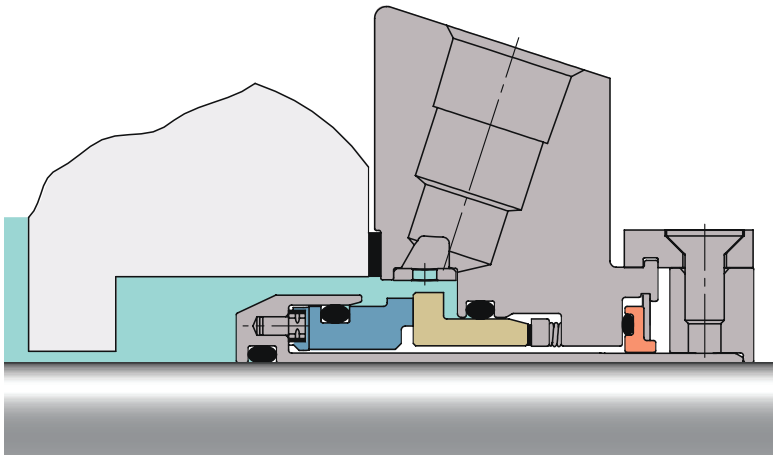

Five Key Seal Design Features



- ✓ *Balanced Design*
- ✓ *Non-Fretting*
- ✓ *Monolithic Seal Faces*
- ✓ *Stationary Design*
- ✓ *Protected Springs*

| Operating Conditions | | Materials | |
|----------------------|---|-------------------|---|
| Size | 25 mm – 200 mm (1.000" – 8.000") | Faces | CB, SSC, TC |
| Pressure | 711 mm (28") Hg Vacuum – 40 bar g (600 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -55°C – 300°C (-67°F – 570°F) | Metals | EN 1.4401 (316SS) <i>Other Metallurgies available on request</i> |
| Speed | 25 m/s (5000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, NSF-61

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

2810

Heavy-Duty Modular Double Cartridge Seal


Built on Chesterton's AXIUS™ modular platform for simple configuration and emission control plant-wide

The 2810 Double Cartridge Seal offers you the ultimate in seal quality, flexibility, and emissions control. Leveraging Chesterton's proprietary AXIUS modular platform, the 2810 can be configured with several different face profiles and auxiliary components within a common gland housing. This flexibility allows seal performance to be tailored to a wide range of process conditions.

A plant-wide sealing solution, the 2810 uses a geometric double-balanced seal face design. An optimized barrier/buffer channel for enhanced fluid flow provides greater seal reliability even at elevated temperatures.



- Simplifies configuration and maximizes seal performance with the AXIUS™ modular platform
- Maintains reliability throughout temperature cycling and stop/start processes with monolithic seal faces
- Increases face life and reduces contact stress with cushioned drive pins
- Accommodates axial, radial, and angular shaft movement through unified seal face alignment

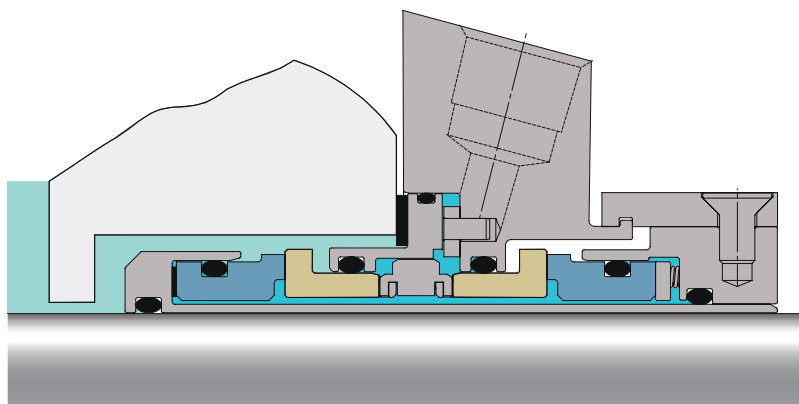

Five Key Seal Design Features



- ✓ *Balanced Design*
- ✓ *Non-Fretting*
- ✓ *Monolithic Seal Faces*
- ✓ *Stationary Design*
- ✓ *Protected Springs*

| Operating Conditions | | Materials | |
|----------------------|---|------------|---|
| Size | 25 mm – 200 mm (1.000" – 8.000") | Faces | CB, SSC, TC |
| Pressure | 711 mm (28") Hg Vacuum – 40 bar g (600 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -55°C – 300°C (-67°F – 570°F) | Metals | EN 1.4401 (316SS) <i>Other Metallurgies available on request</i> |
| Speed | 25 m/s (5000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, ATEX

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.


SPLIT SEALS

442**Split Mechanical Seal**

Eliminates the need for equipment disassembly during seal installation and reduces maintenance costs

The 442 Split Mechanical Seal is ideal for equipment that is difficult and time-consuming to disassemble, such as large pumps, vertical pumps, and horizontal split case pumps. This proven, compact design can be used in a wide variety of equipment and process fluids.


The high performance split technology allows the 442 to operate from vacuum to high pressures. Its compact design allows for easy installation and a fit advantage on most equipment. Split, low-cost repair kits reduce ongoing maintenance costs even further. Designed with the installer in mind, the ball-and-socket O-Rings provide a quick and easy seal without the use of adhesives. Captive screws cannot fall out, making installation straightforward and reliable.

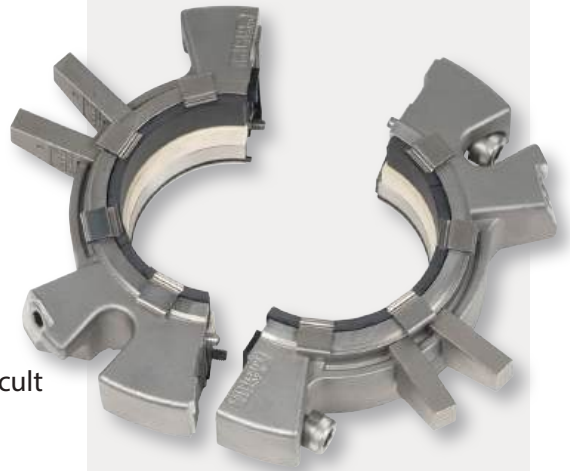

- Easy and fast to install without equipment disassembly
- Proven design with superior performance
- Non-fretting to equipment
- Compact design

Variants

- Mixer version available
- Pumping Ring (PR) version available

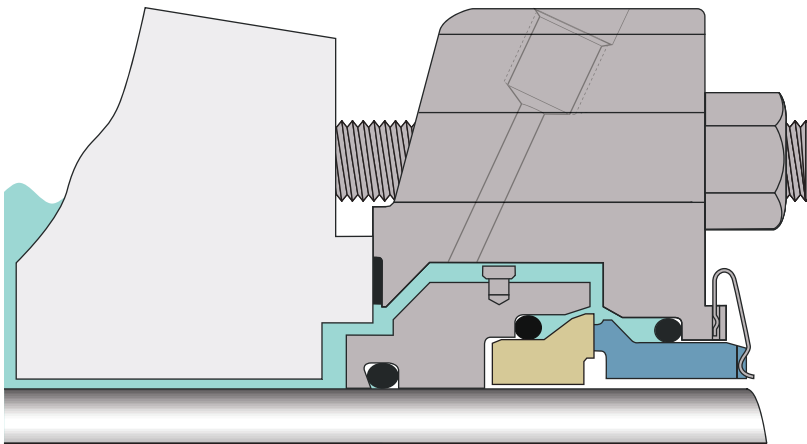

| Operating Conditions | | Materials | |
|----------------------|---|-------------------|---|
| Size | 20 mm – 990 mm (0.750" – 39.000") | Faces | CB, RSC, CR |
| Pressure | 711 mm (28") Hg Vacuum – 30 bar g (450 psig)* | Elastomers | FKM, EPDM, FEPM |
| Temperature | 120°C (250°F) | Metals | EN 1.4401 (316SS) <i>Other Metallurgies available on request</i> |
| Speed | 20 m/s (4000 fpm) | Springs | Elgiloy® |

Standards and Approvals: ISO-3069-S, ASME B73.1, ASME B73.2, NSF61, ACS, ATEX

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

SPLIT SEALS

442C

Cartridge Split Mechanical Seal


Enhanced design for simple installation and greater sealing reliability

The 442C Cartridge Split Mechanical Seal is the latest innovation in split seal technology combining superior performance with the ease of installation of a cartridge split seal. Our split seal technology addresses the inherent limitations found in conventional cartridge split seal designs by minimizing installation complications and excessive leakage. As with all split seals, it offers easy installation and replacement without the need for teardowns.

The 442C design also offers maximum installation flexibility with its short axial length and flexible gland positioning. It simplifies split mechanical seal repair by using a standard spare parts kit, enabling you to lower your inventory costs to maintain operations.



- Simplified split seal installation—without equipment disassembly
- Innovative design with superior performance
- Fits most rotating equipment
- Easy field repair

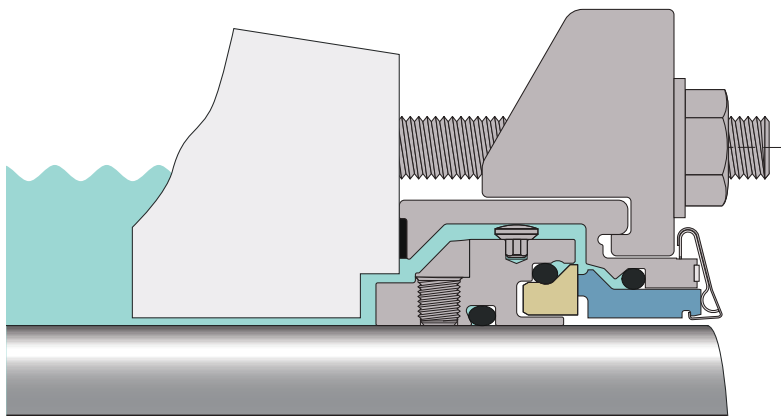

| Operating Conditions | | Materials | |
|----------------------|---|------------|---|
| Size | 25 mm – 195 mm (1.000" – 7.750") | Faces | CB, RSC, CR |
| Pressure | 711 mm (28") Hg Vacuum – 30 bar g (450 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | 120°C (250°F) | Metals | EN 1.4401 (316SS) <i>Other Metallurgies available on request</i> |
| Speed | 20 m/s (4000 fpm) | Springs | Elgiloy® |

Standards and Approvals: ISO-3069-S, ASME B73.1, ASME B73.2, NSF-61


**Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.*

GAS SEALS

4400

Double Concentric Gas Seal

Advanced technology made simple in a gas seal design. The 4400 is a seal for all purposes and provides for an easy gas seal upgrade option. It is an ideal choice for upgrading under-performing, liquid lubricated seals to high performance, non-contacting operation.

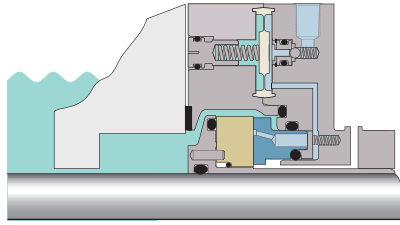

| Operating Conditions | | Materials | |
|----------------------|---|------------|--|
| Size | 25 mm – 90 mm (1.000" – 3.625") | Faces | CB, SSC |
| Pressure | 711 mm (28") Hg Vacuum – 20 bar g (300 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -55°C – 300°C (-67°F – 570°F) | Metals | EN 1.4401 (316SS) Other Metallurgies available on request |
| Speed | 8 m/s (1500 fpm), 25 m/s (5000 fpm) | Springs | EN 2.4819 (Alloy C-276) |

Standards and Approvals: ISO-3069, ASME B73.1, ASME B73.2, ACS

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.


- Offers low cost-of-ownership for a broad range of applications
- Advanced technology that is easy to install and operate
- Exclusive In-Gland Control System eliminates the need and expense of an external gas panel
- Eliminates atmospheric emissions

SLURRY SEALS

170

Slurry Single Cartridge Seal

Engineered to operate in harsh, heavy consistency slurry environments and to eliminate costly external seal flushes in the majority of applications.

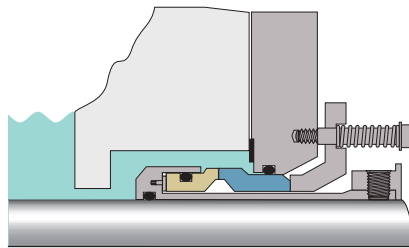

| Operating Conditions | | Materials | |
|----------------------|---|------------|--|
| Size | 25.5 mm – 228.6 mm (1.000" – 9.000") | Faces | SSC, TC |
| Pressure | 711 mm (28") Hg Vacuum – 17 bar g (250 psig)* | Elastomers | FKM, EPDM, FEPM, FFKM |
| Temperature | -55°C – 300°C (-67°F – 570°F) | Metals | EN 1.4401 (316SS), EN 1.4462 (A2205) Other Metallurgies available on request |
| Speed | 11 m/s (2200 fpm) | Springs | EN 2.4819 (Alloy C-276) |

*Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

- Runs longer in heavy abrasive slurries without the need for flush or quench water
- Stationary springs located outside the seal for maximum reliability
- Easy to maintain
- Clamp ring available for ease of installation

SEAL SUPPORT SYSTEMS

SpiralTrac®

Environmental Controller

When used with Chesterton mechanical seals, SpiralTrac Environmental Controllers greatly enhance seal reliability by effective removal of solids and improved cooling of the stuffing box.



| Version | | Materials |
|--------------|--|---|
| F (Split) | Greatly reduced flush | EN 1.4401 (316SS) 416SS PTFE - Glass-Filled PTFE - Carbon Graphite-Filled Bronze EN 3.7035 (Ti) AWC800 - Red Polymer EN 2.4360 (Monel® K400) |
| N | Reduced/no flush in non-fibrous fluids | |
| D | Reduced/no flush in fibrous fluids | |
| P (Split) | Packing version | |
| C | With drain for crystallizing media | |
| Arrangements | | |
| Type A | Counter bore fit | |
| Type B | Bore fit | |
| Type S | Axial split | |
| Type I | Impeller side installation | |
| Type E | Externally keyed | |

- Extends seal reliability in most rotating equipment applications
- Reduces cost of flushing in abrasive applications
- Fits all rotating equipment

Intelli-Flow™ HT

Water Saver

Features a thermally activated valve that automatically drains hot barrier fluid (only when necessary) to keep double seals running cool and reliable. Valve opening temperature preset to work with S20 Seals.



| Operating Conditions | |
|-----------------------|---------------------|
| Pressure | 20 bar g (300 psig) |
| Temperature | 125°C (250°F) |
| Temperature Set Point | 80°C (176°F) |
| Connections | 1/4 NPT |
| Materials | EN 1.4401 (316SS) |

- Clean-in-place
- Maintenance-free
- Easy to install
- Up to 95% water savings compared to open barrier fluid supply

SEAL SUPPORT SYSTEMS

BSS

Buffer Support System for Double Seals

Plan 52 Non-Pressurized Tank. Easy to install, complete, non-pressurized solution for reliable operation of double seals.

| Technical Data | |
|-------------------------|--|
| Tank Capacity | 28 l (7.4 gal) 12 l (3.2 gal) Maximum 9 l (2.4 gal) Operating |
| Tank Operating Pressure | 17 bar (250 psi) Maximum |
| Tank Material | EN 1.4307 (304L) |
| Cooling Capacity | 400 W Tank Only 1.5 kW with Cooling Coil 4 kW with Cooling Coil and Circulation Pump |
| Auxiliary Connection | 1" x 2" NPT and 1" x 1/2" NPT |



- Pre-configured system; simplified ordering process
- Simple maintenance of fluid level

PSS

Pressurized Support System for Double Seals

Standard Plan 53A Tank. Easy to install, complete, pressurized solution for reliable operation of double seals.

| Technical Data | |
|-------------------------|--|
| Tank Capacity | 28 l (7.4 gal) 12 l (3.2 gal) Maximum 9 l (2.4 gal) Operating |
| Tank Operating Pressure | 17 bar (250 psi) Maximum |
| Tank Material | EN 1.4307 (304L) |
| Cooling Capacity | 400 W Tank Only 1.5 kW with Cooling Coil 4 kW with Cooling Coil and Circulation Pump |
| Auxiliary Connection | 1" x 2" NPT and 1" x 1/2" NPT |



- Preconfigured system; simplified ordering process
- Simple maintenance of fluid level
- Standard Plan 53A tank

WSS

Water Saving System for Double Seals

Plan 53P Automatic Water Support Tank. Easy to install, complete solution with minimal water consumption for reliable operation of double seals.

| Technical Data | |
|-------------------------|---|
| Tank Capacity | 28 l (7.4 gal) 12 l (3.2 gal) Maximum 9 l (2.4 gal) Operating |
| Tank Operating Pressure | 17 bar (250 psi) Maximum* |
| Tank Material | EN 1.4307 (304L) |
| Cooling Capacity | 400 W |
| Auxiliary Connection | 1" x 1" NPT and 1" x 1/2" NPT |

*Pressure regulator limit: 125 psi.



- Maintenance-free: automatic level and pressure management
- Minimizes seal support water usage
- Pre-configured system and options for a simplified ordering process

Chesterton Connect™ System

Simplified Pressure, Vibration, and Temperature Equipment Monitoring System

The Chesterton Connect System is a simplified cloud-based equipment monitoring solution that provides 24/7 visibility of an equipment's condition. This real-time equipment monitoring can help you to correlate and identify anomalies early to make operational improvements that increase reliability and minimize unplanned downtime.


The Chesterton Connect System is geared towards pumps and sealing systems but can also be used to monitor vibration on other rotating equipment such as motors and gearboxes.



Chesterton Connect System makes it easy to safely monitor:

- Process temperature
- Process pressure
- 3-Axis vibration (Acceleration, Peak, and Velocity RMS)
- Surface temperature
- Replaceable battery

Chesterton Connect System Facilitates 24/7 Remote Condition Monitoring of Pumps and Rotating Equipment

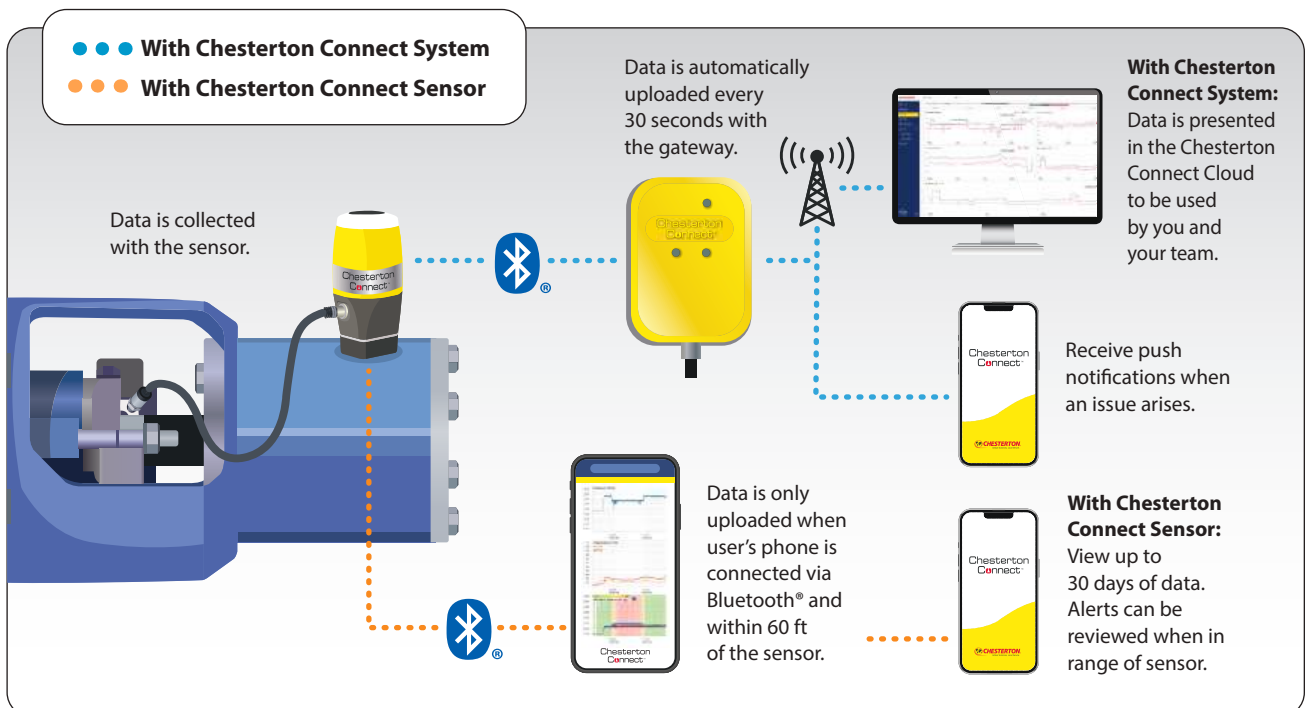


Chesterton Connect™ Cloud

For Early Detection and Reliable Automated Equipment Monitoring

Get full-system connectivity with the cloud

- Receive real-time performance notifications, alerts, and automated reports
- View overall performance and compare and correlate data for multiple pieces of equipment
- Explore variances and trends or compare against published standards
- Add notes for to-do items to make data actionable

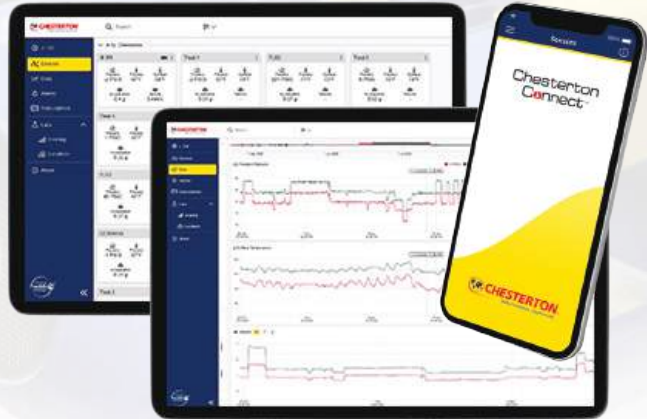

Hardware Technical Specifications



Chesterton Connect™ Sensor Operating Parameters

| | |
|----------------------------|---|
| Pressure sensor limit | -1 bar g – 68 bar g (-14.7 psig – 1000 psig) |
| Temperature limit (body) | -20°C – 85°C (-4°F – 185°F) |
| Temperature limit (sensor) | -20°C – 125°C (-4°F – 257°F) |
| Vibration sensor | 3-axis accelerometer ±16g |
| Battery | 3.6V lithium thionyl chloride battery (replaceable) |
| Fitting | 1/4" NPT 17-4 PH connection |
| Mount | Magnetic mounting base (additional options sold separately) |
| Certifications | FCC, IC, RoHS, IP66, NSF61, ACS, CE |

Hazardous Areas Option

| | |
|----------------|--|
| Certifications | ATEX/IECEx Ⓢ II 1 G Ex ia IIB T4 Ga Ⓢ II 1 D Ex ia IIIB T200 166°C Da |
| Zone | Class I Zone 0 AEx ia IIB T4 Ga Zone 20 AEx ia IIIB T166°C Da |
| Division | Class I Div 1 Groups C D T4 Class II Div 1 Groups F G T4 |
| Rated Temp | -20°C ≤ Ta ≤ +85°C |

Part numbers: Standard Sensor 403700, Intrinsically Safe Sensor 403699



Chesterton Connect™ Gauge Operating Parameters

| | |
|-----------------------------|---|
| Pressure | -1 bar g to 68 bar g (-14.7 psig – 1000 psig) |
| Temperature | -20°C – 85°C (-4°F – 185°F) with the CR2050 battery |
| Power | Battery CR2050 (replaceable) |
| Fitting | 1/4" NPT |
| Material | 17-4PH and polycarbonate enclosure |
| Certifications | IP66/IP67, FCC, CE, RoHS |
| Pressure Accuracy | ±0.25% |
| Temperature Output Accuracy | ±3°C |
| Wireless | Bluetooth® 4.0 |

Part number: 418217



Chesterton Connect™ Gateway Operating Parameters*

| | |
|------------------|--|
| Temperature | Operating range -40°C – 80°C (-40°F – 176°F) |
| Power | Input DC 5V 2A; Power supply 120 – 240VAC |
| Wireless | Bluetooth® 5.0 Single-mode; Category LTE M wireless cellular network |
| Enclosure Rating | IP66 (Power adapter is not IP66 rated) |
| Sensor Range | Up to 182 m (600 ft) |
| Sensor Support | Up to 50 Chesterton Connect devices |

Part numbers: Standard Gateway 415198

*Internet connectivity required.

Packing Product Selection Guide

Please contact your local Chesterton Representative to help you select the best product for your application.

| Family | Product | Media | | | | Duty | | | Key Benefits | |
|-------------------------|---------------|-------|-----------|----------|-------------------|-------------------|-----|-------------|--------------|------------|
| | | Water | Chemicals | Slurries | Food and Beverage | High Temperatures | pH | High Speeds | Reliability | Economical |
| Rotary Packings | DualPac® 2211 | ✓++ | ✓ | ✓++ | | ✓+ | ✓+ | ✓+ | ✓++ | ✓+ |
| | DualPac® 2212 | ✓++ | ✓ | ✓++ | | ✓+ | ✓+ | ✓ | ✓++ | ✓ |
| | 370 | ✓++ | ✓++ | ✓ | | ✓++ | ✓+ | ✓++ | ✓++ | ✓ |
| | 377 | ✓+ | ✓++ | ✓+ | | ✓ | ✓+ | ✓++ | ✓++ | ✓+ |
| | 477-1* | ✓++ | ✓++ | ✓+ | | ✓++ | ✓++ | ✓++ | ✓+ | ✓++ |
| | 1725A | ✓ | | ✓+ | ✓++ | ✓+ | ✓++ | ✓+ | ✓+ | ✓ |
| | 1730 / 1730SC | ✓++ | ✓+ | ✓++ | | ✓+ | ✓+ | ✓ | ✓++ | ✓+ |
| | 1830-SSP | ✓++ | ✓++ | ✓++ | | ✓+ | ✓++ | ✓++ | ✓++ | ✓++ |
| | GraphMax™* | ✓++ | ✓++ | ✓ | | ✓++ | ✓++ | ✓++ | ✓++ | ✓+ |
| | CMS 2000 | ✓++ | | | ✓++ | | ✓ | ✓ | ✓+ | ✓++ |
| Environmental Enhancers | SuperSet™ | ✓ | ✓ | ✓++ | | ✓ | | | ✓++ | ✓ |

| Family | Product | Media | | | Key Benefits | | Equipment | | |
|---------------------|---------|-------|-----------|-----------|--------------|------------|----------------|--------------|------------------------|
| | | Steam | Chemicals | Emissions | Reliability | Economical | Control Valves | Block Valves | Motor Operating Valves |
| Stationary Packings | 1600 | ✓+ | ✓++ | ✓ | ✓+ | ✓+ | | ✓++ | ✓++ |
| | 1601 | ✓++ | ✓+ | | ✓++ | ✓+ | | ✓++ | ✓++ |
| | 1622 | ✓ | ✓++ | ✓++ | ✓++ | ✓+ | | ✓++ | ✓++ |
| | 1724 | ✓ | ✓++ | ✓+ | ✓++ | ✓ | ✓++ | ✓+ | ✓+ |
| | 5800 | ✓++ | ✓++ | | ✓++ | ✓+ | ✓++ | | ✓++ |
| | 6800 | ✓ | ✓+ | ✓++ | ✓++ | ✓+ | ✓++ | | ✓++ |
| | 477-1* | ✓+ | ✓+ | | ✓ | ✓++ | ✓+ | ✓ | ✓+ |

✓++ = Best Choice
 ✓+ = Better Choice
 ✓ = Good Choice
 *Denotes packing can be used in either pump or valve applications.

PUMP, MIXER, AND AGITATOR PACKING

DualPac® Technology

Combining Two Complementary Materials in One Packing

By inventing a new braiding process, Chesterton has successfully combined two materials in a unique way allowing easier expansion under gland load, creating better shaft contact, and increasing leak control even in worn equipment. Both lab and field tests have shown that DualPac packing requires fewer gland adjustments, resulting in drastically extended life in severe service applications.



- Significantly fewer gland adjustments than traditional packing
- Simplifies your inventory: you can use the same packing for end rings and sealing rings
- Better utilization of gland load in sealing configuration
- Requires less overall maintenance
- Minimizes shaft scoring

DualPac® 2212 Packing

High Performance Multi-Purpose Packing

DualPac 2212 packing combines a burn-resistant material on the packing's shaft side with a highly resilient outer fiber.

| Technical Data | |
|---------------------|---|
| Material | Synthetic fibers with lubricants and blocking agents |
| Applications | Demanding rotating equipment such as agitators, mixers, stock pumps, sludge pumps, slurry pumps, and process pumps. |
| Available Sizes | 6.4 mm – 25.4 mm (1/4" – 1") |
| Pressure Limit | 35 bar g (500 psig) |
| Shaft Speed | 10 m/s (2000 fpm) |
| Temperature Limit | 260°C (500°F) |
| Chemical Resistance | pH 3 – 11 |



DualPac® 2211 Packing

Severe Slurry Packing

DualPac 2211 packing provides all of the performance advantages of ePTFE and aramid without the compromises of traditional mixed fibers packing.

| Technical Data | |
|---------------------|--|
| Material | ePTFE and aramid |
| Applications | Slurry processing applications such as ore slurries, mineral handling, and dewatering tailing pumps. |
| Available Sizes | 8 mm – 25.4 mm (5/16" – 1") |
| Pressure Limit | 20 bar g (300 psig) |
| Shaft Speed | 10 m/s (2000 fpm) |
| Temperature Limit | 260°C (500°F) |
| Chemical Resistance | pH 3 – 11 |



PUMP, MIXER, AND AGITATOR PACKING

370

Heat-Dissipating, High-Grade Carbon Yarn Packing

A premium carbon yarn, heat-dissipating pump packing for maximum plant-wide reliability.

Technical Data

| | |
|----------------------------|--|
| Material | High quality, carbon yarn incorporated with particles of pure graphite, high-temperature tolerant oils, and molybdenum disulfide |
| Applications | Pulpers, stock pumps, agitators, fan pumps, vacuum pumps, condensate pumps, screw feeders, and refiners |
| Available Sizes | 3.2 mm – 38 mm (1/8" – 1 1/2") |
| Pressure Limit | 35 bar g (500 psig) |
| Shaft Speed | 18 m/s (3600 fpm) |
| Temperature Limit | 315°C (600°F) steam |
| Chemical Resistance | pH 0 – 14 except oleum, fuming nitric acid, aqua regia, and fluorine |

Note: Can be certified to less than 200 ppm leachable chloride. Consult factory for specific chemical assay.



- Designed for high-temperature seal conditions
- Fast break-in
- Controls leakage with minimal friction
- Reduced leakage and flushing
- PTFE-free

377 CarbMax™


Superior Carbon Fiber Packing

Chesterton 377 CarbMax™ packing combines one of the highest carbon-content fiber yarns using the latest formulations with the newest blocking agents. This yarn provides the enhanced strength and toughness of a continuous multi-filament carbon fiber with additional increased durability.

Technical Data

| | |
|----------------------------|---|
| Material | Continuous filament carbon yarn with a non-silicone proprietary lubricant |
| Applications | Digesters, feeders, impregnation and steaming vessels in the pulp and paper industry, centrifugal pumps, mixers, agitators, and other rotating equipment in a variety of industries |
| Pressure Limit | 34.5 bar g (500 psig) |
| Shaft Speed | 15 m/s (3000 fpm) |
| Temperature Limit | 288°C (550°F) |
| Chemical Resistance | pH 1 – 14 (except strong oxidizers)* |

*Consult Chesterton MP Application Engineering for concerns on compatibility

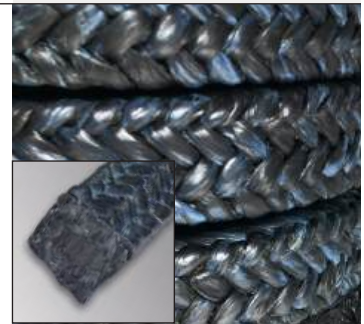

- Densely and tightly braided strong resistance to abrasives
- High carbon content for tensile strength
- Low relaxation reduces maintenance
- High thermal conductivity ensures extended packing life
- High chemical resistance

PUMP, MIXER, AND AGITATOR PACKING

477-1

Multi-Purpose Carbon Fiber Packing

A carbon yarn formulation combined with superior blocking agents for greater flexibility and sealing. This multi-purpose packing offers users increased sealing capabilities both in rotating and stationary equipment applications.

Technical Data

| | |
|----------------------------|--|
| Material | Low modulus carbon fiber |
| Applications | Virtually all pumps and valves against most solvents, gases, and other liquids |
| Available Sizes | 3.2 mm – 25.4 mm (1/8" – 1") |
| Pressure Limit | 250 bar g (3600 psig) valves; 14 bar g (200 psig) pumps |
| Shaft Speed | 15 m/s (3000 fpm) |
| Temperature Limit | 565°C (1050°F) |
| Chemical Resistance | pH 0 – 13 except with strong oxidizers |



- Strong, yet pliable, continuous filament carbon yarn
- Unique inorganic blocking agent inhibits gas/liquid penetration
- Molybdenum-based corrosion inhibitor protects against stem pitting

1725A

Food Process Packing

A premium, expanded PTFE yarn with a specially designed lubricant to provide superior sealing capability in rotating equipment.

Technical Data

| | |
|----------------------------|--|
| Material | Expanded PTFE yarn |
| Applications | Chemical- and food-grade rotating equipment except for strong oxidizers and molten alkali metals |
| Available Sizes | 6.4 mm – 25.4 mm (1/4" – 1") |
| Pressure Limit | 22 bar g (325 psig) |
| Shaft Speed | 9 m/s (1800 fpm) |
| Temperature Limit | Minimum: -29°C (-20°F) Maximum: 232°C (450°F) |
| Chemical Resistance | pH 0 – 14 |



- Meets USDA requirements for minimal food contact
- Meets FDA requirements 21 CFR 178.3297, 21 CFR 177.2800, 21 CFR 177.1550
- Approved by NSF/ANSI and ACS standards for use in drinking water systems
- Completely inert to most materials
- Handles high shaft speeds

PUMP, MIXER, AND AGITATOR PACKING

1730/1730SC

1730: Glaze-Resistant General Service Packing


A superior, user-friendly, pump packing that drastically reduces the chance of glazing the packing and damaging the shafts.

1730SC: Silicone Core Packing

Chesterton 1730SC packing combines a resilient, silicone rubber core with the heat-resistant fiber of Chesterton 1730 packing.

Technical Data

| | |
|----------------------------|---|
| Material | Heat-resistant fibers with lubricants and blocking agents |
| Applications | Black liquor pumps, chemical pumps, agitators, mixers, blenders, washers, pulpers |
| Available Sizes | 1730: 6 mm – 25.4 mm (1/4" – 1") 1730SC: 9.5 mm – 25.4 mm (3/8" – 1") |
| Pressure Limit | 28 bar g (400 psig) |
| Shaft Speed | 10 m/s (2000 fpm) |
| Temperature Limit | 1730: 290°C (550°F), 1730SC: 230°C (450°F) |
| Chemical Resistance | 1730: pH 1 – 13, 1730SC: pH 2 – 12 |

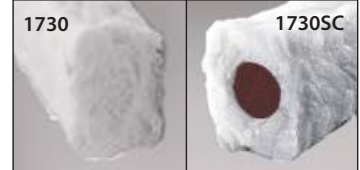

1730

- Easy and fast break-in
- Abrasion-resistant, while non-scoring
- Good chemical resistance
- Glaze-resistant
- User-friendly

1730SC

- Rugged, easy-to-use, general service packing
- Withstands radial shaft motion and vibration
- Handles shaft/bore eccentricity

GraphMax™

Interbraided Exfoliated Graphite Packing for Pumps and Valves

Structurally reinforced graphite packing for demanding applications to dramatically improve the packing's resistance to extrusion.

Technical Data

| | |
|----------------------------|--|
| Material | Interbraided graphite packing with carbon yarns incorporated in the braided structure in a way that allows a very tight braid |
| Applications | Boiler feed, condensate, hot water, heater drains, and other high demanding pump applications. Also can be used on valves in hard to seal service. |
| Available Sizes | 9.5 mm – 25.4 mm (3/8" – 1") |
| Pressure Limit | 206 bar g (3000 psig) valves; 28 bar g (400 psig) pumps |
| Shaft Speed | 17 m/s (3400 fpm) |
| Temperature Limit | Minimum -240°C (-400°F) Maximum 650°C (1200°F) steam service |
| Chemical Resistance | pH 0 – 14 except oleum, fuming nitric acid, and aqua regia |



- Exclusive construction for plant-wide use in pumps and valves
- Maintains structural integrity for easy removal
- Carbon fiber-reinforced graphite strands provide maximum extrusion resistance and high-pressure capability

PUMP, MIXER, AND AGITATOR PACKING

1830-SSP

Slurry Packing

Designed with a hybrid yarn and combining advanced, expanded, graphite PTFE yarn with carbon yarn reinforcement.

| Technical Data | |
|---------------------|--|
| Material | Carbon-reinforced, expanded, graphite PTFE |
| Applications | Bauxite slurries, bottom ash slurry pumps, mineral handling slurries, tailings pumps, and other slurry processing applications |
| Available Sizes | 8.0 mm – 25.4 mm (5/16" – 1") |
| Pressure Limit | 28 bar g (400 psig) |
| Shaft Speed | 18 m/s (3600 fpm) |
| Temperature Limit | 260°C (500°F) |
| Chemical Resistance | pH 0 – 14 with exception of strong oxidizers in the 0 – 2 pH range |



- Developed to meet rigid demands of slurry sealing applications
- Excellent chemical resistance
- Low friction, less heat generation, non-abrasive, saves shafts and shaft sleeves

CMS 2000

Injectable Packing System

Chesterton CMS 2000 Injectable Packing System is an advanced, flushless, stuffing box leakage control sealant made of high-purity, reinforced fiber.

| Technical Data | |
|---------------------|--|
| Applications | Stock pumps, white water pumps, river water pumps, condensate pumps, water treatment pumps, and also rotating equipment applications in the food processing and handling industry. |
| Pressure Limit | 14 bar g (200 psig) White 7 bar g (100 psig) FP |
| Shaft Speed | 10 m/s (2000 fpm) White 6 m/s (1200 fpm) FP |
| Temperature Limit | 205°C (400°F) |
| Chemical Resistance | pH 1 – 13 White not recommended for oxidizers, fluorine, chlorine trifluoride and related compounds, and molten alkali metals pH 0 – 14 FP |



- Eliminates flush and reduces leakage to insignificant levels
- Will not score shaft sleeves
- Effective with worn, fretted sleeves
- Never disassemble to repack again

Also available: Online Injector

The Online Injector can be attached directly to the lantern ring inlet port with a fitting that allows for topping off of the CMS 2000 as needed—without the need to carry additional equipment.




PUMP, MIXER, AND AGITATOR PACKING

SuperSet™

Flush Management Combination Set

Chesterton performance pump packing combined with the patented SpiralTrac® environmental controller increases pump uptime by maximizing packing life and reducing sleeve wear with innovative technology.



- Increases equipment MTBR
- Reduces shaft sleeve wear

| Versions Available | Applications |
|------------------------|---|
| DualPac® 2211 SuperSet | Highly aggressive slurry processing applications |
| DualPac® 2212 SuperSet | High performance, multi-purpose packing |
| 1730 SuperSet | General service in slurries and clean fluids |
| 1400R SuperSet | Worn equipment, high-speed and high-temperature applications |
| 1760 SuperSet | Highly aggressive chemical environments oxidizers in the 0 – 2 pH range |
| 370 SuperSet | High performance, high-temperature applications |
| GraphMax™ | High-temperature and applications needing extrusion resistance |

The AMPS™ System

The AMPS System: Automated Readjustments

The AMPS Unit automatically keeps a constant force on the packing at all times while the pump is in service. This process, known as Active Loading, maintains a uniform and consistent load that eliminates manual packing adjustments and maximizes performance and packing life.

The AMPS System is made of two components that work together to automatically and efficiently seal packed rotating equipment.



- Keeps leakage low
- Reduces maintenance
- Improves sealing performance
- Increases operator safety
- Remote gland load management

AMPS Unit

- Piston actuators
- Single or dual design
- Attaches to existing box glands and bolts
- Provides constant energizing force to packing

Control Unit

- Single-point adjustment of pressure regulator
- Mounted remotely at a convenient location
- Compressed air and water powered system



VALVE PACKING

1622

Emission Control Packing for Block Valves




Low E Packing for Exceptional Emissions Control

Chesterton 1622 Emissions Packing is designed to minimize valve emissions and exceeds current emissions requirements for the refinery, petrochemical, and chemical industries. 1622 packing has received both the 2010 National Pollution Prevention Roundtable MVP² and the 2011 Vaaler Award for emission and pollution reduction technology.

Guaranteed* to seal less than 100 ppm for 5 years per EPA method 21.

Independently tested and proven to provide an average <2 ppm

In API 622 testing, 1622 packing had an average emissions rate of <2 ppm and a onetime maximum of 18 ppm. These extremely low rates were achieved without gland adjustments for 1510 strokes and five temperature cycles. Now you can easily meet emissions compliance for block valves utilizing Chesterton 1622 Emissions Packing.

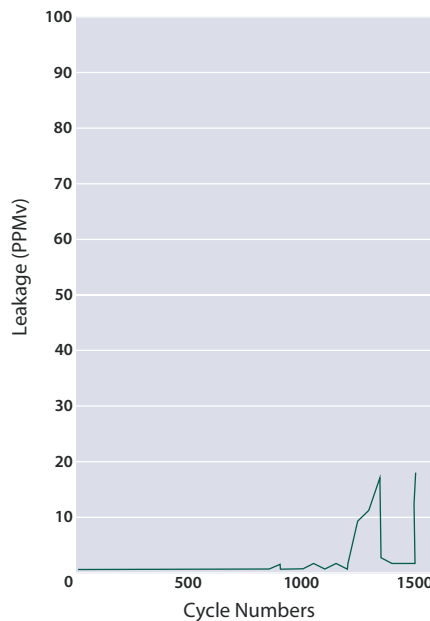

Applications

Light and heavy hydrocarbons, VOCs, VHAPs, steam, and most non-oxidizing chemicals.

*conditions apply

Yarmouth Research and Technology, www.yarmouthresearch.com



- Extremely low emissions
- Fire safe to API 607
- Single spool packing
- High-pressure capability
- API 622 3rd edition tested and qualified
- API 624 tested a qualified for numerous valve OEMs
- ChevronTexaco Standard tested and passed
- Valve packing emission warranty
- ISO 15848-1 passed CO² at 200°C to the tightness class BH
- ISO 15848-1 passed CO² at 400°C to the tightness class BH

Technical Data

| | |
|----------------------------|---|
| Material | Nickel alloy, wire-reinforced, flexible graphite packing with special blocking agents |
| Available Sizes | 3.2 mm – 25.4 mm (1/8" – 1") |
| Pressure Limit | 345 bar g (5000 psig) |
| Temperature Limit | Max 650°C (1200°F) steam 450°C (850°F) oxidizing atmosphere |
| Chemical Resistance | pH 0 – 14 except in strong oxidizers |

Chesterton® Solutions for Stationary Equipment



1 Tools

For proper installation and removal of stem packing, use **tamping tools, packing cutters, and packing extractors** to minimize errors and equipment damage during valve repacks.



2 Gasketing

Chesterton offers a variety of **joint sealing solutions** where we apply the best available technology to your critical flanged joints, and provide recommendations for your specific applications. **Form-in-place, compression, and semi-metallic gaskets** address most process flanges.




3 Thread Lubrication

Chesterton anti-seize assists in accurate bolt load and resists bolt/nut seizing for easy adjustment and disassembly on flanges, bonnets, and packing followers. These products achieve consistent and correct bolt tensioning.



4 ARC Industrial Coatings

Rebuild, restore, and coat pipe linings, flanges, valve bodies, and discs with **ARC Industrial Coatings** to help resist corrosion and/or abrasion from process media and from the effects of cavitation on valve internals.

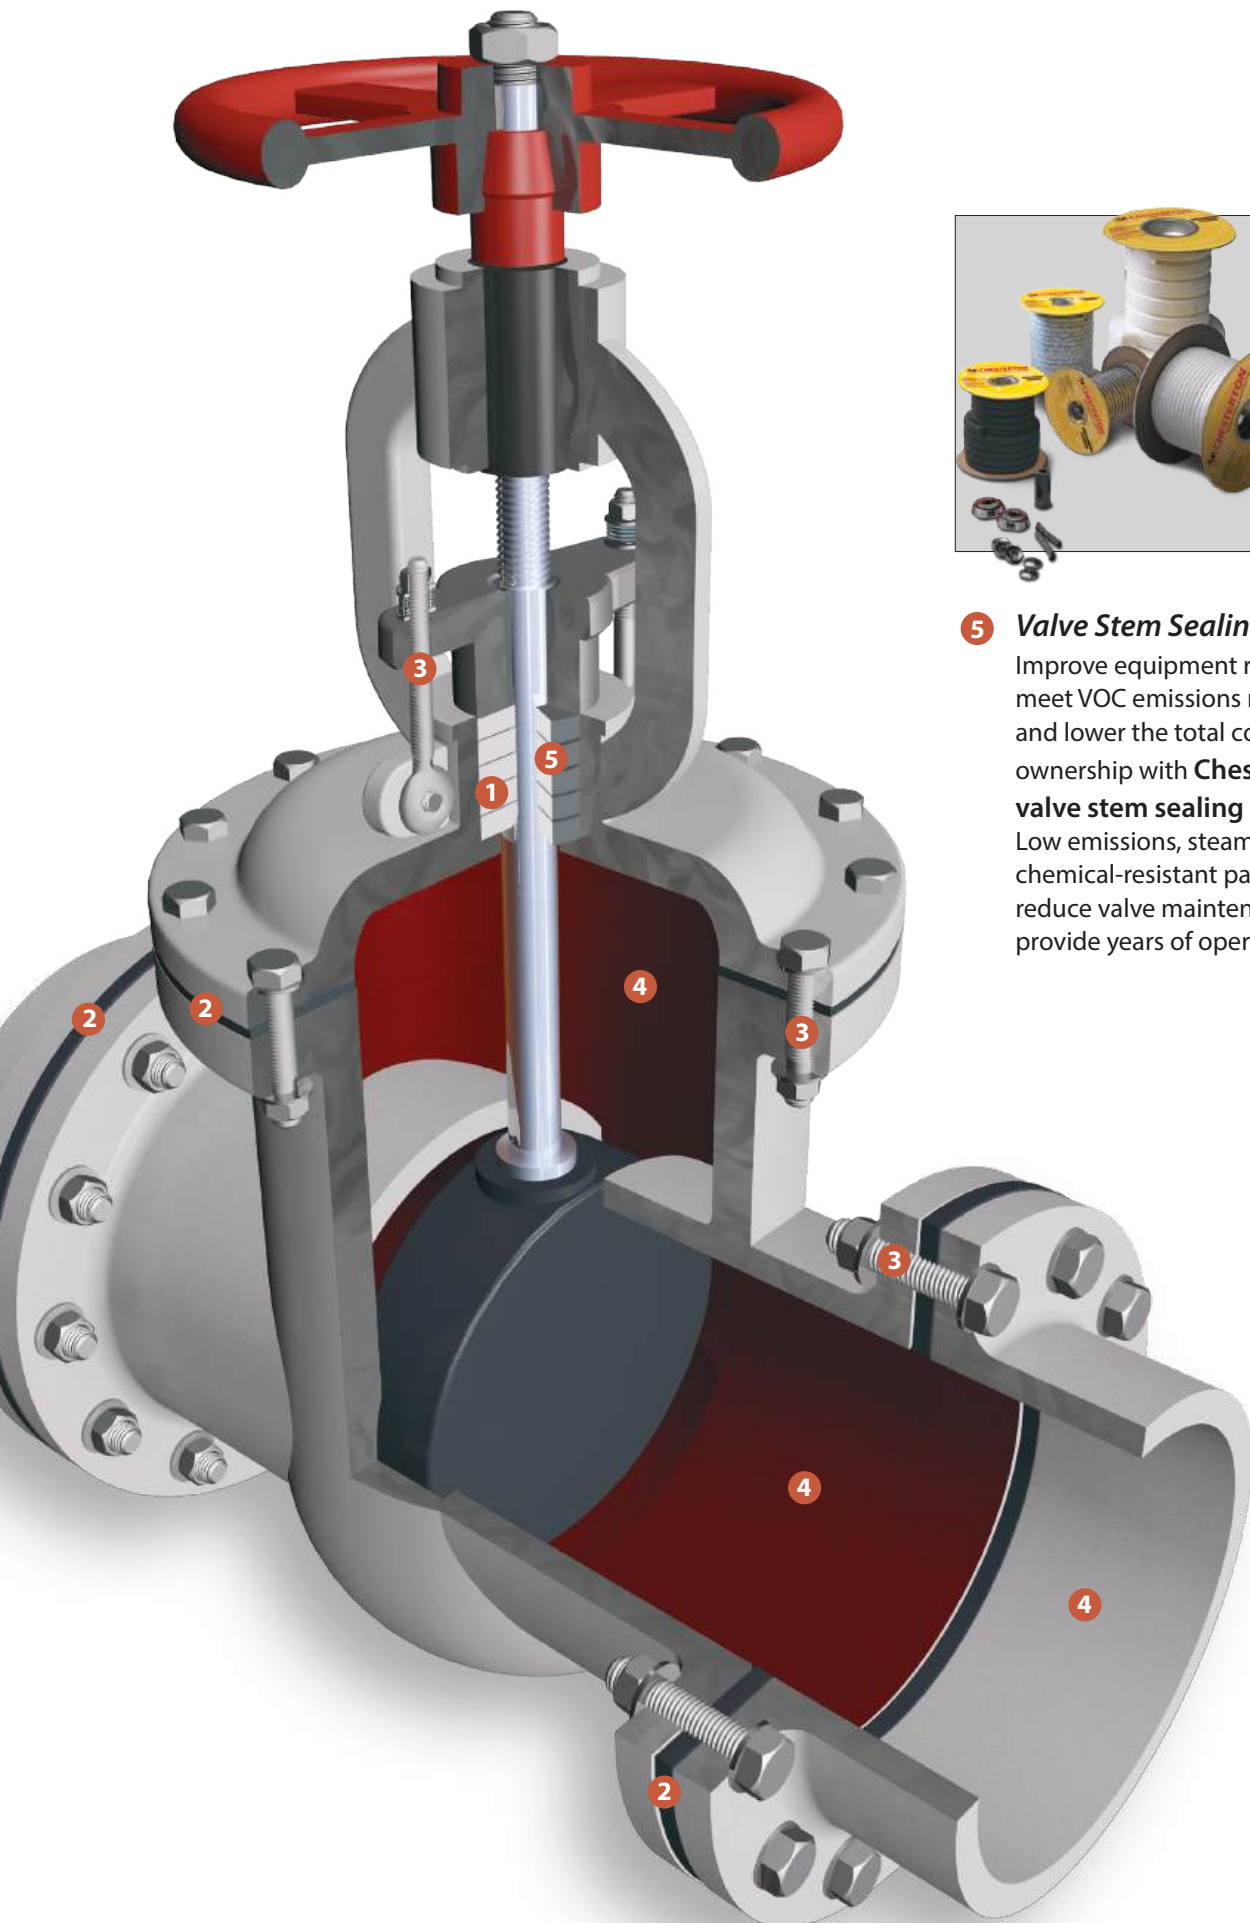

5 **Valve Stem Sealing**

Improve equipment reliability, meet VOC emissions requirements, and lower the total cost of valve ownership with **Chesterton valve stem sealing solutions**. Low emissions, steam, and chemical-resistant packings reduce valve maintenance and provide years of operation.

©2024 A.W. Chesterton Company

VALVE PACKING

1724

High Quality, Interbraided PTFE Valve Packing

Chesterton 1724 is a unique PTFE valve packing material specially treated with protective lubricants that will not harden and deteriorate in a wide range of chemical applications.



| Technical Data | |
|---------------------|---|
| Material | Non-hardening, high grade PTFE yarn with PTFE coating |
| Applications | Block valves, motor operated valves, control valves |
| Available Sizes | 3.2 mm – 25.4 mm (1/8" – 1") |
| Pressure Limit | 206 bar g (3000 psig) |
| Temperature Limit | 260°C (500°F) |
| Chemical Resistance | pH 0 – 14 |

- Non-hardening
- Treated with protective lubricants
- Extrusion resistant
- Excellent chemical resistance

1600

Advanced, Reinforced Exfoliated Graphite Packing

Off the spool nickel alloy wire mesh graphite packing with blocking agents for multi-service performance.



| Technical Data | |
|---------------------|---|
| Material | Nickel alloy wire-reinforced flexible graphite packing |
| Applications | Block valves, as an end ring on control valves, motor operated valves and sootblowers |
| Available Sizes | 3.2 mm – 25.4 mm (1/8" – 1") |
| Pressure Limit | 580 bar g (8400 psig) |
| Temperature Limit | 650°C (1200°F) steam 455°C (850°F) oxidizing environment |
| Chemical Resistance | pH 0 – 14 except in strong oxidizers |

- Extreme high-pressure capability
- Remains flexible in service
- Excellent sealing in many services

VALVE PACKING

1601

Reinforced Graphite Steam Service Packing

A nickel alloy wire mesh graphite packing designed for the power industry for superior leakage control and high performance without PTFE lubrication.

Technical Data

| | |
|----------------------------|--|
| Material | Nickel alloy wire-reinforced, flexible graphite packing |
| Applications | All isolation and steam valves |
| Available Sizes | 3.2 mm – 25.4 mm (1/8" – 1") |
| Pressure Limit | 345 bar g (5000 psig) |
| Temperature Limit | 650°C (1200°F) steam 455°C (850°F) oxidizing environment |
| Chemical Resistance | pH 0 – 14 except in strong oxidizers |



- Proven in high-pressure, high-temperature steam service
- A corrosion inhibitor is applied to deter stem pitting
- PTFE-free

5800

Die-Formed Graphite Wedge Low Friction Sealing Rings

5800 is designed to drastically lower valve stem friction while maintaining excellent sealability in high-temperature applications and requires minimum gland loads.

Technical Data

5800

| | |
|----------------------------|---|
| Material | Die-formed, high-purity graphite |
| Applications | Nuclear and process industry services to seal MOVs, AOVs, and steam services. |
| Pressure Limit | 210 bar g (3000 psig) no end ring, 310 bar g (4500 psig) 1600 end ring* |
| Temperature Limit | 2760°C (5000°F) in non-oxidizing atmospheres, 430°C (800°F) in oxidizing atmospheres |
| Chemical Resistance | pH 0 – 14 |



- Dramatically improves valve stem response
- Excellent chemical and temperature resistance

* When combining 5800 with 1600 end rings the maximum temperature limit is:
650°C (1200°F) for non-oxidizing atmospheres;
430°C (800°F) in oxidizing atmospheres

VALVE PACKING

6800 LowE Packing Set

Control Valve Packing Set That Outperforms ISO 15848 Standard by More Than Three Times

Control and isolation valves are one of the most friction-sensitive applications to seal. These pieces of equipment can become particularly vulnerable to high packing friction, resulting in an overall decrease in system efficiencies and reduced production outputs.

Chesterton’s new control valve packing fits natural gas and oil processing applications.

Chesterton® 6800 LowE Packing Set uses the design of the 5800 series packing, combining graphite’s stability with PTFE’s low friction. It incorporates the unique Chesterton WedgeSeal™ design with a graphite/PTFE hybrid material featuring a thermally stable base of pure graphite tape over-knitted with pure PTFE filament.

The packing set utilizes hybrid braided material against the stem’s dynamic surface where friction is highest. Static sealing components incorporate Chesterton’s pure graphite tape with a passive corrosion inhibitor.

The 6800 LowE Packing Set meets today’s difficult sealing requirements from all state and federal regulations for low VOC and VHAP emissions.



- User-friendly: easy to install, and maintain
- Unique wedge seal design
- No gland adjustments compared to traditional packing sets
- For service temperatures below 316°C (600°F)
- Low gland loads <4,700 psi resulting in low friction
- Passes ISO 15848-1AM-CC3
- API-622 third edition
- API-607

Technical Data

| | |
|----------------------------|---|
| Test Parameters | 125 bar g (1815 psig) in emission service such as VOCs |
| Pressure Limit | 276 bar g (4000 psig) in conventional applications such as steam |
| Temperature Limit | -40°C – 316°C (-40°F – 600°F) |
| Chemical Resistance | pH 0 – 13 except for molten alkali metals, elemental fluorine and strong oxidizers* |
| Size | Consult your local Chesterton representative for a list of available sizes |
| Sample Item | 6800 LowE Packing Set: #435137 without bushing 6800 LowE Packing Set: #435136 with bushing |





Design Elements of the 6800 LowE Packing Set



VALVE LIVE LOADING

Valve Live Loading

Engineered valve sealing solution for improved reliability and ease of maintenance.

| Technical Data | Name | Description |
|--|--|---|
|  | Cartridge Live Loading Assembly (CLL) | The stainless steel outer guide makes packing installation easier and more reliable by using spring deflection as a reference of gland load. The assembly also gives more travel to the packing set, allowing it to handle more thermal cycles without leakage. CLLs provide an easy visual indicator to reapply and maintain proper load to the packing set. |
|  | 5150 Live Loading Assembly | 5150 live loading assemblies in conjunction with applied torque dramatically increase bolt travel due to deflection of the disc springs. The assemblies reduce valve leakage due to thermal cycling and packing wear. |
|  | 5300 | A square graphite precise density sealing ring with a low minimum gland load that creates a seal without large torque valves and friction. 5300 has a corrosion inhibitor to deter stem pitting. |
|  | 5100 Carbon Spacers | 5100/5101 is a 99% carbon spacer that is used to retrofit deep stuffing boxes to reduce the number of rings to 5 in a valve. It is made to highly engineered tolerances to avoid scoring of the valve stem. |



- Automatic gland adjustment for constant pressure
- Zero leakage rates
- Eliminates the need for excessive gland force
- Continually compensating for in-service packing consolidation
- Used in demanding applications in harsh environments
- Safeguards critical applications with reliable technology

GASKET AND FLANGE SEALING

Flange Live Loading

Flange Discs

Increase reliability, lower emissions, and reduce total costs by using tailored sealing solutions for critical flanges.

| Technical Data | 5500 | 5505H |
|-----------------------------|--|---|
| Material | Specialized stainless steel alloy | Chromium steel with black oxide coating |
| Temperature Limit | -200°C – 300°C (-328°F – 575°F) | 0°C – 600°C (32°F – 1100°F) |
| Corrosion Resistance | better | good |
| Applications | Use in combination with Chesterton® Camprofile or Steel Trap™ gaskets on process flanges, heat exchangers, vessels, reactors, valve bonnets, housings, sight glasses | |
| Warranty | 3 year warranty (see flange live loading warranty for conditions) | |



- Significantly reduces downtime on critical equipment
- Lowers emissions and meets environmental regulations
- Reduces leakage and product loss
- Improves plant efficiency and reduces total cost

SHEET GASKETS

457

High-Temperature Carbon Fiber Sheet

Chesterton 457 Carbon Fiber/Nitrile Binder Sheet is a high-temperature sheet gasket material formulated for a wide variety of gasketing needs. 457 is recommended for use in a broad range of steam, water, oil, and hydrocarbon applications.*

Technical Data

| | |
|----------------------------|--|
| Material | Carbon fiber with nitrile binder |
| Applications | A broad range of steam, water, oil, and hydrocarbon applications |
| Available Thickness | 0.4 mm – 3.2 mm (1/64" – 1/8") |
| Temperature Limit | 450°C (840°F) |
| Pressure Limit | 100 bar g (1470 psig) |



- High-temperature capability
- Material formulated for a wide variety of gasketing needs

*This product is not recommended for use in chlorinated hydrocarbons, aromatic, and ester ketones.

459

Graphite Sheet with Nickel Reinforcement

Technical Data

| | |
|----------------------------|---|
| Material | Flexible graphite with a 0.026 mm nickel flat insert |
| Applications | Pipe flanges, vessels, reactors, valve bonnets, housings |
| Available Thickness | 1 mm, 1.6 mm (1/16"), 2 mm, and 3.2 mm (1/8") |
| Sheet Size | 0.8 mm – 2.4 mm (1/32" – 3/32") |
| Temperature Limit | 870°C (1600°F) non-oxidizing, 454°C (850°F) oxidizing, minimum -200°C |
| Pressure Limit | 140 bar g (2000 psig) |
| Chemical Resistance | pH 0 – 14 |



- Easy to cut manually
- Excellent pressure capability
- High-temperature capability
- High chemical resistance

ECS-T

PTFE Sheet Gasket

Filled PTFE sheet with excellent mechanical properties and outstanding chemical resistance.

Technical Data

| | |
|----------------------------|---|
| Material | PTFE with fillers |
| Applications | High pressure and temperature services, especially in chemical and hydrocarbon plants in strong acids |
| Available Thickness | 1 mm, 1.5 mm, 2 mm, and 3 mm |
| Sheet Size | 0.8 mm – 3.2 mm (1/32" – 1/8") |
| Temperature Limit | 260°C (500°F) |
| Pressure Limit | 83 bar g (1200 psig) |
| Chemical Resistance | pH 0 – 14 |



- High chemical resistance
- Excellent in strong acids

SEMI-METALLIC GASKETS

Camprofile

High Performance, Semi-Metallic Gasket*Highly reliable flange gasket with excellent emission control.***Technical Data**

| | |
|-----------------|--|
| Material | Stainless steel carrier with a graphite or PTFE sealing element (more materials available) |
|-----------------|--|

| | |
|---------------------|---|
| Applications | Pipe flanges, heat exchangers, vessels, reactors, valve bonnets, housings |
|---------------------|---|

| | |
|-----------------------|-----------------------|
| Pressure Limit | 300 bar g (4350 psig) |
|-----------------------|-----------------------|

| | |
|--------------------------|---|
| Temperature Limit | graphite sealing layer 550°C (1020°F) inert media -200°C – 900°C (-328°F – 1650°F) PTFE sealing layer 300°C (572°F) |
|--------------------------|---|



- Certified low emission performance
- High reliability
- DIN and ANSI standard gaskets
- Custom shapes available, including heat exchanger gaskets

Spiral Wound

Economical, Semi-Metallic Gasket*Excellent emission performance in an all-around general plant gasket.***Technical Data**

| | |
|-----------------|---|
| Material | Stainless steel windings with graphite or PTFE sealing layer, stainless steel inner ring, coated carbon steel outer ring (more materials available) |
|-----------------|---|

| | |
|---------------------|--|
| Applications | Pipe flanges, vessels, reactors, valve bonnets, and housings |
|---------------------|--|

| | |
|-----------------------|----------------------|
| Pressure Limit | 350 bar g (725 psig) |
|-----------------------|----------------------|

| | |
|--------------------------|--|
| Temperature Limit | graphite sealing layer 450°C (840°F) PTFE sealing layer 300°C (570°F) |
|--------------------------|--|

| | |
|----------------------------|-----------|
| Chemical Resistance | pH 0 – 14 |
|----------------------------|-----------|





- Economical, semi-metallic solution
- Low emissions
- DIN and ANSI standard gaskets and custom shapes available
- Various configurations

Chesterton® Flange Sealing Solutions

1 Metal Gaskets

Chesterton metallic gaskets are used in high-temperature and high-pressure applications. Engineered for extreme performance.

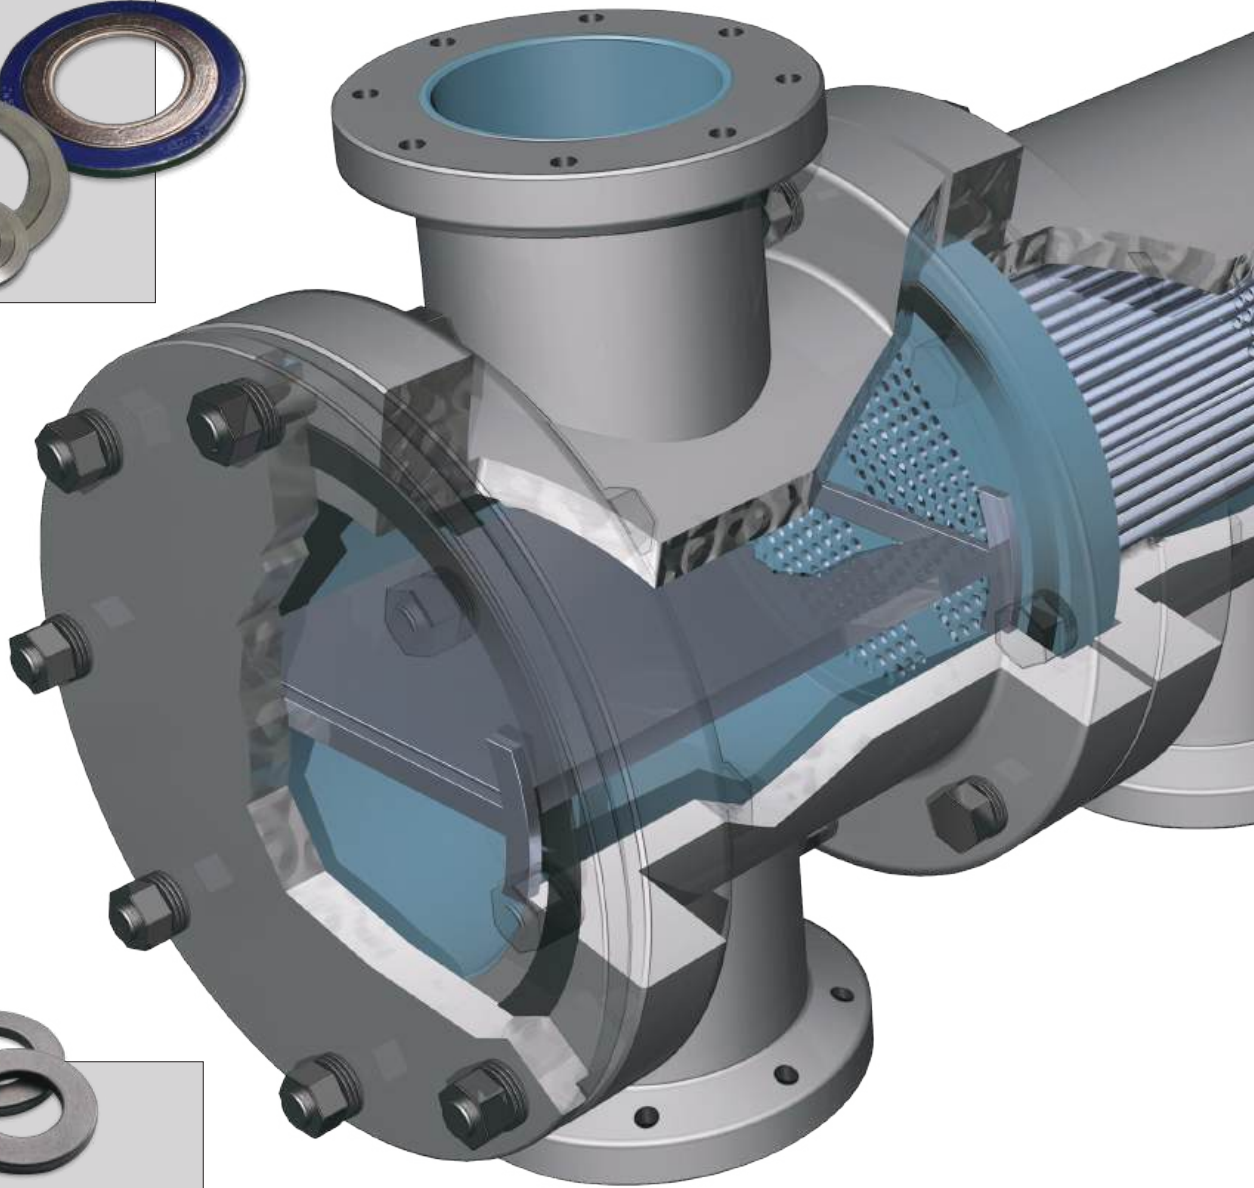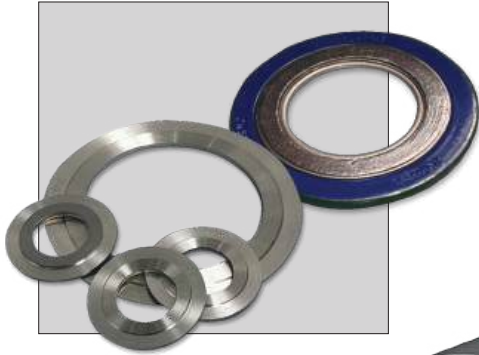


2 Flange Springs

Flange springs are used to address differential thermal expansion issues. They provide added life span to the joint and lower the bolt load decay during thermal cycling.



3 Thread Lubrication

Chesterton anti-seize assists in accurate bolt load and resists bolt/nut seizing for easy adjustment and disassembly on flanges, bonnets, and packing followers. These products achieve consistent and correct bolt tensioning.

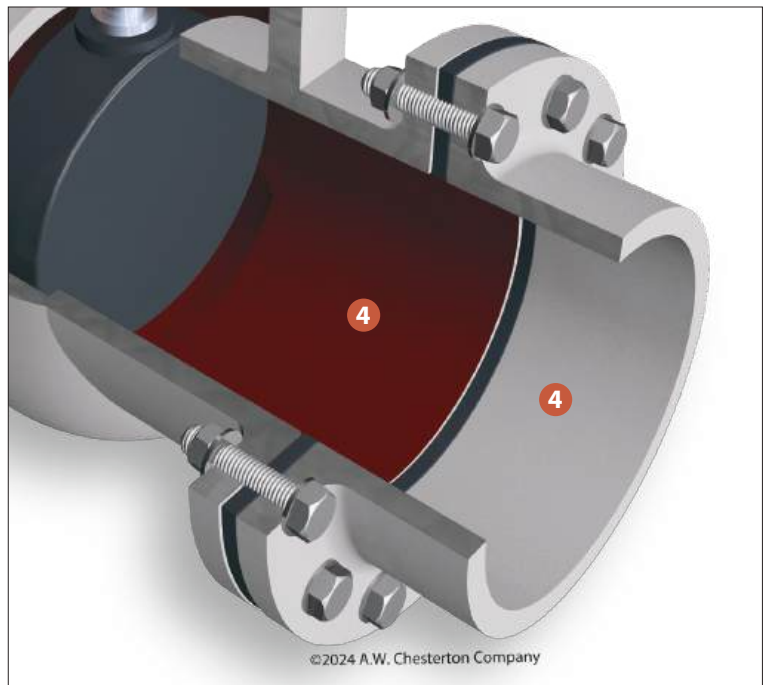


4 ARC Industrial Coatings

Rebuild, restore, and coat pipe linings, flanges, valve bodies, and discs with **ARC Industrial Coatings** that help resist corrosion and/or abrasion from process media and from the effects of cavitation on valve internals.



Seals Selection Guide

Please contact your local Chesterton representative to help you select the best product for your application.

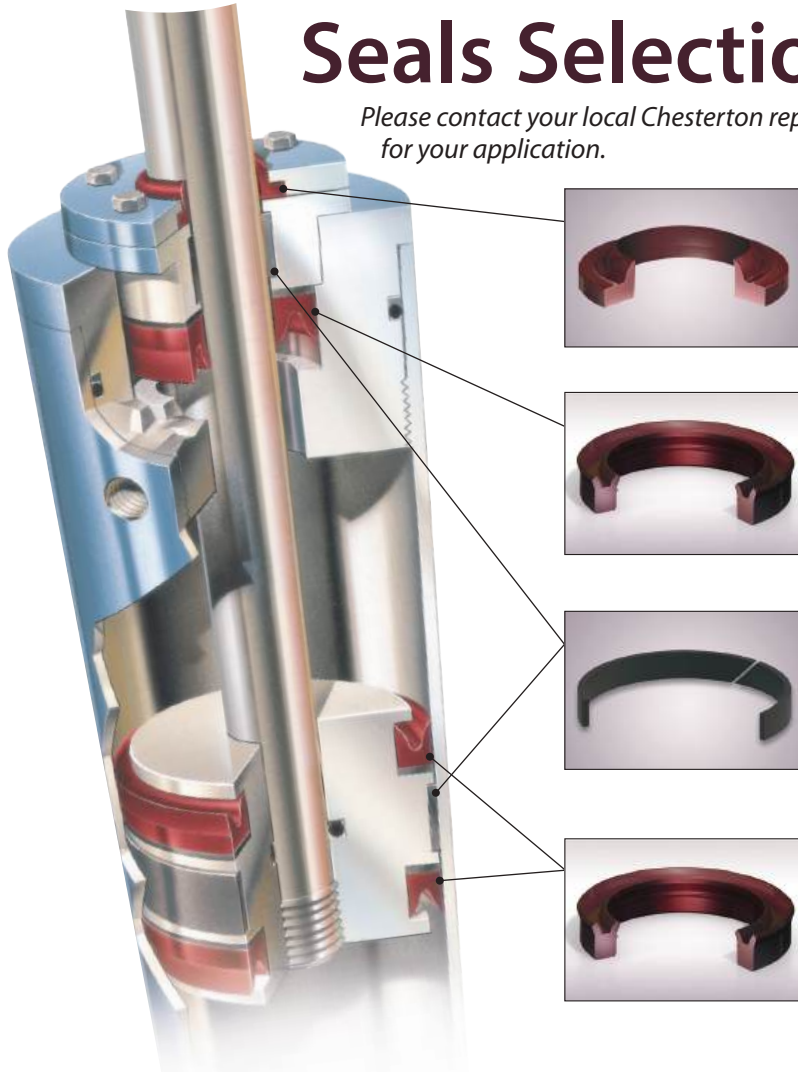

Wiper

The function of a wiper is to effectively clean and to dislodge foreign matter from a reciprocating rod/ram to minimize contaminants from entering the system.



Rod Seal

The function of a rod seal is to act as a pressure barrier and minimize fluid bypass along the dynamic (rod/ram) surface and the static (stuffing box bore) surface under various operating conditions. It regulates the fluid film during extension of the cylinder rod.



Wear Ring

These split, replaceable bearings minimize metal-to-metal contact of moving parts and help prolong equipment and seal life. These bearings reduce radial movement, therefore extending seal life and reducing the risk of reoccurring damage.



Piston Seal

The function of a piston seal is to minimize fluid bypass between the piston head and cylinder bore under various operating conditions and to act as a pressure barrier. It helps to maintain system efficiency and plays an important role in controlling the cylinder motion and maintaining position.









Rotary Sealing Solutions

For most Rotary applications, including, but not limited to, bearing protection on industrial pumps, conveyor belts, and rotary swivel joints, the following profiles should be adequate. For special requirements and profiles, Chesterton has a database of more than 175 profiles to choose from for specific requirements. All rotary seals are made to order.

| Seal Picture | Seal Type | Seal Profile | Product Page | Function | Seal Material Recommended | Split/Continuous | Max Operating Speed m/s (ft/min) | Max Operating Temp. °C (°F) | Max Operating Pressure MPa (psi) | Seal Size Range mm (in) |
|--------------|---------------------------------------|--------------------|--------------|--|--|----------------------------|----------------------------------|-----------------------------|---|-------------------------|
| | High-Speed Continuous Rotary Lip Seal | 30K | 48 | Continuous Lip Seal for bearing protection, reduced shaft wear. | AWC100, AWC300, AWC400, AWC510 | Continuous | 30 (5900) | 200 (400) | 0.07 (10) | 20 – 508 (0.787 – 20) |
| | Split Rotary Seal | 33K | 50 | Split Rotary Seal for ease of installation without the need for equipment disassembly. | AWC100, AWC300, AWC400, AWC510, AWC800 | Split | 12.7 (2500) | 85 (185) | Non-pressure, oil mist lubrication | 25 – 600 (1 – 24) |
| | High-Pressure Slow Rotary Seal | 24K | 50 | Unidirectional Split Rotary Seal for very low speed applications. | AWC800 | Split and Continuous | 0.60 (120) | 85 (185) | 0.7 (100) | 6 – 2540 (1/4 – 100) |
| | Rotary Seal for High Runout | Matrix Rotary Seal | 51 | Split Rotary Seal for large shaft runout and worn shafts. | AWC800/1727NP | Split | 15 (3000) | 85 (185) | Fluid Splash | 50 – 890 (2 – 30) |
| | High-Speed Non-Contact Labyrinth Seal | PLS and SPLS | 49 and 52 | Non-contact Seal for gearboxes, pumps in splash applications. | AWC800 | PLS Continuous, SPSS Split | 30 (6000) | 85 (185) | Non-pressure, non-flooded, oil mist lubrication | 25 – 508 (1 – 20) |
| | Spring Energized Seal | SES 100 | 54 | Unidirectional seal for rotary sealing at low/high pressures for a wide range of temperatures. | AWC300, AWC400, AWC510, AWC520, AWC610, AWC630 | Continuous | 150K PV limit | 200 (400) | 150K PV Limit | 20 – 508 (0.787 – 20) |



Reciprocating Sealing Solutions

For most hydraulic applications, including, but not limited to light-, medium-, and heavy-duty hydraulics used in mining/mobile and underground cylinders, industrial cylinders, injection molding presses, steel mill hydraulic presses, and automotive hydraulics, the following standard profiles will be adequate. For special profiles and requirements, Chesterton offers more than 175 different profiles to pick from per specific application needs.

| Seal Picture | Seal Type | Seal Profile | Configuration | Product Page | Function | Seal Material Recommended | Split/Continuous | Max Operating Speed m/s (ft/min) | Operating Temp. Range °C (°F) | Max Operating Pressure MPa (psi) | Seal Size mm (in) |
|--|-----------------------|--------------|---------------|--------------|--|---------------------------|----------------------|----------------------------------|-------------------------------|----------------------------------|---------------------|
|  | U-Cup | 22K | Piston/Rod | 43 | Piston or Rod Seal to retain hydraulic oil within the cylinder. Significantly minimizes leaks along static/dynamic surfaces. | AWC800 | Continuous and Split | 1 (200) | -50 – 85 (-60 – 185) | 103.5 (15,000) | Up to 2540 (100) |
| | | | | | | AWC860 | Continuous and Split | 1.25 (250) | -50 – 120 (-60 – 250) | | |
|  | Wiper/Scraper | 21K | Rod | 42 | Wiper/Scraper to exclude contaminants, keep abrasives out of the cylinder. | AWC800 | Continuous | 1 (200) | -50 – 85 (-60 – 185) | N/A | Up to 2540 (100) |
| | | | | | | AWC860 | Continuous | 1.25 (250) | -50 – 120 (-60 – 250) | | |
|  | Bearing Elements | 18K / 19K | Piston/Rod | 45 | Split Bearing to minimize metal-to-metal contact, reduce radial movement. | AWC660 | Split | 1.25 (250) | -40 – 121 (-40 – 250) | N/A | Up to 500 (20) |
|  | Cap Seal (Piston/Rod) | CCS | Piston/Rod | 44 | Bidirectional Cap Seal to reduce friction and stick slip effects. | AWC500 | Continuous | 15 (3,000) | -35 – 200 (-30 – 400) | 40 (5800) | Up to 600 (24) |
| | | | | | | AWC860 | Continuous | 1.25 (250) | -35 – 120 (-30 – 250) | | 6 – 1320 (1/4 – 52) |
|  | Stacked Set | 11K | Piston/Rod | 47 | Single-acting, two-piece split, Stacked Set for hydraulic cylinders and presses. No shimming. Reduced friction vs V-Ring sets. | AWC800 AWC825 | Continuous and Split | 1 (200) | -50 – 85 (-60 – 185) | 103.5 (15000) | Up to 2540 (100) |
|  | Stacked Set | 27K | Piston/Rod | 47 | Single-acting V-Ring set for heavy-duty hydraulic applications. | AWC800 | Continuous and Split | 1 (200) | -50 – 85 (-60 – 185) | 103.5 (15000) | Up to 2540 (100) |
| | | | | | | AWC860 | Continuous and Split | 1.25 (250) | -50 – 120 (-60 – 250) | | |

Static Sealing Solutions

For most hydraulic applications, including, but not limited to, light-, medium-, and heavy-duty hydraulics used in mining/mobile and underground cylinders, industrial cylinders, injection molding presses, steel mill hydraulic presses, and automotive hydraulics, the following standard profiles will be adequate. For special profiles and requirements, Chesterton offers more than 175 different profiles to pick from per specific application needs.


| Seal Picture | Seal Type | Seal Profile | Configuration | Product Page | Function | Seal Material Recommended | Split/Continuous | Operating Temp. Range °C (°F) | Max Operating Pressure MPa (psi) | Seal Size mm (in) |
|---|-----------------------------|-----------------------------|-----------------|--------------|---|--|------------------|-------------------------------|----------------------------------|-----------------------|
|  | Static Compression Seal | 20KD | Piston/Rod/Face | 43 | Bidirectional Continuous Compression Seal to replace O-Ring offering better stability and extrusion resistance. | AWC800 | Continuous | -50-85 (-60-185) | 103.5 (15000) | Up to 4000 (157) |
| | | | | | | AWC860 | Continuous | -50-120 (-60-250) | | |
|  | Spring Energized Seal (SES) | SES300 Helical Wound Spring | Rod | 56 | Single-acting with helical spring for static or slow speeds. | AWC300, AWC400, AWC510, AWC520, AWC610, AWC630 | Continuous | -156 – 204 (-250 – 400) | 103.5 (15000) | 20 – 508 (0.787 – 20) |

WIPER SEAL

21K

Wipers for Hydraulic and Pneumatic Applications

High performance protection of hydraulic and pneumatic actuators/systems.



SPECIFICATIONS



| Cap Material | Temperature °C (°F) | Speed m/s (ft/min) |
|--------------|-----------------------|--------------------|
| AWC704 | -30 – 200 (-20 – 400) | 1.00 (200) |
| AWC800 | -50 – 85 (-60 – 185) | 0.90 (185) |
| AWC825 | -40 – 85 (-40 – 185) | 0.50 (100) |
| AWC830 | -35 – 75 (-30 – 165) | 0.90 (185) |
| AWC860 | -50 – 120 (-60 – 250) | 1.25 (250) |

- Positive rake lip design effectively wipes contaminants away from surface
- Minimizes scoring and system contamination
- Abrasion-resistant design withstands demanding environments
- Prolongs lifetime of equipment and components

PRODUCT PROFILES



W21K



W21KF




W21KC

CANNED WIPER SEAL

CW21K

Protect the System from Entering Contaminants

Chesterton positive rake wipers effectively clean and dislodge foreign matter from retracting rods or rams, thus mitigating scoring and system contamination in open cavity designs. These wipers provide excellent performance for hydraulic applications.



SPECIFICATIONS



| Material | Temperature °C (°F) | Speed m/s (ft/min) |
|----------|-----------------------|--------------------|
| AWC704 | -30 – 200 (-20 – 400) | 1.00 (200) |
| AWC800 | -50 – 85 (-60 – 185) | 1.00 (200) |
| AWC825 | -40 – 85 (-40 – 185) | 0.50 (100) |
| AWC830 | -35 – 75 (-30 – 165)) | 0.90 (185) |
| AWC860 | -50 – 120 (-60 – 250) | 1.25 (250) |

- Interference press-fit design does not require support of other external devices
- Space saving and easy, open construction groove
- Single-acting, abrasion-resistant design for hydraulic applications
- Positive rake lip design effectively wipes contaminants away from surface
- Manufacturing process allows flexibility to create any size

*Can made from aluminum, POM, or nylon

PRODUCT PROFILES



CW21K



CW21K1



CW21K2




CW21K3

NEGATIVE LIP U-CUP SEAL

22K

Single-Acting, U-Cup for Rod and Piston Applications in Hydraulics

Flexible family of high performance hydraulic seals for standard and high-pressure applications.



SPECIFICATIONS



| Material | Temperature °C (°F) | Pressure MPa (psi) | Speed m/s (ft/min) |
|----------|-----------------------|--------------------|--------------------|
| AWC704 | -30 – 200 (-20 – 400) | 16.0 (2320) | 1.50 (300) |
| AWC800 | -50 – 85 (-60 – 185) | 103.5 (15000) | 1.00 (200) |
| AWC825 | -40 – 85 (-40 – 185) | 52.0 (7500) | 0.50 (100) |
| AWC830 | -35 – 75 (-30 – 175) | 52.0 (7500) | 0.90 (185) |
| AWC860 | -50 – 120 (-60 – 250) | 103.5 (15000) | 1.25 (250) |

Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES




- Single-acting, U-Cup design, zero leakage throughout the entire operating range
- Abrasion-resistant design, excellent performance in hydraulic applications
- Lip geometry stabilizes seal to prevent twisting and eases installation
- Application-specific solutions, including anti-extrusion ring, energizer, and dynamic/static lip designs

BIDIRECTIONAL COMPRESSION SEAL

20K

Heavy-Duty Bi-Directional Hydraulic Seal

Robust seal design combined with high performance polymer technology for most demanding heavy-duty, high-pressure applications.



SPECIFICATIONS



| Material | Temperature °C (°F) | Pressure MPa (psi) | Speed m/s (ft/min) |
|----------|-----------------------|--------------------|--------------------|
| AWC704 | -30 – 200 (-20 – 400) | 16.0 (2320) | 0.75 (150) |
| AWC800 | -50 – 85 (-60 – 185) | 103.5 (15000) | 0.50 (100) |
| AWC825 | -40 – 85 (-40 – 185) | 52.0 (7500) | 0.25 (50) |
| AWC830 | -35 – 75 (-30 – 165) | 52.0 (7500) | 0.45 (92) |
| AWC860 | -50 – 120 (-60 – 250) | 103.5 (15000) | 0.62 (125) |

Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES




- Ideal replacement for 2-, 3-, or 4-piece cap seal assemblies
- Excellent extrusion resistance
- Abrasion-resistant design withstands demanding environments
- Outstanding resistance to shock loading and pressure spikes

CUSTOM CAP SEAL

CCS (Custom Cap Seal)

Rod and Piston Seals

High performance, dual component system for bidirectional sealing in hydraulic and pneumatic applications.



SPECIFICATIONS

| Cap Material | Temperature °C (°F) | Pressure MPa (psi) | Speed m/s (ft/min) |
|--------------|-----------------------|--------------------|--------------------|
| *AWC800 | -35 – 85 (-30 – 185) | 40 (5800) | 1.00 (200) |
| *AWC860 | -35 – 120 (-30 – 250) | | 1.25 (250) |
| *AWC300 | -35 – 120 (-30 – 250) | | 15.00 (3000) |
| **AWC400 | -35 – 200 (-30 – 400) | | 15.00 (3000) |
| **AWC500 | -35 – 200 (-30 – 400) | | 15.00 (3000) |

*NBR energizer **FKM energizer Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES




- Second generation PTFE and high performance polymers offer improved performance
- Compression seal design increases sealing force with system pressure
- Dramatically reduced friction and eliminated “Stick-Slip” effect
- Excellent chemical- and heat-resistant characteristics

ANTI-EXTRUSION RING

9K

Anti-Extrusion Rings for Hydraulic Applications

Designed to prevent seals from extruding into equipment clearances for heavy-duty, high-pressure applications.



SPECIFICATIONS

| Material | Temperature °C (°F) |
|----------|-----------------------|
| AWC650 | -30 – 90 (-20 – 200) |
| AWC665 | -40 – 105 (-40 – 212) |
| AWC800 | -50 – 85 (-60 – 185) |
| AWC860 | -50 – 120 (-60 – 250) |
| AWC300 | -35 – 175 (-30 – 350) |
| AWC400 | -35 – 175 (-30 – 350) |
| AWC500 | -35 – 175 (-30 – 350) |
| AWC520 | -35 – 175 (-30 – 350) |
| AWC630 | -45 – 175 (-50 – 350) |

PRODUCT PROFILES



9K


- Prevents extrusion of sealing element into equipment clearances: improves MTBR
- Machining process allows the flexibility to create any size
- Available in various profiles and materials
- Split design for ease of installation

BEARING BAND

18K/19K

Bearing Bands for Hydraulic and Pneumatic Applications

High performance replaceable bearing bands for cylinders.



SPECIFICATIONS

| Material | Temperature °C (°F) | Compressive Strength MPa (psi) ASTM D965 | Permissible Compressive Load MPa (psi) | Speed m/sec (ft/min) |
|----------|-----------------------|--|--|----------------------|
| AWC660 | -40 – 121 (-40 – 250) | 158.6 (23000) | 55.0 (7975) | 1.25 (250) |

18K INCH DESIGN


| Cross Section (S) inch | Height (H ₁) inch | Diameter Range (d/D) inch |
|------------------------|-------------------------------|---------------------------|
| 0.125 | 0.375 | 1.0 – 4 |
| | 0.500 | 1.5 – 6 |
| | 0.750 | 3.5 – 8 |
| | 1.000 | 4.0 – 20 |

19K METRIC DESIGN

| Cross Section (S) mm | Height (H ₁) mm | Diameter Range (d/D) mm |
|----------------------|-----------------------------|-------------------------|
| 2.5 | 5 | 20 – 140 |
| | 9 | 55 – 220 |
| | 14 | 70 – 400 |
| | 24 | 315 – 400 |

Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES



- Heat-stabilized nylon—the same carrying load as bronze
- Replaceable bearings prevent metal-to-metal contact and prolong equipment life
- Reduces radial movement, therefore extending seal life
- Split design minimizes downtime

BEARING BAND STRIP

16K/17K

Bearing Band Strips for Hydraulic and Pneumatic Applications

High performance, replaceable bearing strips for heavy-duty hydraulic cylinders and forming machines. The exceptional physical properties and built-in lubricants make it suitable for use on rams or pistons on most of reciprocating applications.



SPECIFICATIONS

| Material | Temperature °C (°F) | Compressive Strength MPa (psi) ASTM D695 | Permissible Compressive Load MPa (psi) | Speed m/sec (ft/min) |
|----------|-----------------------|--|--|----------------------|
| AWC640 | -40 – 121 (-40 – 250) | 345.0 (50000) | 100.0 (14500)* | 1.00 (200) |

*At 20°C (68°F)

16K METRIC DESIGN

| Cross Section (S) mm | Height (L ₂) mm | Diameter Range (d/D) mm |
|----------------------|-----------------------------|-------------------------|
| 2.50 – 4.00 | 9.7 | 300 – 1575 |
| | 15 | 300 – 1575 |
| | 20 | 300 – 1575 |
| | 25 | 300 – 1575 |
| | 30 | 300 – 1575 |

17K INCH DESIGN

| Cross Section (S) inch | Height (L ₂) inch | Diameter Range (d/D) inch |
|------------------------|-------------------------------|---------------------------|
| 0.125 | 0.375 | 12 – 62 |
| | 0.500 | 12 – 62 |
| | 0.625 | 12 – 62 |
| | 0.750 | 12 – 62 |
| | 1.000 | 12 – 62 |
| | 1.500 | 12 – 62 |
| | 2.000 | 12 – 62 |

Applicable standards: ISO 10766

PRODUCT PROFILES





- Prevents metal-to-metal scoring, helps prolong equipment life
- Reduces radial movement, extends seal life
- Built-in lubricant for lower coefficient of friction between mating surfaces
- Split continuous coil accommodates large diameter equipment

CUSTOM WEAR RING

WR


Machined Bearing Bands for Hydraulic and Pneumatic Applications

Custom bearing bands for hydraulic and pneumatic applications machined to equipment groove size.

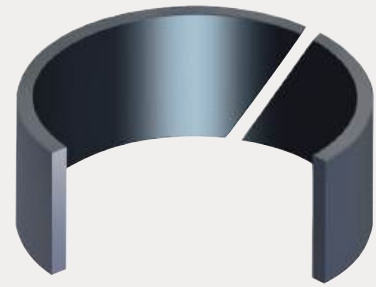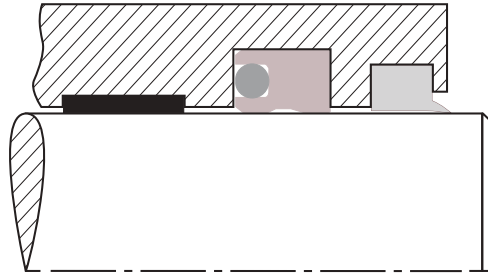

- Replaceable bearings; a cost-effective method for improving equipment performance
- Reduces radial movement, prevents metal-to-metal contact while extending seal life
- Custom wear rings eliminate unnecessary modifications
- Machining process allows the flexibility to create any size

SPECIFICATIONS



| Material (designation) | Temperature °C (°F) | Compressive Strength MPa (psi) ASTM/ISO Testing | Permissible Compressive Load MPa (psi) | Speed m/sec (ft/min) |
|------------------------|-----------------------|---|--|----------------------|
| AWC650 | -30 – 90 (-20 – 200) | 55.2 (8000) | 20.0 (2900) | 3.00 (600) |
| AWC663 | -40 – 105 (-40 – 212) | 90.0 (13050) | 30.0 (4500) | 3.00 (600) |
| AWC665 | -40 – 105 (-40 – 212) | 96.7 (14000) | 30.0 (4500) | 3.00 (600) |
| AWC300 | -35 – 120 (-30 – 250) | 10.6 (1540) | 3.5 (510) | 5.00 (1000) |
| AWC400 | -35 – 120 (-30 – 250) | 8.5 (1230) | 2.5 (365) | 5.00 (1000) |
| AWC500 | -35 – 120 (-30 – 250) | 10.1 (1540) | 4.5 (652) | 5.00 (1000) |
| AWC520 | -35 – 120 (-30 – 250) | 7.9 (1145) | 2.5 (365) | 5.00 (1000) |
| AWC630 | -45 – 175 (-50 – 350) | 138.1 (20000) | – | 1.00 (200) |
| AWC635 | -45 – 175 (-50 – 350) | 179.5 (26000) | – | 1.00 (200) |

PRODUCT PROFILES




V-RING STACKED SET

27K

Split, Stacked Set for Hydraulic Rod Applications

Advanced stacked set technology for high-speed hydraulic applications and for scored, mechanically damaged rod and ram surfaces.



SPECIFICATIONS



| Material (designation) | Temperature °C (°F) | Pressure MPa (psi) | Speed m/s (ft/min) |
|------------------------|-----------------------|--------------------|--------------------|
| AWC704 | -30 – 200 (-20 – 400) | 16.0 (2320) | 1.50 (300) |
| AWC800 | -50 – 85 (-60 – 185) | 103.5 (15000) | 1.00 (200) |
| AWC825 | -40 – 85 (-40 – 185) | 52.0 (7500) | 0.50 (100) |
| AWC830 | -35 – 75 (-30 – 165) | 52.0 (7500) | 0.90 (185) |
| AWC860 | -50 – 120 (-60 – 250) | 103.5 (15000) | 1.25 (250) |

Please contact your Chesterton representative for larger sizes.

- Split components for ease of installation
- Light gland offers greater speed capability than conventional sets
- Pressure sensitive lip design minimizes friction and extends service life
- Material combinations designed for use in both new and worn equipment

PRODUCT PROFILES





For large diameters with exceptionally deep stuffing boxes, the 27K Heavy-Duty (HD) seal profile is available as a customer order.

TWO-PIECE SPLIT STACKED SET

11K

Split, Dual-Component Hydraulic Rod Seal

Adaptive solution for heavy-duty hydraulic cylinder. Eliminates the equipment disassembly during seal installation, wand provides sealing on worn, scored surfaces.




SPECIFICATIONS



| Material | Temperature °C (°F) | Pressure MPa (psi) | Speed m/s (ft/min) |
|------------|-----------------------|--------------------|--------------------|
| AWC704/704 | -30 – 200 (-20 – 400) | 16.0 (2320) | 1.5 (300) |
| AWC800/800 | -50 – 85 (-60 – 185) | 103.5 (15000) | 1.00 (200) |
| AWC800/825 | -40 – 85 (-40 – 185) | 52.0 (7500) | 0.5 (100) |
| AWC830/830 | -35 – 75 (-30 – 165) | 52.0 (7500) | 0.9 (185) |
| AWC860/860 | -50 – 120 (-60 – 250) | 103.5 (15000) | 1.25 (250) |

Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES:



- Replaces the stacked set assembly
- Split design eliminates the need to disassemble equipment
- One optimized seal concept for different press applications
- Dual material combination works in both new and worn equipment
- Design eliminates shimming and future adjustments
- Fusion program
- Helps reduce energy consumption

CONTINUOUS PTFE LIP SEAL

30K

Advanced Lip Seal

Bearing and Gearbox Protection

Advanced sealing protection technology keeps the lubricant in and the dirt out for long-term sealing.

Chesterton 30K lip seals are high performance lip seals that are ideal for dynamic rotary seal applications. These seals block penetration of external contaminants from entering the housing and provide excellent service in bearing and gearbox applications that utilize conventional oil lip seals.

The 30K is manufactured individually, using our unique machining process, which eliminates the need for tooling costs associated with new sizes. The 30K is offered in other unique designs based on your application requirements—whether a built-in wiper is required or space limited.

The unique 30K lip seal design is mechanically formed to provide optimal sealing force and is available in four distinct PTFE materials developed specifically for sealing applications. The PTFE compounds, coupled with the seal design, provide excellent fluid compatibility and outstanding performance.



- New designs and materials to outperform conventional lip seals
- High performance PTFE compounds offer advanced wear and abrasion resistance
- Unique design provides lower friction and decreased shaft wear
- High performance lip seals block contaminants from entering housing



SPECIFICATIONS



| Material Adapters/Sealer Rings | Size Range mm (inch) | Temperature °C (°F) | Speed m/s (ft/min) | Pressure MPa (psi) | Surface Finish μm (μ inch) | Recommended Use | Mating Surface (Rockwell C) |
|--------------------------------|--------------------------|--------------------------|--------------------|--------------------|--|--|-----------------------------|
| AWC100 | 20 – 508 (0.787 – 20) | -30 – 200 (-20 – 400) | Up to 30 (5900) | 0.07 (10) | Dynamic 0.2 – 0.4 (8 – 16) | Excellent dry Excellent low viscosity No water and steam | ≥45 |
| AWC300 | | | | | | Excellent high viscosity Good dry and good in water | ≥55 |
| AWC400 | | | | | Static 0.4 – 0.8 (16 – 32) | Excellent in water Good dry and low viscosity | ≥55 |
| AWC510 | | | | | Excellent dry Good in water and steam No petroleum liquids | ≥45 | |

Applicable standard: ISO 6194-1

PRODUCT PROFILES




*Metal band reinforced for additional stability

CARTRIDGE MULTI LIP SEAL

30KC

Cartridge Design for Sealing Powders and Viscous Fluids

Chesterton 30KC polymer cartridge seals are designed for use in dynamic rotary seal applications. This cartridge design uses high performance, filled PTFE materials proven to withstand the high shear rates, frictional heat, and abrasives common when pumping high viscosity products and powders.



SPECIFICATIONS

| Material* | Temperature °C (°F) | Speed m/s (ft/min) | Pressure MPa (psi) | Mating Surface (Rockwell C) | Surface Finish μm (μ inch) | Recommended use |
|-----------|-----------------------|--------------------|--------------------|-----------------------------|--|--|
| AWC100 | -30 – 200 (-20 – 400) | Up to 5.0 (984) | Up to 1.0 (150) | 45 | Dynamic 0.2 – 0.4 (8 – 16) Static 0.4 – 0.8 (16 – 32) | Excellent dry Excellent low viscosity (<2,000cp) Powders, oil, resins, glues, paints No water or steam |
| AWC300 | | | | 55 | | Excellent high viscosity (>2,000cp) Good dry, water or steam |
| AWC400 | | | | 55 | | Excellent in water or steam Good dry and low viscosity powders, asphalt, clay, slurries |
| AWC510 | | | | 45 | | Excellent dry Good in water or steam chocolate and syrups No petroleum liquids |

*Fluoroelastomer O-Rings provided (FDA listed w/AWC510) **Run-out to 0,15mm (.005") Applicable standards: ISO 3069

PRODUCT PROFILES



30KC




- Outperforms conventional packing, sealing viscosity fluids, and dry powders
- Decreases downtime, easy-to-install, versatile cartridge design
- Improves performance of compression packing, distinct PTFE materials
- Custom-designed cartridges made to equipment dimensions

Polymer Labyrinth Seal (PLS)

Unitized, Non-Contacting Seal for Bearing Protection

Made from Chesterton's proprietary polymer material technology, the Chesterton patented Polymer Labyrinth Seal (PLS) is a non-contact bearing seal which protects pumps, motors, gearboxes, and other rotating equipment in splash applications.



SPECIFICATIONS

| Material | Temperature °C (°F) | Speed* m/s (ft/min) | Eccentricity mm (inch) |
|----------|-----------------------|---------------------|------------------------|
| AWC800 | -50 – 85 (-60 - 185) | 30.50 (6000) | 0.75 (0.030) |
| AWC860 | -50 – 120 (-60 – 250) | 30.50 (6000) | 0.75 (0.030) |

*Contact engineering for speed beyond these limits.

PRODUCT PROFILES



PLS1

PLS2




- High performance, non-contact design eliminates fretting caused by lip seals
- Keeps lubrication in and seals out external contamination
- Unitized design and durable, non-sparking material provide easy, reliable installation
- Available in a variety of configurations to meet plant-wide equipment needs
- IP56 (third party certification) designed to be resistant to dust and water

SLOW ROTARY SEAL

24K

Design for Slow Rotating Applications Exposed to Large Shaft Runout

Chesterton 24K Rotary Split Seals, with their robust design, are ideal for low-speed dynamic rotary seal applications exposed to large shaft runout. These seals provide excellent sealing and protective solutions for heavy-duty rotating equipment, even in severe application conditions, thus prolonging bearing and equipment service life.



SPECIFICATIONS

| Material | Temperature °C (°F) | Pressure MPa (psi) | Speed m/s (ft/min) |
|----------|-----------------------|--------------------|--------------------|
| AWC704 | -30 – 200 (-20 – 400) | 0.7 (100) | 0.9 (180) |
| AWC 800 | -50 – 85 (-60 – 185) | 0.7 (100) | 0.60 (120) |
| AWC825 | -40 – 85 (-40 – 185) | 0.7 (100) | 0.30 (60) |
| AWC830 | -35 – 75 (-30 – 165) | 0.7 (100) | 0.50 (110) |
| AWC860 | -50 – 120 (-60 – 250) | 0.7 (100) | 0.75 (150) |



- Flexible dynamic lip design for large shaft runout compensation
- Split configuration simplifies installation
- Positive rake lip design wipes contaminants away from the mating surface
- Robust static lip design allows stack set arrangement and provides stability
- Excellent abrasion-resistance; withstands demanding environments
- Manufacturing process allows flexibility to create any size

PRODUCT PROFILES




24K

LOW-PRESSURE ROTARY SEAL

33K

Split Seal for Bearing and Gearbox Protection

This innovative, split seal technology minimizes penetration of external contaminants entering the housing, and provides excellent service in bearing and gearbox applications.



SPECIFICATIONS

| Material Adapters/ Sealer Rings | Temperature °C (°F) | Speed m/s (ft/min) | Pressure bar (psi) | Recommended Use | Mating Surface (Rockwell C) |
|---------------------------------|---------------------|--------------------|------------------------------------|---|-----------------------------|
| AWC800 Adapters | | | | | |
| AWC100 | 85 (185) | 12.70 (2500) | Non-pressure, oil mist lubrication | Excellent dry. Excellent low viscosity. | ≥45 |
| AWC300 | 85 (185) | 12.70 (2500) | Non-pressure, oil mist lubrication | Excellent high viscosity. Good dry and good in water. | ≥55 |
| AWC400 | 85 (185) | 12.70 (2500) | Non-pressure, oil mist lubrication | Excellent in water. Good dry and low viscosity. | ≥55 |
| AWC860 Adapters | | | | | |
| AWC100 | 121 (250) | 12.70 (2500) | Non-pressure, oil mist lubrication | Excellent dry. Excellent low viscosity. No water and steam. | ≥45 |
| AWC300 | 121 (250) | 12.70 (2500) | Non-pressure, oil mist lubrication | Excellent high viscosity. Good dry and good in water. | ≥55 |
| AWC400 | 121 (250) | 12.70 (2500) | Non-pressure, oil mist lubrication | Excellent in water. Good dry and low viscosity. | ≥55 |

Applicable standard: ISO 6194-1

PRODUCT PROFILES



33K

- Split design eliminates the need for equipment disassembly
- New design and materials proven to outperform conventional lip seals
- Patented design combines high performance PTFE and polymer materials
- Filled PTFE materials provide high wear and abrasion resistance

LOW-PRESSURE ROTARY SEAL

Matrix Seal

Easy-to-Install, Patented, Split Rotary Seal for Worn Shaft Applications

The Chesterton patented Matrix Rotary Seal is a split-bearing seal developed to work on worn equipment and large runout shafts. This unique seal protects pumps, gearboxes, and other rotating equipment.

The innovative split design minimizes equipment disassembly, and downtime to help ensure optimal continuous operation of critical equipment.

This product is a robust, maintenance-friendly, easy-to-install solution to address equipment with:

- Worn Shafts/Sleeves
- High Vibration
- Large Runout
- Blind Installations

Targeted applications: Pumps, gearboxes, conveyors, motors, and fans


SPECIFICATIONS



| Seal Housing | Sealing Element | Temp °C (°F) | Speed m/s (ft min) | Pressure bar (psi) | Eccentricity mm (Inch) | Chemical Resistance |
|--------------|-----------------|--------------|--------------------|--------------------|------------------------|--|
| AWC800 | 1727NP | 85 (185) | 15.00 (3000) | Fluid Splash | up to 1.5 (0.060) | Compatible with all commonly used bearing and gearbox oils and greases |
| AWC860 | 1727NP | 120 (250) | 15.00 (3000) | Fluid Splash | up to 1.5 (0.060) | |

Matrix Split Seal Design and Function

The innovative unitized design combines Chesterton’s leading polyurethane and impregnated synthetic fiber packing technology to maximize seal performance and reliability.


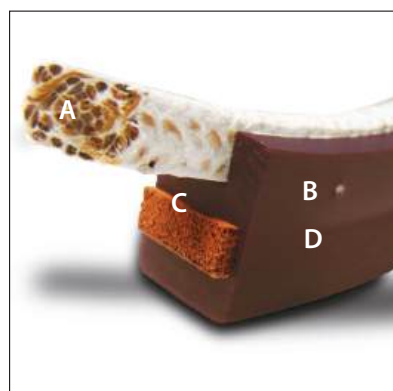


- A. Compression Packing** – Impregnated synthetic fiber creates a seal against rotating shaft
- B. Nylon Pin** – Minimizes rotation of compression packing
- C. Energizer** – Closed cell foam energizes compression packing against the shaft to help create a seal
- D. Polymer Housing** – Durable, flexible material unitizes the seal assembly and energizes the sealing element

PRODUCT PROFILES



MATRIX

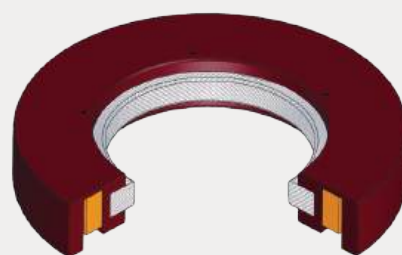


- Engineered for large runout and worn equipment
- Minimizes cumbersome equipment teardown and downtime
- Excludes external contamination, preserves internal lubrication
- Flexible design provides ease of installation
- Manufactured to custom equipment dimensions and requirements
- Suitable for various industries, including steel, mining, paper, and agricultural

ROTARY SEALS - STUFFING BOX SOLUTIONS

SPLS (Split Polymer Labyrinth Seal)

Non-Contact Split Rotary Seal for Bearing Protection

This SPLS uses Chesterton's exclusive, industry-leading thermoset polymer to create a non-contact, three-piece seal design that includes a rotor with an integrated valve, a stator, and a metal clamp with no wearing parts.



SPECIFICATIONS

| Material (designation) | Temperature °C (°F) | Speed m/s (ft/min)* | Eccentricity mm (inch) |
|------------------------|-------------------------|---------------------|------------------------|
| AWC800 | -50 – 85 (-60 – 185) | 30.50 (6000) | 0.75 (0.030) |

*Contact engineering for speeds beyond these limits.

PRODUCT PROFILE



SPLS


- A split, non-contact design that reduces installation time and minimizes downtime for critical equipment
- Reduces the chances of fretting caused by lip seals
- Keeps lubrication in and seals out external contamination
- Unitized design and durable material provide easy, reliable installation
- Available in a variety of configurations to meet plant-wide equipment needs
- Standard sizes available for popular equipment; custom sizes available upon request
- IP65 protection against water jets and dust

RESTRICTION BUSHINGS

14K

Robust, Restriction Bushing for Rotary Equipment

Chesterton 14K reduces the number of packing rings required in the stuffing box, which helps to decrease frictional force. This restriction bushing also helps keep the lantern ring in its position and maintain the optimum flush rate. The 14K is manufactured from superior abrasion-resistant polymers, and the PTFE compound offers broad media compatibility with high-temperature capability.

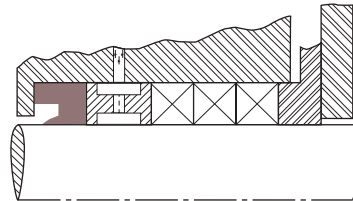

SPECIFICATIONS

| Material (designation) | Temperature °C (°F) | pH |
|------------------------|---------------------|--------|
| AWC510 | Up to 200 (400) | 0 – 14 |
| AWC520 | Up to 200 (400) | 0 – 14 |
| AWC800 | Up to 85 (185) | 4 – 10 |

Applicable standard: ISO3069

PRODUCT PROFILES



R14K

R14KRBS

R14KPF


- Split design simplifies installation
- Minimizes particles from entering the stuffing box, extending packing and seal life
- Tapered lip design controls fluid bypass
- Designed for pumps and other rotating equipment such as agitators, mixers, and refiners

STATIC COMPRESSION SEAL

20KD

High Performance O-Ring Upgrade for Static Sealing

The Chesterton 20K D-Ring is a continuous compression seal designed for use in static applications, and is often applied as an upgrade to conventional face seals or O-Rings. The 20KD design provides excellent performance in static applications in hydraulic or pneumatic equipment including flange and valve control units.



- Upgrade performance from conventional face seal and O-Ring designs
- Superior wear and extrusion resistance versus conventional materials
- Low compression set characteristics
- Unique manufacturing process allows the flexibility to create any size*
- Sizes made to accommodate international standards including ISO and DIN

SPECIFICATIONS

| Material (designation) | Size Range* mm (inch) | Temperature °C (°F) | Pressure MPa (psi) |
|------------------------|-----------------------|-----------------------|--------------------|
| AWC704 | 6 – 304.8 (1/4 – 12) | -30 – 200 (-20 – 400) | 16.5 (2320) |
| AWC800 | 6 – 2540 (1/4 – 100) | -50 – 85 (-60 – 185) | 103.5 (15000) |
| AWC825 | 6 – 2540 (1/4 – 100) | -35 – 75 (-30 – 165) | 52.0 (7500) |
| AWC830 | 6 – 254 (1/4 – 10) | -35 – 75 (-30 – 165) | 52.0 (7500) |
| AWC860 | 6 – 508.0 (1/4 – 20) | -50 – 120 (-60 – 250) | 103.5 (15000) |

Please contact your Chesterton representative for larger sizes. Applicable standard: ISO 3601-2

PRODUCT PROFILE




FACE AND STATIC SEAL

OR

O-Ring for Static Sealing

Chesterton offers O-Rings for static applications in several materials including FKM, FEPM, NBR, and Polyurethanes. The OR1 designation represents machined O-Rings made from our industry-leading thermoset polyurethanes, which offer excellent extrusion resistance. The OR designation refers to all other commonly used materials.




- Polyurethane O-Rings offer superior wear extrusion and resistance versus conventional materials
- Low compression set characteristics
- Unique manufacturing process allows the flexibility to create any size*
- Sizes made to accommodate international standards including ISO and DIN

SPECIFICATIONS

| Material (designation) | Temperature °C (°F) |
|------------------------|-----------------------|
| AWC704 | -30 – 200 (-20 – 400) |
| AWC800 | -50 – 85 (-60 – 185) |
| AWC825 | -40 – 85 (-40 – 185) |
| AWC830 | -35 – 75 (-30 – 165) |
| AWC860 | -50 – 120 (-60 – 250) |

*Please contact Applications Engineering for pressure ratings and extrusion gap recommendations

PRODUCT PROFILES



CANTILEVER SPRING DESIGN

SES100

Cantilever Spring Energized Seals, Highly Dynamic Applications

Cantilever Spring Energized Seals (SES) are primarily used in highly dynamic applications for rotary and reciprocating equipment, but they can also be used in static applications, when higher deflection springs are needed. The improved spring and seal deflection capability can be required due to excessive expansion or contraction or wide hardware tolerance.


The SES100 incorporates a U-shaped seal jacket with a high performance, stainless steel V-shaped cantilever spring to apply positive sealing force to the mating surface.

This design utilizes an asymmetric seal profile, where the dynamic lip has a robust profile in combination with a front angle, providing excellent leakage control and good scraping effect in case of highly viscous medias. The V-shaped cantilever spring design provides the spring tension at the leading edge of the seal only, which helps to optimize lip load and minimize frictional force.

Seal jackets are made from high performance fluoroplastic compounds and engineered plastics that provide, low coefficient of friction, high abrasion resistance, dimensional stability, and outstanding resistance to most fluids, chemicals, and gases.

This is the most popular spring energized seal design series due to its unique attributes, which help to maximize seal and hardware life.

The SES100 is available in different unique jacket materials to address a broad range of applications.

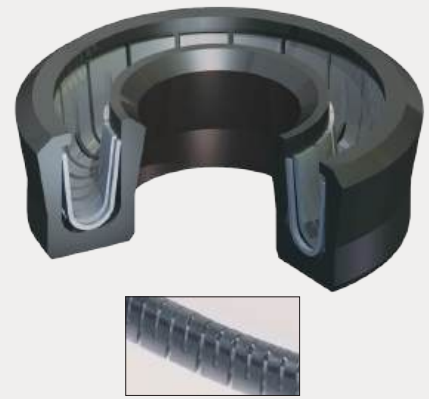

- Highly dynamic and static applications; plant-wide usage
- Unidirectional designs; available as rod, piston, flange, or static seals
- Single-point profile yields high sealability while minimizing frictional force
- All seals are made-to-order; no equipment modifications required
- Custom designs and materials available upon request

SPECIFICATIONS



| Material (designation) | Temperature °C (°F) |
|------------------------|-------------------------|
| AWC300 | -156 – 200 (-250 – 400) |
| AWC400 | -156 – 204 (-250 – 400) |
| AWC510 | -156 – 204 (-250 – 400) |
| AWC520 | -268 – 204 (-450 – 400) |
| AWC610 | -200 – 82 (-325 – 180) |
| AWC630 | -73 – 204 (-100 – 400) |

PRODUCT PROFILES



ELLIPTICAL COIL SPRING DESIGN

SES200

Elliptical Coil Spring Energized Seals with Constant Lip Load

Elliptical Coil Spring Energized Seals (SES) are commonly used in rotary, reciprocating, and static applications, where constant lip load or constant friction for low-pressure applications is needed. The elliptical coil spring provides an almost constant load on seal lips independent of hardware tolerances, eccentricity, and seal wear.

The SES200 incorporates a U-shaped seal jacket with a high performance, stainless steel elliptical coil spring with high spring loading, which provides excellent sealing at zero or low system pressure, even in the case of fluid and gas applications.

Seal jackets are made from high performance fluoroplastic compounds and engineered plastics that provide a low coefficient of friction, high abrasion resistance, dimensional stability, and outstanding resistance to most fluids, chemicals, and gases as well as a resistance to aging.

The SES200 is available in unique jacket materials to address a broad range of applications. Each seal jacket is used in combination with a high performance, stainless steel elliptical coil spring to apply positive sealing force to the mating surface.




- Unidirectional design accommodates excessive tolerances or misalignment
- Elliptical coil spring design; high load vs. deflection
- Miniature profiles accommodate small diameters
- All seals are made-to-order; no equipment modifications required
- Custom designs and materials available upon request

SPECIFICATIONS



| Material (designation) | Temperature °C (°F) |
|------------------------|-------------------------|
| AWC300 | -156 – 200 (-250 – 400) |
| AWC400 | -156 – 204 (-250 – 400) |
| AWC510 | -156 – 204 (-250 – 400) |
| AWC520 | -268 – 204 (-450 – 400) |
| AWC610 | -200 – 82 (-325 – 180) |
| AWC630 | -73 – 204 (-100 – 400) |

PRODUCT PROFILES




HELICAL WOUND SPRING DESIGN

SES300

Helical Wound Design for Slow Speed and Static Applications

This custom seal has excellent loading capabilities with minimal deflection, making it ideal for use in static applications, slow speeds, extremely low temperatures, and/or infrequent dynamic conditions when friction and wear are secondary concerns.



SPECIFICATIONS



| Material (designation) | Temperature °C (°F) |
|------------------------|-------------------------|
| AWC300 | -156 – 200 (-250 – 400) |
| AWC400 | -156 – 204 (-250 – 400) |
| AWC510 | -156 – 204 (-250 – 400) |
| AWC520 | -268 – 204 (-450 – 400) |
| AWC610 | -200 – 82 (-325 – 180) |
| AWC630 | -73 – 204 (-100 – 400) |

Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES





- Unidirectional design for slow speed and static applications
- Helical wound spring design with high-load, minimal deflection
- Concentrated load design when friction and wear are secondary concerns
- All seals made to order; no equipment modifications required
- Custom designs and materials available upon request

STACKED V-RING SEAL

SES500

High Performance, Multi-Purpose V-Rings

These stacked V-Ring sets are specifically designed to accommodate hardware with deep stuffing boxes. They are used in both rotary and reciprocating applications and are available in solid and split designs, depending upon your application requirements.



SPECIFICATIONS



| Material (designation) | Temperature °C (°F) |
|------------------------|-------------------------|
| AWC300 | -156 – 200 (-250 – 400) |
| AWC400 | -156 – 204 (-250 – 400) |
| AWC510 | -156 – 204 (-250 – 400) |
| AWC520 | -268 – 204 (-450 – 400) |
| AWC610 | -200 – 82 (-325 – 180) |
| AWC630 | -73 – 204 (-100 – 400) |

PRODUCT PROFILES



- Unidirectional design accommodates hardware with deep stuffing boxes
- Multi-purpose stacked sets available in solid and split designs
- All seals made to order; no equipment modifications required
- Custom designs and materials available upon request

CONTINUOUS CONTACT SEAL

SES600

Continuous Contact Seals

Heavy-duty, High Load Seals

Continuous contact, robust Spring Energized Seals (SES) are primarily used where very high axial loading is required for challenging static and slow rotary, oscillating applications. This design is best utilized in difficult static sealing applications such as gas, cryogenic temperatures, and vacuum. This spring design can also be used in dynamic applications where high torque and clamping forces are present. The geometry of this spring lends itself to larger cross section and diameters.


The continuous spring is a U-shaped spring manufactured with independent grooves originating in the center of the ring and progressing to the outside diameter. This unique spring design produces a continuous, heavy load at the sealing points. The continuous geometry of the spring, when wound in a circumference, minimizes expansion and contraction due to thermal effects.

The SES600 is available in multiple unique jacket materials to address a broad range of applications. Each seal jacket is used in combination with a high performance, metallic, continuous spring to produce the required high contact load for the positive sealing force against the mating surface.

The materials used for the SES600 consist of high performance fluoroplastic compounds and engineered plastics that provide a low coefficient of friction, high abrasion resistance, and dimensional stability, as well as outstanding resistance to most fluids, chemicals, and gases.



- Continuous contact, robust spring design for tight sealing
- Sealing solution for challenging static and rotary applications
- Ideal solution for large cross sections
- All seals are made-to-order; no equipment modifications required
- Custom profiles available

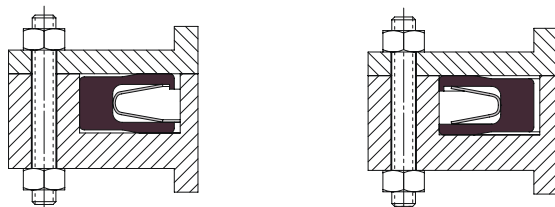

SPECIFICATIONS



| Material (designation) | Temperature °C (°F) |
|------------------------|-------------------------|
| AWC300 | -156 – 200 (-250 – 400) |
| AWC400 | -156 – 204 (-250 – 400) |
| AWC510 | -156 – 204 (-250 – 400) |
| AWC520 | -268 – 204 (-450 – 400) |
| AWC610 | -200 – 82 (-325 – 180) |
| AWC630 | -73 – 204 (-100 – 400) |

PRODUCT PROFILES



SES600

Seal Materials

Just like hydraulic and pneumatic systems, fluid power transmission systems are utilized in a wide variety of applications and under broad operating and environmental conditions. The seals used in fluid power transmission systems significantly influence the functionality, reliability, and effectiveness, as well as the environmentally friendly operation of those systems.

Similar to how using the proper type of seal for a given application/system is critical, choosing the appropriate seal material is important for achieving the best possible seal performance. There are a variety of materials to choose from when solving different sealing problems presented by technical, reliability, and environmental challenges. The proper selection of seal material will help to achieve reasonable, expected service intervals and a full service life.

There are four major groups of synthetic polymers available for utilization across a broad range of industrial applications:





- **Polyurethanes:** thermoplastic (AU) and thermoset (EU) polyurethanes (Table 1 shows a list of common polyurethanes)
- **Elastomers (rubbers):** nitrile rubber (NBR), hydrogenated nitrile rubber (H-NBR), ethylene propylene diene monomer rubber (EPDM), fluorocarbon rubbers (FPM), vinyl methyl silicon rubber (MVQ), tetrafluoroethylene (TFE) (Table 2 shows a list of common elastomers)
- **Fluoroplastics:** PTFE and its different compounds such as bronze-filled, glass, carbon/graphite (Table 3 shows a list of common PTFE compounds)
- **Engineered Hard Plastics:** rigid thermoplastics and thermosets and their different composites (Table 4 shows a list of common engineered hard plastics)



Seal material properties provide and maintain the sealing function of the seal components during the service life. The most important considerations during the material selection process are the following:

- Proper durometer (hardness) and flexibility for tight sealing (sealability) and to avoid leaks
- Proper temperature resistance through a broad temperature range
- Good chemical resistance against utilized medias in order to maintain physical properties of the seal material and seal components, which enables material to be used in a wide diversity of hydraulic fluids and medias
- Excellent gap extrusion resistance to withstand elevated system pressure and shear stress caused by fluid pressure
- Ability to maintain the elasticity over a broad operating temperature range
- Elasticity maintained over the expected service life, having resistance against compression set, and good stress relaxation behavior
- Mating surface roughness will create wear on the seal's contact area, which should be reduced as much as possible using wear-resistant material in order to avoid early wear out
- Improved tribological properties by low frictional values
- Proper durometer (hardness) and flexibility for easy installation

TABLE 1- POLYURETHANES

| Polyurethanes | | | | |
|---------------|---|---|-------------------|--|
| Material Code | Description | Color | Durometer Shore A | Material Characteristics |
| AWC800 | Thermoset polyether urethane (EU) | Dark maroon  | 95 | High durometer, high performance polyurethane. Excellent wear and tear resistance with low compression set. Excellent extrusion resistance at high pressure. Superior performance in heavy-duty hydraulic and pneumatic and slow rotary applications. |
| AWC825 | Thermoset polyether urethane (EU) | Dark blue  | 85 | Low durometer, high performance machinable polyurethane. Good wear and tear resistance and low compression set. Performs well in scored or worn equipment, heavy-duty hydraulic cylinders, and presses. |
| AWC830 | Thermoset polyether urethane (EU) FDA | Off white  | 94 | For use in food and pharmaceutical applications where FDA-listed material is required. |
| AWC860 | Thermoset polyether urethane (EU) high temp | Bright red  | 95 | Higher temperature use. Excellent wear and tear resistance with low compression set. Compatible with most hydraulic fluids except synthetics. Superior performance in hydraulic and pneumatic and slow rotary applications. Excellent extrusion resistance at high pressure. |

Seal Materials

TABLE 2 – ELASTOMERS






| Elastomer | | | | |
|---------------|-------------|---|-------------------|--|
| Material Code | Description | Color | Durometer Shore A | Material Characteristics |
| AWC704 | FPM | Black  | 85 | Fluorinated rubber that has excellent temperature and fluid compatibility. It is resistant to most hydrocarbons, and has good weather and ozone resistance. |
| AWC742 | NBR | Black  | 85 | Good general purpose elastomer material. Compatible in hydrocarbon-based fluids, alkalis, and acids. Low permanent set and good elasticity. Oil-resistant cost competitive material. |
| AWC752 | EPDM | Black  | 85 | The material has very good low-temperature properties, high resistance to ozone, aging, and weathering as well as polar solvents (alcohols, ketones, esters) and HFC liquids and glycol-based brake fluids. |
| AWC754 | EPDM FDA | White  | 82 | EPDM FDA white is FDA-CFR21.177.2600 compliant. |
| AWC727 | TFE/FEPM | Black  | 85 | Superior heat resistance. Compatible with steam/hot water with a recommended operating range of -10°C – 170°C (14°F – 338°F). Best compatibility with phosphate esters, amines, engine oils, pulp and paper liquors, and high concentrations of acid/alkali/oxidant. |

TABLE 3 – FLUOROPLASTICS













| Fluoroplastics | | | | |
|----------------|---------------------------------------|---|-------------------|--|
| Material Code | Description | Color | Durometer Shore D | Material Characteristics |
| AWC100 | PTFE Polyimide filled | Dark yellow  | 57 | Dry running or low viscosity petroleum-based applications. High PV value, mechanical toughness, and can be used at elevated temperatures with excellent fluid compatibility. Not to be used in or around water. |
| AWC300 | PTFE Glass + MoS ₂ -filled | Dark grey  | 56 | High-wear, high-pressure and high-speed applications. High PV values with excellent fluid compatibility. Excellent in high viscosity fluids. |
| AWC400 | PTFE Carbon/graphite-filled | Black  | 62 | Water and stem applications. High PV values. Excellent all-purpose material for rotary applications. Good electrical conductivity. |
| AWC500 | PTFE Bronze-filled | Bronze  | 67 | Good bearing and extrusion properties. Bronze provides higher thermal conductivity, allowing higher running velocities. Chemical resistance is somewhat lowered because bronze is attacked by some acids and alkalis. Best used in high-pressure hydraulic applications. |
| AWC510 | PTFE Mineral filled-FDA | White  | 66 | FDA listed material with better wear resistance than unfilled PTFE. Excellent where cleaner environments are required. |
| AWC520 | PTFE unfilled | White  | 62 | Static or slow-speed applications with low wear resistance. Works well in vacuum and low gas permeability applications. Superior fluid compatibility. |

TABLE 4 – ENGINEERED HARD PLASTICS

| Engineered Hard Plastics | | | | |
|--------------------------|------------------------------------|---|-------------------|---|
| Material Code | Description | Color | Durometer Shore D | Material Characteristics |
| AWC650 | POM Polyacetal | Black  | 85 | Excellent creep resistance under continuous load, fatigue as well as endurance under repeated cycles. |
| AWC663 | Polyamide Nylon | Off White  | 85 | Good general purpose polyamide material. Compressive strength 90 – 100 MPa (13,050 – 14,500 psi). |
| AWC665 | PA6 Nylon MoS ₂ -filled | Black  | 85 | Better wear properties with MoS ₂ than unfilled material. Bearing material. Compressive strength 100 – 110 MPa (14,500 – 15,950 psi). |
| AWC630 | PEEK unfilled | Tan  | 86 | Better wear characteristics. Tough, reliable, and dimensionally stable, even under continuous elevated temperatures. Excellent wear characteristics for seals and wear rings. |
| AWC635 | PEEK glass-filled | Cream  | 88 | Designed for improving the wear rate of unfilled PEEK (AWC630) in high performance applications. Tough, reliable, and dimensionally stable, even under continuous elevated temperatures. Good backup ring material in backup ring applications. |
| AWC615 | UHMWPE | White  | 68 | Excellent low friction and wear material. Great option for low temperature applications. Rated from -162°C to 110°C. High impact strength material resistant to chemical attack and moisture absorption. |

Oils Product Selection Guide

| Industrial Grade Oil | | | | | | | | |
|----------------------|-----------------------|---------------------|-------------------------------|------------------|------------------------------------|-------------------------------------|------------------------------|-----------------------|
| Name | Base Oil | ISO VG (ASTM D2422) | Operating Temperature | Specific Gravity | Viscosity @ 40 C (cSt) (ASTM D445) | Viscosity @ 100 C (cSt) (ASTM D445) | Viscosity Index (ASTM D2270) | Pour Point (ASTM D97) |
| 601 | Mineral | 22 | -23°C – 150°C (-10°F – 300°F) | 0.90 | 22 | 4 | 58 | -25°C (-13°F) |
| 610 HT | Synthetic POE | 460 | -25°C – 250°C (-15°F – 482°F) | 0.97 | 473 | 71 | 230 | -40°C (-40°F) |
| 610 Plus | Synthetic POE | 68 | -25°C – 270°C (-15°F – 520°F) | 0.99 | 68 | 11 | 130 | -45°C (-49°F) |
| 610 MT Plus | Synthetic POE | 220 | -25°C – 270°C (-15°F – 520°F) | 0.98 | 220 | 22 | 130 | -25°C (-13°F) |
| 652 | Mineral | 22 | -23°C – 150°C (-10°F – 300°F) | 0.90 | 22 | 4 | 58 | -25°C (-13°F) |
| 715 | Semi-Synthetic | 58000 | N/D | 0.89 | 58000 in service | 330 in service | 50 | 25°C (77°F) |
| 715 Gold | Proprietary Synthetic | 10000 | N/D | 0.89 | 9600 | 393 | 179 | 25°C (77°F) |

| Food-Grade Oil | | | | | | | | |
|----------------|----------------------------|---------------------|------------------------------|------------------|------------------------------------|-------------------------------------|------------------------------|-----------------------|
| Name | Base Oil | ISO VG (ASTM D2422) | Operating Temperature | Specific Gravity | Viscosity @ 40 C (cSt) (ASTM D445) | Viscosity @ 100 C (cSt) (ASTM D445) | Viscosity Index (ASTM D2270) | Pour Point (ASTM D97) |
| 690 FG | Mineral | 22 | -9°C – 120°C (15°F – 250°F) | 0.88 | 22 | <4 | 58 | -40°C (-40°F) |
| 650 AML | Plant-Based Esters | 22 | -21°C – 200°C (-6°F – 392°F) | 0.88 | 20.4 | 4.9 | 176 | -21°C (-6°F) |
| 720 CCG | Polymer-modified synthetic | 680 | -20°C – 215°C (-4°F – 419°F) | 0.91 | 707 | 57 | 143 | N/D |

Greases Product Selection Guide

| Industrial Grade Grease | | | | | | | | | |
|---|-------------------------------|-----------------|------------|--------------------|---------------------------|-------------------------------|--------------------------------------|-------------------------------------|--------------------------------|
| Name | Thickener | Base Oil | NLGI Grade | Base Oil Viscosity | Dropping Point ASTM D2265 | Service Temp | Four Ball Wear Weld Load, ASTM D2596 | Water Washout Resistance ASTM D1264 | Corrosion Resistance ASTM B117 |
| 613 Moly Grease <small>(Not available in EMEA)</small> | Lithium Complex | Mineral | 2 | 150 | 304°C (580°F) | -18°C – 150°C (0°F – 302°F) | 500 kg | <1.0 | 300 hours @50 microns |
| 615 HTG #1 | Calcium Sulfonate Complex | Mineral | 1 | 100 | 300°C (572°F) | -45°C – 204°C (-50°F – 400°F) | 620 kg | <1.0 | >1000 hours @50 microns |
| 615 HTG #2 | Calcium Sulfonate Complex | Mineral | 2 | 100 | 318°C (604°F) | -40°C – 204°C (-40°F – 400°F) | 620 kg | <0.05 | >1000 hours @50 microns |
| 615 HTG #2-460 | Calcium Sulfonate Complex | Mineral | 2 | 460 | 300°C (572°F) | -40°C – 204°C (-40°F – 400°F) | 620 kg | <3.0 | >1000 hours @50 microns |
| 635 SXC | Calcium Sulfonate Complex | Synthetic (PAO) | 2 | 100 | 318°C (604°F) | -40°C – 240°C (-40°F – 464°F) | 800 kg | <0.05 | >1000 hours @50 microns |
| 638 EMG 100 | Proprietary Sulfonate Complex | Synthetic (PAO) | 2 | 100 | 318°C (604°F) | -40°C – 240°C (-40°F – 464°F) | 800 kg | <0.05 | >1000 hours @50 microns |
| 638 EMG 46 | Proprietary Sulfonate Complex | Synthetic (PAO) | 2 | 40 | 318°C (604°F) | -40°C – 240°C (-40°F – 464°F) | 620 kg | <0.05 | >1000 hours @50 microns |

| Food Grade Grease | | | | | | | | | |
|---|---------------------------|-----------------|------------|--------------------|---------------------------|-------------------------------|--------------------------------------|-------------------------------------|--------------------------------|
| Name | Thickener | Base Oil | NLGI Grade | Base Oil Viscosity | Dropping Point ASTM D2265 | Service Temp | Four Ball Wear Weld Load, ASTM D2596 | Water Washout Resistance ASTM D1264 | Corrosion Resistance ASTM B117 |
| 625 CXF | Calcium Sulfonate Complex | Mineral | 2 | 100 | 318°C (604°F) | -30°C – 204°C (-22°F – 400°F) | 620 kg | <0.05 | >1000 hours @50 microns |
| 630 SXCF | Calcium Sulfonate Complex | Synthetic (PAO) | 2 | 40 | 318°C (604°F) | -40°C – 240°C (-40°F – 464°F) | 620 kg | <0.05 | >1000 hours @50 microns |
| 630 SXCF 220 #1 <small>(Not available in EMEA)</small> | Calcium Sulfonate Complex | Synthetic (PAO) | 1 | 220 | 316°C (600°F) | -40°C – 240°C (-40°F – 464°F) | 400 kg | 1.0 | >1200 hours @50 microns |

INDUSTRIAL OILS

610 Plus, 610 MT Plus, 610 HT

Synthetic Lubricating Fluid—High-Temperature Service

Premium-quality, 100% synthetic fluid that cleans as it lubricates over a wide temperature range of -25°C – 270°C (-15°F – 520°F).

Product Characteristics

- Low evaporation
- Low-carbonizing
- High-detergency—self-cleaning
- E.P. additives increase load carrying ability

Available Container Sizes:

610 Plus: 475 ml, 3.8 l (1 gal)*, 20 l, 208 l

610 MT Plus: 20l, 208 l

610 HT: 3.8 l, (1 gal)*, 20 l, 208 l

*5 l replaces 3.8 l in EMEA

Applications

- Equipment operating at elevated temperatures
- Refrigerated areas
- Severe environments
- Oven and high-temperature chains



- Reduces lubricant consumption
- Reduced equipment cleaning and downtime
- Reduces energy consumption
- Increases equipment life



Typical applications include oven chains, chain conveyors, drying ovens, heat treating conveyors, ceramic ovens.

Technical Data 610 Plus

| | |
|--|-------------------------------|
| ISO VG (ASTM D2422, DIN 51 519) | 68 |
| Temperature Range | -25°C – 270°C (-15°F – 520°F) |
| Flash Point | 310°C (590°F) |
| Four Ball Wear Test (ASTM D2266, DIN 51 350/5) Scar Diameter | 0.38 mm |

Technical Data 610 MT Plus

| | |
|--|-------------------------------|
| ISO VG (ASTM D2422, DIN 51 519) | 220 |
| Temperature Range | -25°C – 270°C (-15°F – 520°F) |
| Flash Point | >290°C (>554°F) |
| Four Ball Wear Test (ASTM D2266, DIN 51 350/5) Scar Diameter | 0.38 mm |

Technical Data 610 HT

| | |
|--|-------------------------------|
| ISO VG (ASTM D2422, DIN 51 519) | 460 |
| Temperature Range | -25°C – 250°C (-15°F – 482°F) |
| Flash Point, C.O.C. (ASTM D92, ISO 2592) | 225°C (437°F) |
| Four Ball Wear Test (ASTM D2266, DIN 51 350/5) Scar Diameter | 0.35 mm |

INDUSTRIAL OILS

650 AML

Advanced Machinery Lubricant

High Performing, Readily Biodegradable

Chesterton 650 AML is a high performing, readily biodegradable lubricant designed to creep into internal workings of chains, cables, pneumatics, needle bearings, and sliding mechanisms. It is engineered with a unique blend of plant-based natural and synthetic esters making it environmentally friendly and worker-safe.

650 AML penetrates deep into valves, pistons, and other pneumatic components to protect against friction and wear improving energy efficiency. Inherent detergency in this lubricant disperses dirt and debris, and removes gums and varnish prolonging the life of chains, cables and mechanical equipment. It improves the efficiency of automatic lubrication systems by eliminating trace moisture and contaminants from distribution lines, controls, and components.

650 AML is NSF H1 certified and is free of any animal fats, oils, and animal derived by-products.

Product Characteristics

- Biodegradable
- Low mist hazard, low odor
- Reduces friction and wear
- Exhibits high load and extreme pressure capabilities
- NSF H1 Registered

Applications

- Air actuated valves, pneumatic cylinders, solenoids
- Conveyor chains, slideways, and wire ropes
- Air mist or oil injected lubricated bearings, and equipment
- Assembly, packaging, and filling machines



Technical Data

| | |
|---|-----------------------------|
| ISO VG (ASTM D 2422, DIN 51 519) | 22 |
| Temperature Range | 21°C – 200°C (-6°F – 392°F) |
| Flash Point (ASTM D 93, DIN 51 755) | 211°C (412°F) |
| Four Ball Wear Test (ASTM D 4172) | |
| Scar Diameter | 0.395 mm |
| Four Ball EP Test (ASTM D 2783) Weld Load | 1961 N, 200 kg |
| Pin and Vee Block (ASTM D 3233) | |
| Failure Load, Max | 17587 N, 1793 kgf |
| Torque | 4.61 N-m |
| Coefficient of Friction | 0.05 |



- Self-cleaning, removes residue and sticky buildup
- Low friction, significantly reduces power consumption
- Reduces wear, prolongs equipment life
- Environmentally friendly ester technology
- Free of any animal fats, oils, and animal derived by-products

Available Container Sizes

475 ml, 20 l, and 208 l

INDUSTRIAL OILS

601

Chain Drive Pin and Bushing Lubricant

Premium-quality, light oil that penetrates between the close clearance of chain drive bushings and pins to provide critical lubrication.

Product Characteristics

- Rapid penetration
- E.P. additives increase load carrying ability
- No dirt and dust buildup
- No sticky lubricant residues
- Long-lasting, non-drying film
- -23°C – 150°C (-10°F – 300°F)

Available Container Sizes:

Aerosol, 475 ml, 3.8 l (1 gal)*, 20 l, 208 l

*5 l replaces 3.8 l in EMEA. 475ml is not available in EMEA.

Applications

- Chain-driven machinery
- Conveyors
- Packaging equipment
- Hoist chains
- Forklift trucks
- Chain saws



- Increases chain life
- Reduces lubricant consumption
- Reduces energy consumption
- Creeps into pins and bushings
- Can be used with Spraflex® 715 or 715 Gold in severe wet conditions

652

Pneumatic Lubricant and Conditioner

High performance, low-viscosity formulation reduces up to 90% of pneumatic maintenance costs, decreases downtime. Cleans, protects, and prolongs the life of pneumatic equipment.

Product Characteristics

- Will not cause sludge buildup
- Prevents seals/O-Rings from drying out
- Reduces power consumption
- Cleans rust, sludge, and dirt from all air tools as it lubricates
- -23°C – 150°C (-10°F – 300°F)

Available Container Sizes: 475 ml, 20 l, 208 l

Applications

- Air tools
- Cylinders
- Air line lubricators
- Air impact wrenches, hammers, drills
- Production air systems
- CNC machines
- Robotics
- Assembly line tools



- Lowers friction and reduces air cost
- Cleans and lubricates
- Prevents corrosion
- Disperses dirt and dust

690 FG

Food-Grade Lubricant

High quality, multi-purpose penetrating lubricant used throughout food and beverage facilities to prolong the life of machinery and parts while reducing costs.

Product Characteristics

- Clear, colorless, odorless
- Safe and easy to use in bulk or aerosol
- -9°C – 120°C (16°F – 248°F)
- NSF registered H1

Available Container Sizes: Aerosol, 3.8 l (1 gal)*, 20 l, 208 l

*5 l replaces 3.8 l in EMEA

Applications

Food, beverage, and pharmaceutical processing equipment, including

- Chain drives
- Pistons
- Valves
- Rollers
- Pneumatics



- Safe to use on food processing equipment*
- Reduces energy consumption
- Increases equipment life

INDUSTRIAL OILS

720 CCG

Chain, Cable, Gear Lubricant

Extreme Pressure, Water, and Corrosion Resistant

Chesterton 720 CCG is a multi-use, off-white translucent, polymer-modified synthetic lubricant. This product is well suited for applications requiring a high-pressure resistance and a durable film to protect equipment.

Due to high shear strength and self-adhering film, 720 CCG will not fling off or extrude like ordinary oils and greases. Chesterton 720 CCG forms a robust “wear shield” which stays in place even under the most extreme pressures. The contact surfaces are cushioned, thereby extending life of chains, sprockets, wire ropes, and gear drives.

720 CCG lubricant’s anti-corrosion action and water resistance protect chains, wire ropes, and gears exposed to moisture and corrosive liquids and vapors, far exceeding conventional grease technology.

Product Characteristics

- High pressure resistant
- Water and corrosion resistant
- Shear stable lubricant
- Light color, translucent film; off-white
- NSF registered H1

Applications

- Chain drives/sprockets
- Small pitch open gears
- Hoists/cranes, wire ropes/cables
- Oven chains and chain conveyors
- Worm drive gearboxes, motor-operated valves



- Lubrication and protection in one product
- Polymer-modified synthetic base
- Self-adhering, non-dripping lubricant

Available Container Sizes

Aerosol, 475 ml, 20 l, and 208 l

Technical Data

| | 720 CCG | 720 CCG with Diluent |
|--|---------------------------------|---------------------------------|
| ISO VG (ASTM D 2422) | 680 | 680 in service* |
| Texture | Tacky, Semi-Fluid Grease | Tacky, Thixotropic Fluid |
| Color | Off-white | Off-white |
| Apparent Viscosity, Brookfield, @25°C | 150000 cPs | 6200 cPs |
| Four Ball Weld (ASTM D 2596, DIN 51 350/4) Weld Load | 800 kgf (1763 lbf) | 800 kgf (1763 lbf) |
| Four Ball Wear (ASTM D 2266, DIN 51 350/5) Scar Diameter | 0.57 mm | 0.57 mm |
| Corrosion Resistance, 5% NaCl (ASTM B117) | >1000 hrs. @50 micron thickness | >1000 hrs. @50 micron thickness |

* After diluent evaporated

INDUSTRIAL OILS

715 Spraflex® and 715 Spraflex® Gold

Adhesive Surface Lubricant to Protect Gears, Sprockets, Chains, and Wire Ropes

A surface lubricant for chain drives, open gears, and wire rope. Provides a long-lasting, non-extruding "wear shield" to protect equipment operating under heavy loads.

Product Characteristics

- No lubricant squeeze-out
- Non-drip
- Self-adhering, flexible lubricant
- Resistant to acid fumes
- Guards against rust and corrosion

Available Container Sizes:

715: Aerosol, 20 l, 208 l
715 Gold: Aerosol, 20 l, 208 l

Applications

- Chains
- Open gears
- Wire ropes and cables
- Equipment in wet or underwater environment

Note: Use Chesterton 715 Spraflex Gold where a clean, non-staining film is needed



- Reduces lubricant consumption
- Water-resistant
- Provides long-term equipment life
- Can be used with 601 Chain Drive and Pin Bushing Lubricant

INDUSTRIAL GREASES

615 High-Temperature Grease

Available in Three Formulations: #1, #2, #2-460

High performance, corrosion-inhibited grease with outstanding extreme pressure capabilities and excellent water washout resistance.

Temperature limit -40°C – 204°C (-40°F – 400°F).

Product Characteristics

- Speed Factor (NDM) 40°C – 100°C:
615 HTG#1 and 615 HTG#2: 70000 – 300000
615 HTG#2 460: <70000
- Superior water resistance
- Excellent corrosion protection
- Compatible with most popular greases
- Exceptional shear resistance
- Antioxidants prevent hardening
- QBT™ Quiet Bearing Technology

Available Container Sizes:

615 HTG #1: 400 g, 18 kg, 55 kg, 180 kg
615 HTG #2: 400 g, 18 kg, 55 kg, 180 kg
615 HTG #2-460: 400 g, 18 kg, 180 kg

Applications

- High water, temperature environment plants including**
- Pulp and paper mills
 - Mining operations
 - Steel, aluminum, and metal processing
 - Marine
 - Power
 - Water and wastewater



- Extends bearing life
- Reduces downtimes
- Increases productivity
- Reduces grease consumption

625 CXF

Corrosion-Resistant, Extreme-Pressure Food Grease

High performance, corrosion-inhibited grease with outstanding extreme-pressure capabilities and excellent water washout resistance.

Temperature limit -30°C – 204°C (-22°F – 400°F)

Product Characteristics

- Speed Factor D_m 40°C – 100°C
(104°F – 212°F) 50000 – 300000*
- Excellent water washout
- Corrosion resistant
- NSF registered H1

Available Container Sizes: 400 g, 18 kg, 55 kg

*Consult Chesterton Application Engineering for concerns on compatibility.

Applications

- Processing and packaging machinery
- Slides
- Grease lubricated chains
- Bottle and carton filling machines
- Paste and sauce fillers
- Conveyor belts
- Rollers
- Canning machinery



- Nearly impervious to water and steam
- Complies with sections 178.3570 of FDA food additives regulations

INDUSTRIAL GREASES

630 SXCF, 630 SXCF 220 #1*

Synthetic, Extreme-Pressure, Corrosion-Resistant Food Grease

High performance, food-grade, corrosion-inhibited grease with outstanding extreme pressure capabilities and excellent water washout resistance.

Temperature limit -40°C – 240°C (-40°F – 464°F).

Product Characteristics

- Speed Factor (NDm):
630 SXCF: 150 000 – 800,000
630 SXCF 220#1: 50000 – 300000
- Superior water washout resistance
- Excellent corrosion protection
- Compatible with most popular greases
- Exceptional shear resistance
- Antioxidants inhibit hardening or crystallization
- NSF registered H1

Available Container Sizes:

630 SXCF: Aerosol, 400 g 18 kg, 55 kg
630 SXCF 220 #1*: 400 g 18 kg, 55 kg, 180 kg

*Product is not available in EMEA

Applications

- Food, pharmaceutical, beverage industries
- Processing and packaging machines
- Bottling equipment
- Fruit feeders
- Paste and sauce fillers
- Canning machinery
- Meat packaging equipment
- Carton filling equipment
- Use 630 SXCF 220 #1 on larger bore bearings >75 mm (>3")



- Extends bearing life
- Reduces downtimes
- Increases productivity
- Reduces grease consumption

635 SXC

Synthetic, Extreme-Pressure, Corrosion-Resistant Grease

High performance, corrosion-inhibited grease with outstanding extreme pressure capabilities and excellent water washout resistance; 635 is synthetic-based and offers superior high-temperature stability and resistance to steam and corrosive chemicals. Temperature limit -40°C – 240°C (-40°F – 464°F).

Product Characteristics

- Speed Factor (NDm): 100000 – 500000
- Superior water washout resistance
- Excellent corrosion protection
- Compatible with most popular greases
- Exceptional shear resistance
- Antioxidants inhibit hardening or crystallization

Available Container Sizes: 400 g, 18 kg, 55 kg, 180 kg

Applications

- Electric motors
- HVAC/fans and blowers
- Conveyor bearings
- Mixers, agitators, and pumps
- Guides/slides



- Extends bearing life
- Reduces downtimes
- Increases productivity
- Reduces grease consumption

638 EMG 100/638 EMG 46

High Performance Electric Motor Grease Available in Two Formulations: EMG 100, EMG 46

Synthetic-base oil lubricating grease. Superior multi-purpose grease for heavy loads, high heat, and corrosive environments.

Product Characteristics

- Speed Factor (NDm):
638 EMG 100: 80000 – 500000
638 EMG 46: 200000 – 800000
- Superior water washout resistance
- Excellent corrosion resistance

Available Container Sizes: 400 g, 18 kg

Applications

- Electrical motors and generators
- Forced draft motors, induction draft fans, fin fans
- HVAC/fans and blowers
- Medium-to high-speed ball and roller bearings
- Motors operating in high speeds and low temperature conditions



- Excellent thermal and mechanical stability
- Virtually waterproof and steam-resistant
- Resistant to extreme pressure and vibration

ANTI-SEIZES

725

Nickel Anti-Seize Compound

A high performance, nickel-based anti-seize that combines the extreme pressure, corrosion-resistant, anti-seize abilities of colloidal nickel in an oil suspension that can withstand temperatures up to 1425°C (2597°F).

Product Characteristics

- Ultra-fine particles
 - Guards against galling and corrosion
 - Protects against self-welding
 - Withstands extreme pressure
 - Up to 1425°C (2597°F)
 - Does not contribute to the formation of hexavalent chromium.
- Available Container Sizes: Aerosol, 250 g, 500 g, 20 l (24 kg)

Applications

- Covers all industries
- Mechanical assembly of:**
- Bolts
 - Studs
 - Flanges
 - Press fits
 - Valve stems
 - Pump sleeves
 - Gas Turbines
 - Screws
 - Bushings
 - Gaskets



- Lubricates for assembly and disassembly
- Protects against corrosion
- No need for torque tension recalculation

772

Premium Nickel Anti-Seize Compound

High performance, premium quality, nickel-based anti-seize formulated specifically for the power industry. Conforms with specifications restricting the levels of halogens, sulfur, and low melting point metals.

Product Characteristics

- Water resistant
 - Guards against galling and corrosion
 - Protects against self-welding
 - Withstands extreme pressure
 - Applicable where copper use is prohibited
 - Conforms to GE D5Y0P12
- Available Container Sizes: 500 g

Applications

- Bolts
- Studs
- Flanges
- Press fits
- Valve stems
- Pump sleeves
- Steam Turbines
- Gaskets



- Meets MIL-A-907F
- Ultra-fine particles
- Eases mechanical assembly and disassembly

783 ACR

Corrosion-Resistant Anti-Seize

783 combines high performance, industrial anti-seize performance with extreme corrosion protection and water washout resistance. 783 is ideal when the primary cause of bolt seizure is corrosion.

Product Characteristics

- Eases disassembly up to 900°C (1652°F)
 - Fills in microscopic voids
 - No toxic heavy metals
 - For extreme pressure up to 8928 kg/cm² (127000 psi)
 - Safer than traditional metallic-based anti-seizes
- Available Container Sizes: 250 g, 500 g, 20 l (24 kg)

Applications

- Covers all industries
- Bolts
 - Screws
 - Studs
 - Pipe threads
 - Press fits
 - Pump sleeves



- Extreme corrosion protection and water washout resistance
- Lubricates for assembly and disassembly

ANTI-SEIZES

785/785 FG

Parting Lubricant

The “new generation” anti-seize compound contains a blend of ultra-fine, inorganic solid lubricants in a non-carbonizing, ashless synthetic carrier. Withstands severe temperature and pressure conditions to assist in disassembly of threaded parts.

Product Characteristics

- Eases disassembly up to 1204°C (2200°F)
 - Fills in microscopic voids
 - No toxic heavy metals
 - For extreme pressures up to 4730 kg/cm² (67570 psi)
 - 785 FG is NSF registered H1
- Available Container Sizes:**
 785: Aerosol, 200 g, 250 g, 500 g, 20 l (24 kg)
 785 FG: 200 g, 500 g

Applications

- Covers all industries**
- Bolts
 - Screws
 - Studs
 - Pipe threads
 - Press fits
 - Pump sleeves
 - Use 785 FG for all food, beverage, and pharmaceutical applications
 - 785 FG has extreme pressure capabilities up to 10609 kg/cm² (150000 psi)



- Lubricates for assembly and disassembly
- Protects against corrosion
- No need for torque tension recalculation

MAINTENANCE SPECIALTIES

390

Cutting Oil

A heavy-duty, multi-purpose, oil-based cutting fluid to provide maximum tool life and superior parts finish. The high viscosity oil clings to drills, taps, bores, etc. and will provide maximum friction reduction. Available in aerosol format only.

Product Characteristics

- Use on hard or soft ferrous metals
 - Powerful extreme pressure additives
 - Provides maximum tool life
 - Excellent part finish
 - Clings to vertical and overhead surfaces
 - No unpleasant odors
 - NSF registered H2, U2
- Available Container Sizes:** Aerosol

Applications

- Broaching
- Boring
- Drilling
- Sawing
- Reaming
- Milling
- Pipe threading
- Countersinking



- Cleaner cuts
- Deters metal-to-metal microwelding, galling, and built-up edges
- Protects from rust

723/723 FG Sprasolvo™

Penetrating Oil

Fast-acting, penetrating oil in a convenient, non-flammable propellant aerosol can. Excellent for hard to reach areas where rust, tar, grease, and dirt may prevent easy removal of nuts, bolts, and fittings.

Product Characteristics

- Pinpoint spray
 - Safe on plastic and painted surfaces
 - Aromatic free
 - Creeps into microscopic spaces
 - Optimize bolting reliability with Chesterton 783 ACR or 785 Parting Lubricant
- Available Container Sizes:** 723: Aerosol, 475 ml
 723 FG: 475 ml

Applications

- Use on all corroded or seized threaded assemblies in the harshest industrial environments
- Use 723 FG for food, beverage, and pharmaceutical applications



- Single function—optimizes performance
- Fast-acting
- Contains no harsh solvents

475ml - Not available in EMEA.

MAINTENANCE SPECIALTIES

730 Spragrip®

Belt Dressing

Superior, energy-efficient belt dressing in a convenient aerosol package. Lengthens life of leather, rubber, canvas, or plastic belts; reduces belt slippage for all V, flat, and round belts.

Product Characteristics

- Eliminates slippage
- No glazing or hardening
- Non-staining
- Preserves belts in inventory
- No rosins, asphalt, or hard solvents
- NSF registered P1

Available Container Sizes: Aerosol

Applications

- Belt drives
- Fans
- Conveyor belts
- Generators
- Pumps
- Compressors



- Waterproofs and prevents slipping even under the most humid conditions
- Extends belt life

740 and 775

740 Heavy-Duty Rust Guard and 775 Moisture Shield

These corrosion-preventative coatings provide heavy-duty metal protection for all areas constantly exposed to humidity and corrosive fumes—without critical surface preparation. For inventory part needs:

- Short-term—775 is a thin, oily film for protection up to six months
- Long-term—740 is a thick, waxy film for protection up to two years

Product Characteristics

- Self-healing, if scratched
- Transparent brown

Available Container Sizes:

740: Aerosol, 3.8 l (1 gal)*, 20 l, 208 l

775: 20 l, 208 l

*5 l replaces 3.8 l in EMEA

Applications

- Molds, castings, and tooling
- Parts in process
- Parts in storage
- Pumps, valves, flanges, and pipe work
- Indoor structural steel

Note: Product can be easily removed with Chesterton's 276 Electronic Component Cleaner or 274 Industrial Degreaser



- Provides up to two years corrosion protection under sheltered outdoor conditions
- Does not peel or flake
- Excellent resistance to acid, alkali, and salt air fumes

752

Cold Galvanizing Compound

Zinc rich primer or final protective coating for metals exposed to atmospheric or corrosive conditions. The one-part system provides three types of corrosion protection: barrier, galvanic, and zinc oxide. A quick, cost-effective way to cold galvanize parts and finished product.

Product Characteristics

- Fast drying
- Self-healing
- One-part system
- Paintable
- Conforms to MIL-P-46105, MIL-P-21035, and MIL-P-26915

Available Container Sizes: Aerosol, 2.7 kg

Applications

- Steel and iron surface/structures
- Structural steel tanks
- Transmission towers
- Underground pipelines
- Automotive bodies
- Marine equipment
- Mining equipment
- Metal roofs
- Welds
- Ducts



- 95% pure zinc in dried film
- Three way corrosion protection

MAINTENANCE SPECIALTIES

763 Rust Transformer™

Surface Conversion Rust Treatment

A mild, natural acid-based product that electrochemically transforms rust into a corrosion inhibiting protective film. Provides an excellent, low-cost alternative to sandblasting for surface preparation.

Product Characteristics

- Cleans up with water
- No strong acids
- Biodegradable
- Forms protective film

Available Container Sizes: 3.8 l (1 gal), 20 l, 208 l

Applications

- Coatings on storage tanks
- Auto or truck bodies
- Heavy equipment
- Pumps, motors, and valves
- Transmission line towers
- Structural steel



- Easy to apply
- No sandblasting required
- Safe for workers
- Ideal for maintenance painting service preparation

800 GoldEnd® Tape

100% Pure PTFE Sealant Tape

Heavy-duty, high-density, tear-resistant, moldable, dry PTFE sealant tape for use on metal or plastic threads, pipes, or bolts.

Product Characteristics

- -240°C – 260°C (-400°F – 500°F)
- Seals tightly and opens easily
- Non-aging, non-hardening
- Chemically resistant
- Requires fewer wraps
- Resists tearing and breakage
- Won't clog lines
- NSF registered H1, S2

Available widths: 6.4 mm (1/4"), 12.7 mm (1/2"), 19.1 mm (3/4"), 25.4 mm (1")

Applications

- **Liquids:** Steam, water, salt water, air, fuels, refrigerants, acids, alkalis, all solvents
- **Gases:** Hydrogen, ammonia, oxygen, propane, butane, nitrogen
- **Other:** Pneumatic and hydraulic fittings up to 690 bar (10000 psi)



- Seals with 1½ to 2 wraps—virtually all chemicals
- Adjustable by 90°, no leakage
- No waste

900 GoldEnd® Paste

PTFE Thread Sealant and Lubricant

Non-hardening, non-corrosive, moldable PTFE thread sealant and lubricant for the most difficult of sealing demands on pipe joints, pneumatic fittings, and hydraulic line applications.

Product Characteristics

- UL Listed
- Non-corrosive and non-toxic
- Safe for PVC, CPVC, plastic pipe fittings
- NSF registered H2, S2

Available Container Sizes: 200 g, 500 g, 20 l

Applications

- Non-hardening thread sealant and lubricant for liquids, gases, or hydraulic fittings
- Ideal for stainless steel



- No volatile solvents
- Ultra-fine PTFE particles

MAINTENANCE SPECIALTIES

860

Moldable Polymer Gasketing

Easily and economically create an ultra-thin gasket that conforms to irregular and worn-out surfaces

Two-part, flexible gasketing material which fills in surface irregularities, stops leaks, and never sticks to surfaces after curing.

Use 860 Moldable Polymer Gasketing to handle almost every gasketing application, eliminating the need to inventory pre-cut gaskets or sheets of gasketing. Disassembly of equipment is always easy when sealed with 860 Moldable Polymer Gasketing because it will not stick to the surface. Just peel the gasket off, no scraping is necessary.

Product Characteristics

- Resistance to oils, water, chemicals, and solvents
- Never sticks to surfaces
- Fills voids and scratches, up to 6 mm (1/4") deep
- Remains elastic
- Temperatures up to 260°C (500°F)
- Steam pressure at 170°C (338°F) up to 6.8 kg/cm² (100 psi)

Applications

For sealing complex mechanical assemblies

- Gearboxes, inspection covers, bearing housings, fittings, oil sumps and reservoirs, turbine casings, electrical boxes, vacuum systems
- NSF Registered S2/P1

Caution: Not for use in contact with concentrated acids or hot concentrated caustics



- Economical
- Creates gaskets any size and shape
- Ease of application—speeds up maintenance

Available Container Sizes

Kit (includes 2 aerosols and 2 cartridges)



Technical Data

| | |
|--------------------------------|---|
| Cure Time* at 25°C (77°F) | Gel time 3 – 4 hours (Full cure 24 hours) |
| Coverage per 400 grams | |
| 3 mm (1/8") bead | 3289 linear cm (108 linear feet) |
| 6 mm (1/4") bead | 822 linear cm (27 linear feet) |
| Temperature Limit (Continuous) | -51°C – +260°C (-60°F – +500°F) |

*After application of curing agent. Cures faster at higher temperatures.

Cleaners and Degreasers Product Selection Guide

| | | ✓+ = Excellent | | | | | | |
|--|--|------------------------------|--|----------------------------------|-------------------------------------|--|------------------------------------|----|
| | | ✓ = Good | Recommended Chesterton Cleaners and Degreasers | | | | | |
| WATER-BASED CLEANERS | | | SOLVENT BASED CLEANERS | | | | | |
| Soil/Deposit | Heavy Oil, Adhesives, Glues | 803 | Surface | Paint and Plastic Safe | 274 Industrial Degreaser ✓+ | 292 PDS Precision Degreasing Solvent* ✓+ | 294 CSD Critical Surface Degreaser | |
| | Grease, Petroleum Oil, Dirt | 820 | Tough Soil | Heavy Oil, Adhesives | ✓ | ✓ | ✓+ | |
| Natural Oils—Animal Fat, Vegetable Oil | | 360 | Equipment and Method | Dip Tank | ✓ | | | |
| | Rust and Oxidation | 338 | | Ultrasonic | ✓ | | | |
| Application | Parts Degreasing Shop | Manual Brush or Wipe | | 820 | Manual Brush or Wipe | ✓ | ✓+ | ✓+ |
| | | Parts Degreasing Station | | 820 | Closed Circulation, Pipeline | ✓ | | |
| | Parts Degreasing | Dip Tank | 820 | General Purpose and Applications | Food Processing Equipment | ✓+ | ✓ | ✓ |
| | | Pressure Washing | 803 | | Molds, Patterns, Presses | | ✓+ | ✓+ |
| Ultrasonic | | 820 | Vehicles and Transportation | | ✓ | ✓ | ✓+ | |
| Machinery/Plant Cleaning | | Closed Circulation, Pipeline | 803 | | QC and Inspection | | ✓ | ✓+ |
| | Tanks and Vessels | 803 | Textiles | | ✓ | ✓+ | ✓+ | |
| | Food Processing Equipment | 803 | Parts Preparation Cleaning | | ✓ | ✓+ | ✓+ | |
| | Building Structures, Floors, and Walls | 820 | | | | | | |
| | Floor Scrubbers | 820 | | | | | | |
| ELECTRICAL CLEANERS | | | 276 Electronic Component Cleaner | | 279 PCS Precision Cleaning Solvent* | | 296 Electro Contact Cleaner* | |
| Surface | Paint and Plastic Safe | | ✓+ | ✓+ | ✓+ | ✓ | | |
| | Sensitive Metal Safe | | ✓+ | ✓+ | ✓+ | ✓ | | |
| Soil | Grease, Petroleum Oil, Dirt | | ✓+ | ✓ | ✓ | ✓ | | |
| Cleaning Purpose | Electrical Motors—Energized | | | ✓+ | ✓+ | ✓+ | | |
| | Electrical Motors—Non-Energized | | ✓+ | ✓ | ✓ | ✓ | | |
| | Electrical Components—Energized | | | ✓+ | ✓+ | ✓+ | | |
| | Electrical Components—Non-Energized | | ✓+ | ✓+ | ✓+ | ✓ | | |

To see all Chesterton cleaners and degreasers, please go to chesterton.com *Not available in EMEA.

CLEANERS AND DEGREASERS

274

Industrial Degreaser

A hard surface degreaser for industrial and marine environments.

Product Characteristics

- Dissolves petroleum oil, grease, tar, and other inorganic soils
- Low odor, aromatic content
- Does not attack metal, most paints, and plastics
- Fast, penetrating action

Available Container Sizes: Aerosol, 20 l, 208 l

Applications

- Maintenance shops
- Dip tanks
- Hard surfaces
- Machined parts
- Recirculating and agitated parts washers



- Cost-effective
- Low evaporation, long lifetime, reduced consumption
- Improve worker safety
- High flash point

CLEANERS AND DEGREASERS

276

Electronic Component Cleaner

Fast evaporating, high performance, solvent based degreaser that does not contain ozone depleting solvents.


Product Characteristics

- Low residue
- Non-chlorinated
- No ozone depleting materials

Available Container Sizes: Aerosol, 20 l, 200 l

Applications

- **Spray cleaning**
- Switches, controllers, panel meters
- Circuit boards, contacts, levers
- Control panels
- **Hard surface degreasing**
- Equipment, motors
- Non-energized electrical equipment
- Parts in process

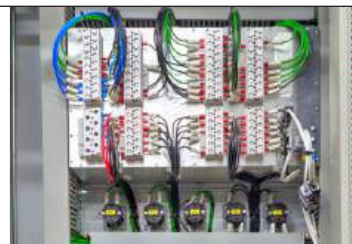

- Cleans quickly with a fast evaporation rate
- Does not attack plastic or metal

279 PCS*

Precision Cleaning Solvent

279 PCS is highly effective for use on electrical and electronic contacts and assemblies to remove light oils, particulates, grease, and other contaminants.

Product Characteristics

- Non-flammable
- Fast evaporation
- Low residue
- High dielectric strength
- No ozone depleting potential
- Safe for plastic and elastomers
- NSF registered K2

Available Container Sizes: Aerosol

**Product is not available in EMEA*

Applications

- Energized electrical equipment
- Control panels
- Switches
- Delicate instrumentation



- Environmentally friendly
- High purity

292 PDS* /294 CSD

292 Precision Degreasing Solvent / 294 Critical Surface Degreaser

A general purpose, fast-acting, industrial degreaser for critical equipment. Reduces maintenance and operation costs associated with downtime.

Product Characteristics

- Safe on all metals
- Safe on most plastics, rubbers, and coatings
- Contains no aromatic solvents
- NSF registered C1, K1, K3
- 292 Moderate evaporation; flashpoint: 41°C (105°F)
- 294 Extremely fast evaporation; flashpoint: -18°C (0°F)

Available Container Sizes: 292: Aerosol*
294: Aerosol

**Product is not available in EMEA*

Applications

- Chains and cables
- Gearboxes
- Dies and molds
- Bearings, pumps
- Air tools
- Forklifts
- Brakes and clutches
- Material handling equipment
- Parts and tools



- Removes dust, dirt, oil, and other industrial soils
- Dissolves resins, polymers, adhesives, and petroleum residues
- Leaves no residue

CLEANERS AND DEGREASERS

296*

Electro Contact Cleaner

Environmentally friendly contact cleaner for energized and non-energized electrical and electronic contacts and assemblies to quickly remove light oils and particulates from assemblies.

Product Characteristics

- Low residue
- Non-flammable
- No ozone depleting potential
- Safe for plastic
- Safer to use than petroleum-based products
- NSF registered K2

Available Container Sizes: Aerosol

*Product is not available in EMEA

Applications

- Switches
- Controllers
- Panel meters
- Circuit boards
- Contacts
- Levers



- Fast evaporation
- High dielectric strength
- No rinsing required

803

Industrial and Marine Solvent II**

A powerful, non-solvent-based degreaser. Its advanced surfactant technology offers maximum efficiency in soil removal, especially applications where solvent use is required.

Product Characteristics

- Cleaning dust, dirt, carbon black, petroleum-based oils
- Phosphate-free, no EDTA or toxic solvents
- No irritating fumes
- Compatible with pressure washers and steam cleaners
- 803 pH >12 diluted

Available Container Sizes: 3.8 l (1 gal)*, 20 l, 208 l, 1000 l

*5 l replaces 3.8 l in EMEA

**Should not be used on aluminum or metals sensitive to high alkalinity.

Applications

- Covers all industries**
- Cleaning production equipment, facilities, floors, walls, and steel structures



- Cost-effective—highly concentrated—dilute with water to use
- Strong, fast-acting
- Biodegradable

KPC 820/820N*

Moderate pH, Industrial, Water-Based Degreaser

Balance powerful performance with environmental compliance and worker safety. The ideal choice for process degreasing.

Product Characteristics

- Highly dilutable
- Safe on most metals
- No irritating fumes
- Compatible with pressure washer and steam cleaners
- 820 pH <10 diluted
- NSF registered A1

Available

Container Sizes: KPC 820: 20 l, 208 l, 1000 l
820N*: 20 l, 208 l

*Product is not available in EMEA

Applications

- Machine shop/maintenance
- Marine
- Pulp and paper
- Railroad equipment
- Chemical/oil processing
- Drilling rigs



- Safe for workers
- Biodegradable

AUTOMATIC LUBRICANT DISPENSERS

Lubri-Cup™ EM Series

Electro-Mechanical Automatic Grease Dispensers; Dispenses Grease Accurately at Timed Intervals

Automatic single-point lubricator dispenses Chesterton grease to critical areas, eliminating over- and under-greasing. Lithium ion battery recommended for cold temperatures. -15°C – 60°C (5°F – 140°F)

Product Characteristics

- Microprocessor-controlled, “pulse” delivery system
- Programmable—operates up to 24 months
- Lubricates up to 8 bearings up to 6 m (20 ft) away

Applications

- All Industries Including:**
- Pulp and paper mills
 - Metal fabrication
 - Marine
 - Mining operations
 - Steel mills

Versions Available

| | |
|----------------------------------|---|
| • Lubri-Cup EM 250cc and 500cc* | Battery operated |
| • Lubri-Cup EM-SP 250cc | Machine synchronized and externally powered (AC or DC power) |
| • Lubri-Cup EM-S 250cc* | Machine synchronized |
| • Lubri-Cup EM-XPL 250cc | Recommended for hazardous locations |
| • Lubri-Cup EM-VS 60*/120*/240cc | Equipped with vibration sensor to only operate when vibration is detected |

*Product is not available in EMEA



- User-friendly
- Cost-effective
- Refillable
- Reliable lubrication system
- Explosion proof

Lubri-Cup EM-XPL

- UL Certifications: Class I, Div2, Group A,B,C,D, T4, Class II, Div2, Group F,G, T4,
- ATEX: II 3 G/Ex ic IIB T4 Gc, IP65

Lubri-Cup™ OL 500 Oiler

“Pulse” Delivery; Automatic Lubrication System for Oils

Automatic lubricator dispenses Chesterton oils to chains and other critical areas.

Product Characteristics

- Microprocessor-controlled, “pulse” delivery system
- Programmable—operates up to 12 months
- Lubricates up to 4 points
- Sealed microprocessor

Applications

- All Industries Including:**
- Pulp and paper mills
 - Mining operations
 - Food, pharmaceutical, beverage industries
 - General industry
 - Saw mills
 - Steel mills

Versions Available

| | |
|-------------------------|--|
| • Lubri-Cup 500cc oiler | Battery operated |
| • Lubri-Cup 500cc oiler | Machine synchronized and externally powered (DC power) |
| • Lubri-Cup 500cc oiler | Machine synchronized and externally powered (AC power) |



- Cost-effective
- Environmentally friendly, refillable container
- User-friendly with a large LCD

AUTOMATIC LUBRICANT DISPENSERS

Lubri-Cup™ VG*

Variable Gas, Single-Point Automatic Lubricators

An automatic, single-point 250cc lubricator which dispenses Chesterton grease to critical areas, eliminating over- and under-greasing. VG pro-logic microprocessor chip control—simple programming.

Product Characteristics

- A compact, convenient, and sturdy design that is simple to install and operate
- Preset dispensing rates—1, 2, 3, 6, or 12 months
- Remote operation—up to 1 m (3 ft)
- Electrochemical operation (Nitrogen gas)

Applications

- All Industries Including:**
- Mining and ore processing
 - Power
 - Pulp and paper
 - Water and wastewater
 - Steel and metal processing

Versions Available

- | | |
|---------------------------------|-------------------------------|
| • Lubri-Cup VG 250cc 615 #1 | • Lubri-Cup VG 250cc 630 SXCF |
| • Lubri-Cup VG 250cc 615 #2 | • Lubri-Cup VG 250cc 633 SXCM |
| • Lubri-Cup VG 250cc 615 #2 460 | • Lubri-Cup VG 250cc 635 SXC |

*Product is not available in EMEA



- Cost-effective
- Transparent container for lubricant inspection
- Reliable lubrication system
- UL: Class I, Div I, Group A, B, C, D
- ATEX: Ex ia IIC T4 Ga
- IP: IP 68

Lubri-Cup™ VG Mini

Variable Gas, Single-Point Automatic Lubricators

Automatic, single-point lubricator dispenses Chesterton grease to critical areas, eliminating over- and under-greasing.

Product Characteristics

- A compact, convenient, and sturdy design that is simple to install and operate
- Preset dispensing rates—1, 3, 6, 9, or 12 months
- Remote operation—up to 1 m (3 ft)
- Electrochemical operation (Nitrogen gas)
- Sealed microprocessor

Applications

- All Industries Including:**
- Mining and ore processing
 - Power
 - Pulp and paper
 - Water and wastewater
 - Steel and metal processing

Versions Available

- | | |
|------------------------------------|--|
| • Lubri-Cup VG Mini 120cc 630 SXCF | • Lubri-Cup VG Mini 120cc 615 #2* |
| • Lubri-Cup VG Mini 120cc 635 SXC | • Contact Chesterton for other greases available |



- Cost-effective
- Transparent container for lubricant inspection
- Reliable lubrication system
- Ability to turn on and off
- UL: Class I, Div I, Group A, B, C, D. Class II, Div I, Group E, F, G
- ATEX: Ex ia IIC T4 Ga
- IP: IP 68

Lubri-Cup™ Products—Featured Summary

Select the Lubri-Cup dispenser that best fulfills your application needs. Chesterton Application Engineers are always available to assist you.

| Product | Model | Lubricant Volume | Dimensions | Available Dispensing Period | Max. Lube Points | Remote Installation | Operating Pressure | Operating Temperature Range | Certifications and Approvals |
|---|-----------------------------------|---------------------|----------------------------------|--|-------------------|------------------------------|--------------------------------------|--|--|
|  | Lubri-Cup VG Mini | 120CC | 77 mm (Ø3.03") x 111 mm (4.37") | 1, 3, 6, 9, 12 months | Single point only | Up to 1 M (3 ft) | Max 5kgf/cm ² (70 psi) | -20°C – 55°C (-4°F – 131°F) | UL: Class I, Div I, Group A, B, C, D. Class II, Div I, Group E, F, G IP: IP 68 |
|  | Lubri-Cup VG | 250CC | 97 mm (Ø3.82") x 163 mm (6.42") | 1, 2, 3, 6, 12 months | Single point only | Up to 1 M (3 ft) | Max 5kgf/cm ² (70 psi) | -20°C – 55°C (-4°F – 131°F) | UL: Class I, Div I, Group A, B, C, D IP: IP 68 |
|  | Lubri-Cup EM | 60CC, 125CC | 91 mm (3.58") x 181 mm (7.12") | 1 – 12 months | Up to 8 points | Up to 6 M (20 ft) per point | Max 60kgf/cm ² (850 psi) | -15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack | — |
| | | 250CC | 91 mm (Ø3.58") x 210 mm (8.27") | 1 – 12 months | Up to 8 points | Up to 6 M (20 ft) per point | Max 60kgf/cm ² (850 psi) | -15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack | — |
| | | 500CC | 92 mm (Ø3.62") x 260 mm (10.24") | Half (H) 1, 2, 3, 6, 12, 18, 24 months | Up to 8 points | Up to 6 M (20 ft) per point | Max 60kgf/cm ² (850 psi) | -15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack | — |
|  | Lubri-Cup EM-S & EM-SP | 125CC, 250CC | 91mm (Ø3.58") x 210 mm (8.27") | Half (H) 1, 2, 3, 6, 12 months | Up to 8 points | Up to 6 M (20 ft) per point | Max 60kgf/cm ² (850 psi) | -15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack | — |
|  | Lubri-Cup EM-VS | 60 CC, 120CC, 240CC | 91 mm (Ø 3.60") x 181 mm (7.13") | Up to 6 M (20 ft) per point | Up to 8 points | Up to 6 M (20 ft) per point | Max 60kgf/cm ² (850 psi) | -15°C – 60°C (5°F – 140°F); with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack | — |
|  | Lubri-Cup EM-XPL | 240CC, 480CC | 91 mm (Ø 3.58") x 210 mm (8.27") | 1 – 12 months | Up to 8 points | Up to 6 M (20 ft) per point | Max 60kgf/cm ² (850 psi) | -15°C – 60°C (5°F – 140°F) | Class I, Div. II, Group A, B, C, D, T4 Class II, Div. II, Group F, G, T4 ATEX: II 3 G/Ex ic IIB T4 |
|  | Lubri-Cup OL 500 Oiler | 500CC | 94 mm (Ø 3.7") x 229 mm (9") | 1, 2, 3, 6, 12, 18, 24 months | Up to 8 points | Up to 12 M (40 ft) per point | Avg. 10kgf/cm ² (142 psi) | -15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack | — |

Note: Not all units available in EMEA.



ARC Industrial Coatings Product Application Guide

These tables provide general guidelines for ARC product selection. Detailed product performance data can be found on product-specific data sheets and ARC chemical resistance guides.

ARC Industrial Coatings

Metal Coating Solutions

Wet Service Temperature

- <50°C (<120°F)
- 50 – 70°C (120 – 160°F)
- 70 – 90°C (160 – 195°F)
- 90 – 110°C (195 – 230°F)
- 110 – 130°C (230 – 265°F)
- 130 – 150°C (265 – 302°F)
- 150 – 180°C (302 – 360°F)

| | Specialty Coatings | | Erosion Resistant | | | Corrosion, Erosion, and Chemical Attack | | | | | | | Abrasion Resistant | | | FDA | |
|------------------|-------------------------|------------|------------------------------------|---------------------------------|--|---|---|---|--------------------------------------|-----------------------|-------------------------|--------------------------|-----------------------|---------------------------|-------------------------|-----|-----------------|
| | Patching/Repair/Rebuild | Machinable | Erosion/Corrosion Aqueous Solution | Erosion/Corrosion Mild Chemical | Erosion/Corrosion Elevated Temperature | Corrosion/Moderate Chemical | Corrosion/Harsh Chemical (Acid) Inorganic | Corrosion/Harsh Chemical (Acid) Organic and Bleaching Chemicals | Corrosion/Harsh Chemical (Alkalines) | Corrosion Flue Gasses | Potable Water Low Flow* | Potable Water High Flow* | Mild Sliding Abrasion | Moderate Sliding Abrasion | Severe Sliding Abrasion | | Impact Abrasion |
| 855 / 858 | √+ | √ | √+ | √+ | √+ | | | | | | | | √ | | | | |
| HT-5 | | | √+ | √ | √+ | | | | | | | | √ | | | | |
| S1PW* | | | √ | √ | | √+ | √ | | | | √+ | | √ | | | | |
| S1HB | | | √ | √ | | √+ | √ | | | | | | √ | | | | |
| S2 | | | √+ | √+ | √ | √+ | √ | | | | √ | √+ | √ | | | | |
| SD4i | | | √+ | √+ | √ | √+ | √ | | √ | √ | | | | | | | |
| S4+ | | | | | | √+ | √+ | | √ | √ | | | | | | | |
| S5 | | | | | | √+ | √ | | | √+ | | | | | | | |
| BX1 | | | | | | | | | | | | | √ | √+ | √ | √ | |
| I BX1 / I BX1 RC | | | | | | | | | | | | | √ | √+ | √ | √+ | |
| BX2 | | | | | | | | | | | | | √+ | √ | √ | √ | |
| BX5 | | | | | | | | | | | | | √+ | √ | √ | √ | |
| MX1 | | | | | | | | | | | | | √ | √ | √+ | √+ | |
| MX FG/MX2 | | | | | | | | | | | | | √ | √ | √+ | √+ | √ |

*S1PW has NSF61 certification.

Concrete Coating Solutions

- Moderate Chemical
- Severe Chemical

| | Pitching Grout | Grading Grout | Chemical Process Spill Areas | Machine/Mechanical Room Floors | Clean Room Floors | Plating Rooms | Traffic Aisles | Food Processing/Packaging | Interior Chemical Containment | Exterior Chemical Containment | Floor Drains | Battery Charger Rooms | Locker/Shower Rooms | Broadcastable, Non-Slip Surfaces | Bottling Lines | Pump Bases | Fabrication/Manufacturing Floors | Manholes/Septic Systems | |
|----------------|----------------|---------------|------------------------------|--------------------------------|-------------------|---------------|----------------|---------------------------|-------------------------------|-------------------------------|--------------|-----------------------|---------------------|----------------------------------|----------------|------------|----------------------------------|-------------------------|---|
| 797 | √+ | √+ | | | | | | | | | | | | √+ | | | | | |
| EG-1 / EG-1 FC | √+ | √+ | | √ | | | √+ | | | | | | | | | √+ | √+ | | |
| 791** | √+ | √+ | √+ | √ | | √+ | √ | √ | √+ | √+ | √+ | √+ | | | √+ | √+ | √+ | √+ | |
| 988** | | | √+ | √+ | | √+ | √ | √ | √+ | √+ | √+ | √+ | | | | √+ | √+ | | |
| CS2*** | | | √+ | √+ | √ | √+ | √ | √ | √+ | √ | √+ | √+ | √ | √ | √ | √+ | √ | √ | √ |
| CS4*** | | | √+ | √+ | √+ | √+ | | √+ | √+ | √+ | √+ | √+ | √+ | √+ | √+ | √+ | √+ | √+ | |

**Resurfacing coatings for mechanical and chemical exposures

***Thin film coatings for chemical protection

√+ = Best Choice √ = Good Choice



EROSION RESISTANT COATINGS FOR METAL

ARC 855

Abrasion Control Liquid

100% solids, ceramic reinforced, thin film coating to protect metal against chemicals, abrasion, and corrosion.

Product Characteristics


- Low surface energy for improved flow characteristics
- Reinforced with SiC powders for improved erosion resistance
- Comes in black and gray for two coat verification

Applications

- Pump casings and impellers
- Fans and housings
- Bins/silos
- HVAC systems
- Pitted tanks and pipes
- Heat exchangers
- Valves

Technical Data

| | |
|--|--------------------------|
| Dry Temperature (Max) | 120°C (250°F) |
| Wet Temperature (Max) | 65°C (150°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 352 – 34.6 (5,020) |
| Available Sizes | 0.75 l, 1.5 l, 5 l, 16 l |

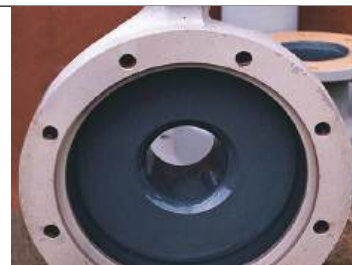

- Upgrade new and old equipment exposed to abrasion, corrosion or chemical attack
- Replace traditional coatings, special alloys, engineered plastics, ceramics, etc.
- Easily apply by roller or brush

ARC 858

Abrasion Control Compound

An advanced, trowelable, ceramic composite for the repair and protection of all metal surfaces subjected to erosion, corrosion, and chemical attack.

Product Characteristics

- Applied by trowel or spatula
- Normally applied at a thickness of 1.5 mm (60 mils) or more
- Meets Milspec 24276 B "Hull smoothing and faring compound"

Applications

- Pump casings and impellers
- Fans and housings
- Pipe elbows
- Screws
- Pitted tanks and pipes
- Heat exchangers
- Valves

Technical Data

| | |
|--|---|
| Dry Temperature (Max) | 160°C (320°F) |
| Wet Temperature (Max) | 70°C (160°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 478.5 – 47 (6810) |
| Available Sizes | 0.25 kg, 940 ml (cartridge), 0.75 l, 1.5 l, 5 l, 16 l |



- Rebuilds damaged equipment
- Repairs and smooths pitted surfaces
- Able to be top-coated with other ARC Composites



COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

ARC S4+

100% Solids, Mineral-Reinforced, Epoxy Novolac, Acid-Resistant Coating

An advanced, liquid, polymer coating formulated to protect equipment from extreme chemical attack and corrosion.

Product Characteristics

- Two-coat system
- Easily applied by spray, brush, or roller
- Minimum thickness of 375 µm (15 mils) per coat

Applications

- Chemical storage tanks
- Chimneys and stacks
- Exhaust gas ductwork
- Fans and housings
- Heat exchangers
- Tank linings
- Structural steel

Technical Data

| | |
|--|--------------------------------|
| Dry Temperature (Max) | 150°C (300°F) |
| Wet Temperature (Max) | 60°C (140°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 330 – 32.4 (4700) |
| Available Sizes | 1125 ml (cartridge), 5 l, 16 l |



- Provides long-term protection
- Low permeability for immersion conditions
- Sprayable viscosity for rapid installation
- Spark testable for pinhole-free verification

ARC HT-S

Spark-Testable, High-Temperature, Sprayable, Erosion- Control Liquid

Advanced ceramic composites that are formulated to protect equipment from corrosion and erosion in elevated temperature immersion of aqueous solutions.

Product Characteristics

- Easily applied by spray, brush, or roller
- Minimum thickness of 250 µm (10 mils) per coat
- Available in gray and blue

Applications

- Hydrocyclones
- Heat exchangers
- Pump volutes and impellers
- Condensate pumps
- Tanks
- Valves
- Offshore equipment

Technical Data

| | |
|--|-------------------|
| Dry Temperature (Max) | 175°C (347°F) |
| Wet Temperature (Max) | 150°C (302°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 365 – 35.9 (5200) |
| Available Sizes | 5 l, 16 l |



- Extends equipment life
- Spark testable for pinhole-free verification
- Reduces downtime
- Cures in service



COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

ARC S5

Corrosion Protection in High-Temperature Immersion

Sprayable coating for extreme high-temperature immersion up to 180°C (356°F). Ideal for elevated temperature process vessels and equipment exposed to heated fluids where high temperature differentials may exist.

Product Characteristics

- Performs in immersed aqueous solution conditions up to 180°C (356°F)
- Replaces exotic alloys, engineered plastics, ceramics, and conventional coatings
- Easily applied by roller, brush, squeegee, or airless spray

Applications

- Transport oil pipelines
- Separators
- Deaerators
- Fans and housings
- Ducting
- Tanks and vessels
- Heat exchangers
- Pumps and valves



- Spark testable per NACE SP018
- Passes NACE TM0185 at 180°C (356°F)
- Permeation resistant

Technical Data

| | |
|--|---------------------|
| Dry Temperature (Max) | 210°C (410°F) |
| Wet Temperature (Max) | 180°C (356°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 365.4 – 35.9 (3500) |
| Available Sizes | 5 l, 16 l |

ARC S2

Ceramic-Reinforced, Sprayable, Erosion-Resistant Coating

An advanced, liquid, ceramic-reinforced coating for the protection of all metal surfaces subject to erosive, corrosive, and severe fluid flow conditions.

Product Characteristics

- Two-coat system
- Applied via conventional airless spray systems, brush, or roller
- Wet film thickness of 0.25 – 0.5 mm (10 – 20 mils) per coat

Applications

- Flue gas ducts
- Heat exchangers
- Quench zones
- Flue gas particulate filters
- Chemical reactors
- Chemical storage and process tanks



- Improves fluid flow efficiency
- Extends equipment life
- Sprayable viscosity for rapid installation
- Spark testable for pinhole-free verification

Technical Data

| | |
|--|---------------------------------------|
| Dry Temperature (Max) | 80°C (175°F) |
| Wet Temperature (Max) | 52°C (125°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 463 – 45.5 (6590) |
| Salt Fog | >20000 hrs |
| Available Sizes | 1125 ml (cartridge), 1.5 l, 5 l, 16 l |



COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

ARC S1PW

General Purpose, Sprayable, Corrosion Protection Coating


An advanced, ceramic-reinforced liquid composite formulated to protect metal surfaces from erosion, corrosion, and mild chemical attack.

Product Characteristics

- Two-coat system
- Easily applied by spray, brush, or roller
- Minimum thickness of 250 µm (10 mils) per coat
- Approved to NSF Std 61 for drinking water

Applications

- Structural steel
- Cooling water systems
- Pipeline coatings
- Service water systems
- Wastewater structures
- Tanks

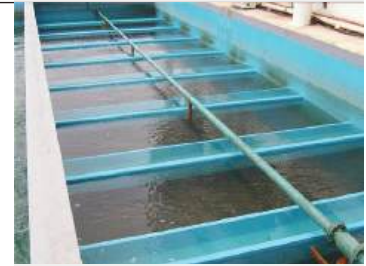

- Low permeability provides long-term protection
- Spark testable for pinhole-free verification
- Sprayable viscosity for rapid installation

Technical Data

| | |
|--|------------------------------------|
| Dry Temperature (Max) | 62°C (144°F) |
| Wet Temperature (Max) | 52°C (126°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 477 – 46.8 (6790) |
| Salt Fog | >10000 hrs |
| Available Sizes | 1125 ml (cartridge), 5 l, and 16 l |

ARC S1HB

High Build, Single Coat, Edge-Retentive Barrier Coating

ARC S1HB is a mineral reinforced, amidoamine cured modified epoxy lining for the protection of metallic and cementitious surfaces from corrosive exposures. Its high build, edge-retentive nature provides maximum coverage over hard 90° edges and corners with minimal thinning at the sharp edge.

Product Characteristics

- Provides excellent barrier protection against corrosion and chemical attack
- Provides resistance to erosive flow
- High build (1 – 2 mm/ 40 – 80 mils) coating designed for rough surfaces
- Easily applied by heated plural component spray with brush application for touch-up
- UV sensitive pigment for QC inspection

Applications

- Crude oil storage tanks
- Chemical storage tanks
- Thickener tanks
- Pipelines/penstocks
- Wastewater clarifiers
- Grit chambers
- Wet wells/junction boxes
- Manholes
- Acceptable for use with cathodic protection systems



- Greater than 70% edge retention
- 100% solids
- Low VOCs

Technical Data

| | |
|--|--|
| Dry Temperature (Max) | 80°C (175°F) |
| Wet Temperature (Max) | 52°C (125°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | Metal: 309 – >30 (4400) Concrete: 28 – >2.7 (400) |
| Salt Fog | >10000 hrs |
| Available Sizes | 1125 ml (cartridge), 60 l kit* |

*51 l and 480 l replace 60 l kits in EMEA

COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL



ARC SD4i

High-Temperature Ceramic-Reinforced Erosion-Resistant Coating


100% solids, advanced reinforced thin film coating to protect structures and equipment in extreme immersion services.

Product Characteristics

- Erosion-resistant surface
- 100% solids, no VOCs
- Low viscosity, thin film
- Brush, roller and spray applied

Applications

- Flotation cells
- Heat exchangers
- Hoppers
- Hydrocyclones
- Bins and silos
- Deaerators
- Thickener tanks
- Slurry tanks
- Slurry pipes

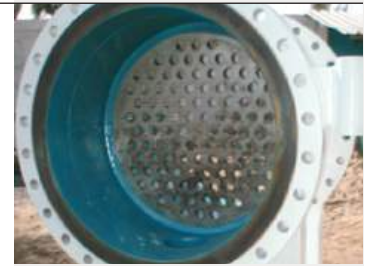

| Technical Data | |
|--|------------------------------------|
| Dry Temperature (Max) | 120°C (248°F) |
| Wet Temperature (Max) | 65°C (149°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 241 – 23.7 (3430) |
| Taber Abrasion (ASTM D4060) H-18/1000 cycles/1 kg load | 26 mg loss |
| Available Sizes | 1125 ml (cartridge), 5 l, and 16 l |

- Protect against corrosion and erosion
- Provide extended protection in aggressive chemical immersion services
- Apply by brush, roller, airless, or plural component spraying



ABRASION RESISTANT COMPOSITES FOR METAL

ARC BX5

Rapid-Curing, Trowel-Grade Coating for Fine-Particle Moderate Sliding Wear

Rapid curing, 100% solids, ceramic-reinforced, multi-component system, formulated for moderate sliding-wear and abrasion caused by fine particles.



Product Characteristics

- Cure under adverse conditions with maximum adhesion
- Quickly patch and repair worn equipment and structures
- Easily apply by trowel

Applications

- Pneumatic conveyors
- Chipper and chip bins
- Turbo separators
- Ni-hard slurry pumps
- Fly ash separators
- Cyclones and hoppers
- Transport fans
- Hydro pulpers
- Wear plates
- Pipe elbows
- Pulverizers
- Screw conveyors

- Surface tolerant
- Greater than 60% ceramic reinforcement
- High adhesion

Technical Data

| | |
|---|-------------------|
| Dry Temperature (Max) | 120°C (248°F) |
| Wet Temperature (Max) | 60°C (140°F) |
| Tensile Adhesion (ASTM D638) - kg/cm ² - MPa (psi) | 224 – 22.1 (3200) |
| Available Sizes | 0.75 l, 2.5 l |
| Colors | Red* and gray |

*RED not available in EMEA.

Product Case Study

Challenge

Issue

Loss of ceramic tile results in abrasion and corrosion damage to structural steel requiring weld patching every 12 – 14 days. Maintenance shutdowns (12 hrs) allow for partial patching.

Goal

- Find reliable solution to extend operating interval to >6 months
- Solution must allow fast return to service

Root Cause

Failure of brittle ceramic tiles due to impact of coal particles as large as 4" (10 cm) diameter.

Solution

Preparation

- Exposed metal was patch welded
- Grit blast to Sa 2.5 with 3 mil (75 µm) angular profile

Application

1. Apply **ARC BX5** @ 120 – 200 mil (3 – 5 mm) to steel and butting up to ceramic tile
2. Total repair was completed in <12 hours

Results

Client Report

- Life of ceramic tile: 4 – 6 months
- Life of patch weld repair: <4 weeks
- **Life of ARC BX5 repair: >7 months**

Estimated Savings

Due to the success of this application the customer adopted ARC Coatings as the emergency "patch repair" for all tile-lined chutes and lines.



Failure of tile-lined chute after four months prior to patch weld.



Application of **ARC BX5**



ARC BX5 after 7 months



ABRASION RESISTANT COMPOSITES FOR METAL

ARC I BX1

Impact- and Wear-Resistant Epoxy Composite


ARC I BX1 is a urethane modified amine cured epoxy coating highly reinforced with ceramic beads and flakes for resistance to severe sliding abrasion where impact forces or rapid vibration is a concern.

Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at minimum thickness of 6 mm (1/4") or more

Applications

- Hoppers and chutes
- Slurry pumps
- Pipes and pipe elbows
- Pneumatic conveyors
- Pulverizers and impact zones



- High impact resistance
- Reduces the need for spare parts
- Simplifies maintenance procedures
- Extends equipment life
- Improves safety by reducing hotwork

Technical Data

| | |
|--|---------------------------------------|
| Dry Temperature (Max) | 205°C (400°F) |
| Wet Temperature (Max) | 95°C (205°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 222.7 – 21.9 (3170) |
| Available Sizes | 12 kg, 24 x 12 kg (EMEA - 20 kg only) |

ARC I BX1 RC*

Rapid-Curing, Trowel-Grade Coating for Coarse Particle Severe Sliding Wear with Impact

A rapid-curing high impact-resistant, 100% solids, epoxy/urethane hybrid with ceramic reinforcements for severe wear regions and impact.

Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at minimum thickness of 6 mm (1/4") or more
- Cures to functional state in less than 4 hours

Applications

- Rubber pump liners
- Slurry pump cutwaters
- Rubber-lined agitators
- FD/ID fan housings
- Vibrating screen decks
- Discharge plates
- Pipe elbows
- Tile-lined chutes
- Pulverized fuel lines



- Bonds to metal, concrete, ceramic, and many plastics
- High impact resistance
- Simplifies maintenance procedures

Technical Data

| | |
|--|---------------------|
| Dry Temperature (Max) | 205°C (400°F) |
| Wet Temperature (Max) | 95°C (203°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 238.2 – 23.4 (3390) |
| Available Sizes | 2.5 l |

*Product is not available in EMEA



ABRASION RESISTANT COMPOSITES FOR METAL

ARC BX1

Coarse Grade, Sliding Wear Compound

Advanced, ceramic-reinforced composites for the repair and protection of all metal surfaces subjected to severe abrasion and erosion/corrosion.

Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at a minimum thickness of 6 mm (1/4") or more
- Approved to NSF Std 61 for drinking water

Applications

- Separators and cyclones
- Hoppers/chutes
- Coal pulverizers
- Hydro pulpers
- Wear plates
- Slurry pumps
- Pipe elbows
- Pulverized fuel lines
- Screws



- Reduces the need for spare parts
- Simplifies maintenance procedures
- Extends equipment life
- Improves safety by reducing hotwork

Technical Data

| | |
|--|--|
| Dry Temperature (Max) | 205°C (400°F) |
| Wet Temperature (Max) | 95°C (205°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 238 – 23.5 (3400) |
| Available Sizes | 1.5 l, 12 kg, 24 x 12 kg, (EMEA - 20 kg) |

ARC BX2

Fine Grade, Sliding Wear Compound

Advanced, ceramic-reinforced composites for the repair and protection of all metal surfaces subjected to severe abrasion and erosion/corrosion.

Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at a minimum thickness of 3 mm (1/8") or more

Applications

- Separators and cyclones
- Hoppers/chutes
- Coal pulverizers
- Hydro pulpers
- Wear plates
- Slurry pumps
- Pipe elbows
- Pulverized fuel lines
- Screws



- Reduces the need for spare parts
- Simplifies maintenance procedures
- Extends equipment life
- Improves safety by reducing hotwork

Technical Data

| | |
|--|--|
| Dry Temperature (Max) | 205°C (400°F) |
| Wet Temperature (Max) | 95°C (205°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 238 – 23.4 (3390) |
| Available Sizes | 1.5 l, 12 kg, 24 x 12 kg, (EMEA - 20 kg) |
| Colors | Gray |

*Red not available in EMEA



ABRASION RESISTANT COMPOSITES FOR METAL

ARC MX1

Trowel-Grade Coating for Coarse Particle Extreme Sliding Wear and Impact

100% solids, ceramic-reinforced, multi-component system, formulated for extreme impact, sliding-wear abrasion, and impact caused by medium-to-coarse particle flow.

Product Characteristics

- >90% by weight ceramic reinforcement
- 100% solids; no VOCs; no free isocyanates
- Novel toughened polymer matrix for improved impact resistance

Applications

- Pulverizers
- Dredge pumps
- Hoppers and silos
- Conveyor screws
- Pumps and pipe elbows
- Fans/blowers/cyclones
- Slurry pipelines and pumps
- Ceramic tile deflector hoods
- Fan housings
- Ceramic tile-lined chutes
- Rubber-lined deflector hoods



- Protects surfaces against dry coarse particle erosion, wet slurry abrasion, and impact
- Provides a longer lasting alternative to rubber linings and ceramic wear tiles
- Restores worn equipment to near original condition
- Replaces hard alloy blends as wear-resistant material
- Easily apply by trowel

Technical Data

| | |
|--|---------------------|
| Dry Temperature (Max) | 205°C (400°F) |
| Wet Temperature (Max) | 95°C (203°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 224.8 – 22.1 (4200) |
| Available Sizes | 6 kg, 20 kg |

ARC MX2

Trowel-Grade Coating for Fine Particle Severe Sliding Wear

100% solids, ceramic-reinforced, multi-component system, formulated for extreme sliding wear and abrasion caused by fine particles.

Product Characteristics

- Easily apply by trowel
- Applied up to 6 mm (1/4") without sag
- Bright white
- No primer required

Applications

- Cyclones
- Valves
- Hopper bins
- Pulp dewatering screws
- Wear plates
- Slurry pumps
- Agitators
- Mixers
- Cleaner cones
- Pipe spools
- Pulverizers



- 92% pure alumina ceramic reinforcement yields maximum hardness and abrasion resistance
- Preferred for slurries or particle flow with particulates less than 3 mm (1/8") in size

Technical Data

| | |
|--|---------------------|
| Dry Temperature (Max) | 205°C (400°F) |
| Wet Temperature (Max) | 95°C (203°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 238.9 – 23.5 (3400) |
| Available Sizes | 2.5 l, 16 l |



ABRASION RESISTANT COMPOSITES FOR METAL

ARC MX FG

Abrasion Resistant Coating for Fine Particle Wear

ARC MX FG is a trowel applied 100% solids, alumina ceramic reinforced epoxy wear compound formulated for extreme fine particle wear under dry and wet slurry flow conditions.



Product Characteristics

- Protects metal surfaces from extreme sliding-wear and abrasion caused by fine particles
- Restores worn equipment to near original condition
- Provides a longer lasting alternative to rubber linings and ceramic wear tiles
- Extends life of equipment exposed to fine particle wear
- Resists a broad pH spectrum
- Applies easily by trowel

Applications

- Cyclones
- Valves
- Hopper bins
- Transport screws
- Wear plates
- Slurry pumps
- Agitators
- Mixers
- Cleaner cones
- Pipe spools
- Pipe elbows
- Pulverizers

- Tough, ceramic-reinforced coating that resists broad range of slurries
- Complies with 21 CFR 175.300 for direct food contact as follows:
 - **Type II** – Acidic (pH 5.0 or below), aqueous products; may contain salt or sugar or both, including oil-in-water emulsions of low or high fat content food.
 - **Type III** – Aqueous, acid or non-acid products containing free oil or fat; may contain salt, and including water-in-oil emulsions of low or high fat content.
 - **Type IVA** – Dairy products and modifications: Water in oil emulsion, high or low fat.
 - **Type IVB** – Dairy products and modifications: Oil in water emulsion, high or low fat.
 - **Type V** – Low moisture fats and oils, Condition C.
 - **Type VIII** – Dry solid foods.

Technical Data

| | |
|--|------------------------|
| Dry Temperature (Max) | 177°C (350°F) |
| Wet Temperature (Max) | 77°C (170°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | >211 - 20.7 (3000 psi) |
| Available Sizes | 5 l |

RESURFACING COATINGS FOR CONCRETE

ARC EG-1/EG-1 FC*

Fast-Setting Grout Resurfacer to Repair/Patch Concrete Surfaces

Use ARC EG-1 / EG-1 FC to resurface damaged concrete surfaces quickly, including voids up to 30 cm (12 inches). ARC EG-1 / EG-1 FC bond to damp or dry concrete, set fast, and can be rapidly coated within 4 hours with other ARC coatings for improved chemical or mechanical protection.

ARC EG-1 / EG-1 FC are 100% solids, three-part grout that use a low viscosity, moisture-tolerant epoxy chemistry that is reinforced with a dried blend of graded and pigmented silica aggregates.



Product Characteristics

- Resurfaces concrete damaged by a chemical attack or mechanical stress
- Fills voids prior to topcoating
- Bonds to damp concrete
- Sets fast, allowing rapid overcoating
- Applies easily by trowel

Applications

- Fill spalled areas
- Build up low areas
- Form curbs and pads
- Patch machinery footprint damage
- Create slopes to drains

- No primer required
- Excellent for pitching and grading compound
- Accepts topcoat four hours after application

Technical Data

| | |
|--|--------------------------------------|
| Wet Immersion (Continuous) | 66°C (150°F) |
| Wet Immersion (Intermittent) | 93°C (200°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | >35.1 – >3.4 (>500) concrete failure |
| Available Sizes | EG-1 System Kit, EG-1 FC Patch Kit |

*EG-1 FC is not available in EMEA

RESURFACING COATINGS FOR CONCRETE

ARC 791

100% Solids, Novolac Resin Blend, Trowel-Applied, Quartz-Reinforced Concrete, High-Build Concrete Coating

A quartz-reinforced composite that is designed to resurface and restore concrete surfaces, to protect new concrete and to repair concrete damaged by chemical and physical abuse.



Product Characteristics

- Trowelable overlayment
- Applied at minimum thickness of 6 mm (1/4")
- Can be applied to damp and vertical surfaces
- Non-shrinking, no solvents, 100% solids

Applications

- Chemical containment
- Floor drains and sumps
- Process floor
- Equipment bedding
- Pump bases/grouting
- Structural support columns

- Low maintenance overlayment
- Provides long-term protection
- Avoids costly structural rebuild
- Non-sagging: easily applied to vertical surfaces

Technical Data

| | |
|---|--------------------------------------|
| Dry Temperature (Max) | 93°C (200°F) |
| Wet Temperature (Max) | 66°C (150°F) |
| Compressive Strength (ASTM C579) - kg/cm ² - MPa (psi) | 655 – 64.2 (9320) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | >35.1 – >3.4 (>500) concrete failure |
| Available Sizes | System Kit, Bulk Kit |

Product Case Study

Challenge

Issue

- Repair screws and troughs of effluent pumps to return system to specified productivity
- Eliminate waste hang-ups and excessive energy draw

Root Cause

Acidic stock waste had corroded the concrete pump sleeves, causing loss of pump efficiency. Three pumps were required to handle waste stream.

Solution

Preparation

Concrete was grit blasted and rebuilt with rapid set acrylic modified concrete.

Application

1. Prime with **ARC 797** to promote adhesion
2. Apply **ARC 791** and finish
3. Note: Screws were reinstalled 18 hours after application of coatings

Results

Client Reported One Year After Repair

- Effluent movement improved
- Plant reduced operation to 1 pump
- Plant reports 66% electricity savings



Three effluent pumps in operation prior to repair



ARC 791 applied to properly prepared surfaces



All three pump troughs coated with ARC 791



RESURFACING COATINGS FOR CONCRETE

ARC 988

Highly Chemically Resistant, 100% Solids, Pure Novolac Resin-Based, Trowel Applied, Quartz-Reinforced Concrete, High-Build Concrete Coating

A high performance, quartz-reinforced composite that is designed to resurface and restore concrete surfaces, to protect new concrete, and to repair concrete damaged by severe chemical and physical abuse.

Product Characteristics

- Trowelable overlayment
- Applied at minimum thickness of 6 mm (1/4")
- Can be applied to damp concrete
- Non-shrinking, no solvents, 100% solids
- Colors: Gray, Red

Applications

- Chemical containments
- Equipment bases
- Secondary containment areas
- Sumps, trenches, and neutralization tanks

Technical Data

| | |
|---|--|
| Dry Temperature (Max) | 93°C (200°F) |
| Wet Temperature (Max) | 65°C (150°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | Greater than 35.1 – 3.4 (500) concrete failure |
| Compressive Strength (ASTM C579) - kg/cm ² - MPa (psi) | 1000 – 97.9 (14200) |
| Available Sizes | System Kit, Bulk Kit |



- Low maintenance overlayment
- Provides long-term protection
- Avoids costly structural rebuild
- Reduces safety hazard caused by damaged concrete
- Easily applied to vertical surfaces/non-sagging

THIN FILM COMPOSITES FOR CONCRETE

ARC 797

Fast-Penetrating, Modified-Epoxy Primer/Sealer

797 is used as a primer for applications involving CS2 and CS4 as well as 791 and 988 which can also be used in a multi-coat application as a concrete sealer.

Product Characteristics

- Low mixed viscosity
- 100% solids; low VOC's; no free isocyanates
- Can be applied to damp concrete
- Promotes strong adhesion to concrete

Applications

- As a primer:**
- Primarily for ARC 791 and 988
 - Secondarily for CS2 and CS4
- As a sealer:**
- Concrete tanks
 - Secondary containment
 - Water intakes and dams
 - Sumps, drains and pits
 - Process floor areas
 - Pump bases
 - Equipment bases

Technical Data

| | |
|--|--------------------|
| Dry Temperature (Max) | 93°C (200°F) |
| Wet Temperature (Max) | 66°C (150°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 35.1 – >3.4 (>500) |
| Available Sizes | 16 l Kit |



- Bonds to damp concrete
- Penetrates and seals concrete surface layer
- Provides a proper surface for application of other ARC epoxy-based coatings for concrete
- Apply by roller, brush, or airless spray



THIN FILM COMPOSITES FOR CONCRETE

ARC CS2

General Purpose, Thin Film, Novolac Blend, Epoxy Coating

Thin film, advanced composites that are formulated to protect concrete surfaces. CS2 is used for mild chemical attack and CS4 for harsh chemical attack.

Product Characteristics

- Protects new and old concrete surfaces/structures subject to mild chemical and/or physical damage
- Can be broadcast for slip resistant surface finish
- Apply by brush, roller, spray, or squeegee

Applications

- Concrete tanks
- Water intakes and dams
- Secondary containment
- Process floor areas
- Chemical plant floors
- Drainage troughs
- Equipment bases
- Chemical tanks
- Floor drains
- Cooling towers
- Sumps



- Provides long-term protection
- Avoids costly structural rebuild
- Reduces safety hazard caused by damaged concrete

Technical Data

| | |
|---|-------------------|
| Dry Temperature (Max) | 80°C (175°F) |
| Wet Temperature (Max) | 52°C (125°F) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | 35 – 3.4 (500) |
| Compressive Strength (ASTM C579) - kg/cm ² - MPa (psi) | 680 – 66.6 (9650) |
| Available Sizes | 16 l |



THIN FILM COMPOSITES FOR CONCRETE

ARC CS4

Highly Chemically Resistant, 100% Novolac Resin, Epoxy Coating

Thin film, advanced composites that are formulated to protect concrete surfaces. CS2 is used for mild chemical attack and CS4 for harsh chemical attack.

Product Characteristics

- Protects new and old concrete surfaces/ structures subject to harsh chemical and/ or physical damage
- Can be broadcast into for slip resistant surface finish
- Apply by brush, roller, spray, or squeegee

Applications

- Concrete tanks
- Equipment bases
- Process floor areas
- Chemical plant floors
- Drainage troughs
- Secondary containment
- Water intakes and dams
- Chemical tanks
- Cooling towers
- Floor drains
- Sumps



- Provides long-term protection
- Avoids costly structural rebuild
- Reduces safety hazard caused by damaged concrete

Technical Data

| | |
|---|--------------------|
| Dry Temperature (Max) | 80°C (175°F) |
| Wet Temperature (Max) | 40°C (105°F) |
| Compressive Strength (ASTM C579) - kg/cm ² - MPa (psi) | 970 – 95.1 (13750) |
| Tensile Adhesion (ASTM D4541) - kg/cm ² - MPa (psi) | >35.1 – 3.4 (500) |
| Available Sizes | 16 l |

Product Case Study

Challenge

Issue

Severe corrosion to failing acid brick-lined concrete basin resulted in leaks and environmental fines.

Goal

Avoid future fines and return basin to chemical-resistant status.

Root Cause

Sulfuric and hydrochloric acids degrading mortar and grout lines.

Solution

Preparation

- Old acid brick was removed as well as damaged concrete
- Surfaces abrasive grit blasted and alkaline washed

Application

1. Cementitious mortar used to resurface damaged concrete
2. All surfaces coated with two coats of **ARC CS4** at 15 – 20 mil (375 – 500 µm)/coat

Results

Client Reported

- Repairs carried out over a two-week period
- Basin operated for 6+ years before repairs were required

| | |
|---------------------|------------|
| Acid brick estimate | \$ 150,000 |
| ARC lining | \$ 47,000 |
| Savings | \$ 103,000 |

\$ = USD



Basin in petrochemical complex



Surface preparation



ARC CS4 final application

ARC INDUSTRIAL COATINGS ORDERING INFORMATION

ARC METAL COATING SYSTEMS

ARC 855

Abrasion Control Liquid

| | |
|--|--------|
| 0.75 l (1.2 kg) 750 µm (30 mils); 0.98 m ² (10.6 ft ²) | |
| Gray | 084677 |
| Black..... | 084676 |
| 1.5 l (2.45 kg) 750 µm (30 mils); 2.0 m ² (21.5 ft ²) | |
| Gray | 085354 |
| Black..... | 085353 |
| 5 l (8.15 kg) 750 µm (30 mils); 6.67 m ² (71.7 ft ²) | |
| Gray | 085362 |
| Black..... | 085363 |
| 16 l (26.08 kg) 750 µm (30 mils); 21.3 m ² (229.4 ft ²) | |
| Gray | 085406 |
| Black..... | 085405 |

ARC 858

Abrasion Control Compound (P; T; C)*

| | |
|---|---------|
| 0.75 l (1.2 kg); 750 µm (30 mils); 0.98 m ² (10.6 ft ²) | |
| Gray | 085733 |
| 940 ml (1.53 kg); 750 µm (30 mils); 1.3 m ² (13.5 ft ²) | |
| Gray | 0842921 |
| 250 g (QP); 750 µm (30 mils); 0.19 m ² (2.15 ft ²) | |
| Gray | 086194 |
| 1.5 l (2.45 kg); 750 µm (30 mils); 2.0 m ² (21.53 ft ²) | |
| Gray | 085357 |
| 5 l (8.15 kg); 750 µm (30 mils); 6.67 m ² (71.76 ft ²) | |
| Gray | 085364 |
| 16 l (26.08 kg); 750 µm (30 mils); 21.33 m ² (229.63 ft ²) | |
| Gray | 085404 |

ARC HT-S

Spark-Testable, High-Temperature, Sprayable, Erosion-Control Liquid (P; T; C)*

| | |
|---|--------|
| 5 l (8.31kg); 750 µm (30 mils); 6.62 m ² (73.76 ft ²) | |
| Blue..... | 085373 |
| Gray | 085372 |
| 16 l (26.58 kg); 750 µm (30 mils); 21.33 m ² (229.63 ft ²) | |
| Blue..... | 082736 |
| Gray | 082743 |

ARC BX1

Coarse Grade, Sliding Wear Compound (P; T; C)*

| | |
|--|--------|
| 1.5 l (3.66 kg); 6 mm; (240 mils); 0.25 m ² (2.69 ft ²) | |
| Gray | 085593 |
| 12 kg; 6mm (240 mils); 0.9m ² (9 ft ²) | |
| Gray..... | 086490 |
| 24 x 12kg; 6 mm (240 mils); 20m ² (216 ft ²) | |
| Gray | 086959 |

EMEA Only

| | |
|---|----------|
| 20 kg 6 mm (240 mils), 1.45m ² , 15.6 ft ² | |
| Gray..... | 084766EU |
| 12 x 20 kg 6mm (240 mils), 17.4m ² , 187.2 ft ² | |
| Gray..... | 084751EU |

ARC BX2

Fine Grade, Sliding Wear Compound (P; T; C)*

| | |
|--|--------|
| 1.5 l (3.55 kg); 3 mm; (120 mils); 0.50 m ² (5.38 ft ²) | |
| Gray | 085435 |
| 12kg; 3 mm (120 mils); 31.8 m ² (19.4ft ²) | |
| Gray | 086948 |
| 24 x 12 kg; 3 mm (120 mils); 43.3 m ² (465.6 ft ²) | |
| Gray | 086958 |

ARC I BX1

Impact- and Wear-Resistant Epoxy Composite (P; T; C)*

| | |
|--|--------|
| 12 kg; 6 mm (240 mils); 0.9m ² (9 ft ²) | |
| Gray | 086950 |
| 24 x 12 kg; 6 mm (240 mils); 20m ² (216 ft ²) | |
| Gray | 081951 |

EMEA only

| | |
|--|----------|
| 20 kg 6 mm (240 mils), 1.45m ² , 15.6 ft ² | |
| Gray..... | 085395EU |
| 12 x 20 kg 3 mm (240 mils), 17.4m ² , 187.2 ft ² | |
| Gray..... | 085397EU |

ARC I BX1 RC

Rapid-Curing, Trowel-Grade Coating for Coarse Particle Severe

Sliding Wear with Impact (P; T; C)*

| | |
|---|--------|
| 2.5 l (5.9 kg); 6 mm (240 mils); 0.42 m ² (4.5 ft ²) | |
| Brown (Not available in EMEA) | 085379 |

ARC S1 HB

Edge-Retentive High Build Coating(P;T;C)*

| | |
|---|--------|
| 1125 ml (1.57 kg); 375 µm (15 mils); 3 m ² (32.3 ft ²) | |
| Light Gray..... | 085948 |
| 60 l (88 kg); 750 µm (30 mils); 80 m ² (850 ft ²) | |
| Light Gray..... | 088664 |

ARC S1PW

General Purpose, Sprayable, Corrosion Protection Coating (P; T; C)*

| | |
|---|--------|
| 1125 ml (1.78 kg); 375 µm (15 mils); 3 m ² (32.3 ft ²) | |
| Blue..... | 084784 |
| White..... | 084783 |
| 5 l (7.9 kg); 375 µm (15 mils); 13.33 m ² (143.52 ft ²) | |
| Blue..... | 085375 |
| White..... | 085376 |
| 16 l (25.27 kg); 375 µm (15 mils); 42.67 m ² (459.26 ft ²) | |
| Blue..... | 084094 |
| White..... | 084096 |

ARC S2

Ceramic-Reinforced, Sprayable, Erosion-Resistant Coating (P; T; C)*

| | |
|---|--------|
| 1125 ml (1.71 kg); 375 µm (15 mils); 3 m ² (32.3 ft ²) | |
| Gray | 084496 |
| Green | 084495 |
| 1.5 l (2.28 kg); 375 µm (15 mils); 4 m ² (43.06 ft ²) | |
| Gray | 085386 |
| Green | 085387 |
| 5 l (7.60 kg); 375 µm (15 mils); 13.33 m ² (143.52 ft ²) | |
| Gray | 085377 |
| Green | 085378 |
| 16 l (24.33 kg); 375 µm (15 mils); 42.67 m ² (459.26 ft ²) | |
| Gray | 085407 |
| Green | 085408 |

ARC S5

Corrosion Protection in High-Temperature Immersion (P; T; C)*

| | |
|---|--------|
| 5 l (8.74 kg); 375 µm (15 mils); 13.33 m ² (143.5 ft ²) | |
| Light Gray | 085811 |
| Med. Gray | 085812 |
| 16 l (27.98 kg); 375 µm (15 mils); 42.7 m ² (459.3 ft ²) | |
| Light Gray | 085806 |
| Med. Gray | 085807 |

Technical data notes: 1) Coverage values are theoretical, based on no waste factor or surface profile effects. In practice, 10–20% extra product should be added for waste factor assuming brush, roller, or trowel application. 2) Waste factor for products applied by spray could vary significantly depending on spray equipment, substrate geometry, and environmental conditions. 3) All coverage values based on product temperature of 21°C (70°F).

Order numbers apply to US manufactured product.

* P: Pack Size; T: Thickness; C: Coverage; WFT: Wet Film Thickness

ARC INDUSTRIAL COATINGS ORDERING INFORMATION

ARC METAL COATING SYSTEMS

ARC S4+

100% Solids, Mineral-Reinforced, Epoxy Novolac,
Acid-Resistant Coating (P; T; C)*

| | |
|---|--------|
| 1125 ml (1.41 kg); 375 µm (15 mils); 3 m ² (32.3 ft ²) | |
| Gray | 084497 |
| Red | 084498 |
| 5 l (6.30 kg); 375 µm (15 mils); 13.33 m ² (143.52 ft ²) | |
| Gray | 085366 |
| Red | 085365 |
| 16 l (20.14 kg); 375 µm (15 mils); 42.69 m ² (459.26 ft ²) | |
| Gray | 084177 |
| Red | 084178 |

ARC SD4i

High-Temperature Ceramic-Reinforced Erosion-Resistant Coating
(P; T; C)*

| | |
|---|--------|
| 1125 ml (1.98 kg); 375 µm (15 mils); 3 m ² (32.3 ft ²) | |
| Gray | 084263 |
| Blue | 084262 |
| 5 l (8.82 kg); 375 µm (15 mils); 13.33 m ² (143.52 ft ²) | |
| Gray | 085367 |
| Blue | 085368 |
| 16 l (20.14 kg); 375 µm (15 mils); 42.69 m ² (459.26 ft ²) | |
| Gray | 084180 |
| Blue | 084179 |

ARC BX5

Rapid-Curing, Trowel-Grade Coating for Fine-Particle Moderate
Sliding Wear (P; T; C)*

| | |
|--|--------|
| 0.75 l (1.64 kg); 3 mm (120 mils); 0.25 m ² (2.69 ft ²) | |
| Gray | 084672 |
| Red | 085670 |
| 2.5 l (5.44 kg); 3 mm (120 mils); 0.83 m ² (8.97 ft ²) | |
| Gray | 085382 |
| Red | 085673 |

ARC MX1

Trowel-Grade Coating for Coarse Particle Extreme Sliding Wear and
Impact (P; T; C)*

| | |
|---|--------|
| 6 kg; 6 mm (240 mils); 0.37 m ² (4 ft ²) | |
| Blue | 085324 |
| 20 kg; 6 mm (240 mils); 1.23 m ² (13.2 ft ²) | |
| Blue | 085325 |

MX 2

| | |
|--|----------|
| 2.5 liter kit covers 0.83 m ² (8.97 ft ²) | 085374EU |
| 16 liter kit covers 5.33 m ² (57.41 ft ²) | 085402EU |

MX FG

Trowel-Grade Coating for Fine Particle Severe Sliding Wear, FDA
Compliant (P; T; C)*

| | |
|---|--------|
| 5 l (12.4 kg); 3 mm (120 mils); 1.67 m ² (18 ft ²) | |
| White | 085928 |

ARC CONCRETE COATING SYSTEMS

ARC 791

100% Solids, Novolac Resin Blend, Trowel-Applied, Quartz-
Reinforced Concrete, High-Build Concrete Coating (P; T; C)*

| | |
|--|--------|
| Bulk Kit; 6 mm (240 mils); 16.7 m ² (180 ft ²) | |
| Gray | 089537 |
| System Kit; 6 mm (240 mils); 4.1 m ² (44.13 ft ²) | |
| Gray | 082195 |

ARC 797

Fast-Penetrating, Modified-Epoxy Primer/Sealer (P; T; C)*

| | |
|--|--------|
| 16 l (17.9 kg), 25 mm (10 mils) 64 m ² (689 ft ²) | |
| Amber | 085409 |

ARC 988

Highly Chemically Resistant, 100% Solids, Pure Novolac Resin-
Based, Trowel Applied, Quartz-Reinforced Concrete, High-Build
Concrete Coating (P; T; C)*

| | |
|--|--------|
| Bulk Kit; 6 mm (240 mils); 16.7 m ² (180 ft ²) | |
| Gray | 089539 |
| Red | 089540 |
| System Kit; 6 mm (240 mils); 4.1 m ² (44.13 ft ²) | |
| Gray | 082197 |
| Red | 090452 |

ARC CS2

General Purpose, Thin Film, Novolac Blend, Epoxy Coating (P; T; C)*

| | |
|--|--------|
| 16 l (20.73 kg); 500 µm (20 mils); 32 m ² (344.45 ft ²) | |
| Gray | 084186 |

ARC CS4

Highly Chemically Resistant, 100% Novolac Resin, Epoxy Coating
(P; T; C)*

| | |
|--|--------|
| 16 l (19.54 kg); 500 µm (20 mils); 32 m ² (344.45 ft ²) | |
| Red | 084187 |

ARC EG-1/EG-1 FC

Fast-Setting Grout Resurfacer to Repair/Patch Concrete Surfaces
(P; T; C)*

| | |
|---|--------|
| EG-1 System Kit; 18 x 55.8 kg; 12 mm (472 mils); 40.0 m ² (436.0 ft ²) | |
| Gray | 085861 |
| EG-1 FC Patch Kit; 18.5 kg; 12 mm (472 mils); 0.75 m ² (8.10 ft ²) | |
| Gray (Not available in EMEA) | 086295 |
| Red (Not available in EMEA) | 086411 |

Technical data notes: 1) Coverage values are theoretical, based on no waste factor or surface profile effects. In practice, 10–20% extra product should be added for waste factor assuming brush, roller, or trowel application.
2) Waste factor for products applied by spray could vary significantly depending on spray equipment, substrate geometry, and environmental conditions. 3) All coverage values based on product temperature of 21°C (70°F).

Order numbers apply to US manufactured product.

* P: Pack Size; T: Thickness; C: Coverage; WFT: Wet Film Thickness


MECHANICAL SEALS ORDERING INFORMATION

KEY TO SEAL MATERIALS

| Component | Materials | EN12756 | Description |
|------------|--------------|----------------|--|
| Faces | CB | B | Carbon Graphite, Resin Impregnated |
| | SSC | Q ₁ | Silicon Carbide, Sintered Pressureless |
| | RSC | Q ₂ | Silicon Carbide, Reaction Bonded |
| | TC | U ₂ | Tungsten Carbide, Ni-Binder |
| | CR | V | Aluminum Oxide, 99.5% |
| Metals | 316 | G | CrNiMo Steel (1.4401) |
| | Alloy-20 | M ₃ | 20 Cb3 (2.4660) |
| | Ti | T ₂ | Titanium (3.7035) |
| | HC | M ₅ | Hastelloy® C-276 (2.4819) |
| | HB | M ₁ | Hastelloy B2 (2.4617) |
| | Monel® | M ₄ | Monel® Alloy K500 (2.4375) |
| | Duplex | G1 | Duplex Steel (1.4462) |
| | Super Duplex | G4 | Duplex Steel (1.4410) |
| Elastomers | FKM | V | Fluorocarbon |
| | EPDM | E | Ethylene Propylene |
| | FEPM | X | Tetrafluoroethylene-Propylene |
| | FFKM | K ₁ | ChemLast™ 550 |

Monel® is a registered trademark of Special Metals Corporation.

QUICK ORDER REFERENCE EXAMPLE

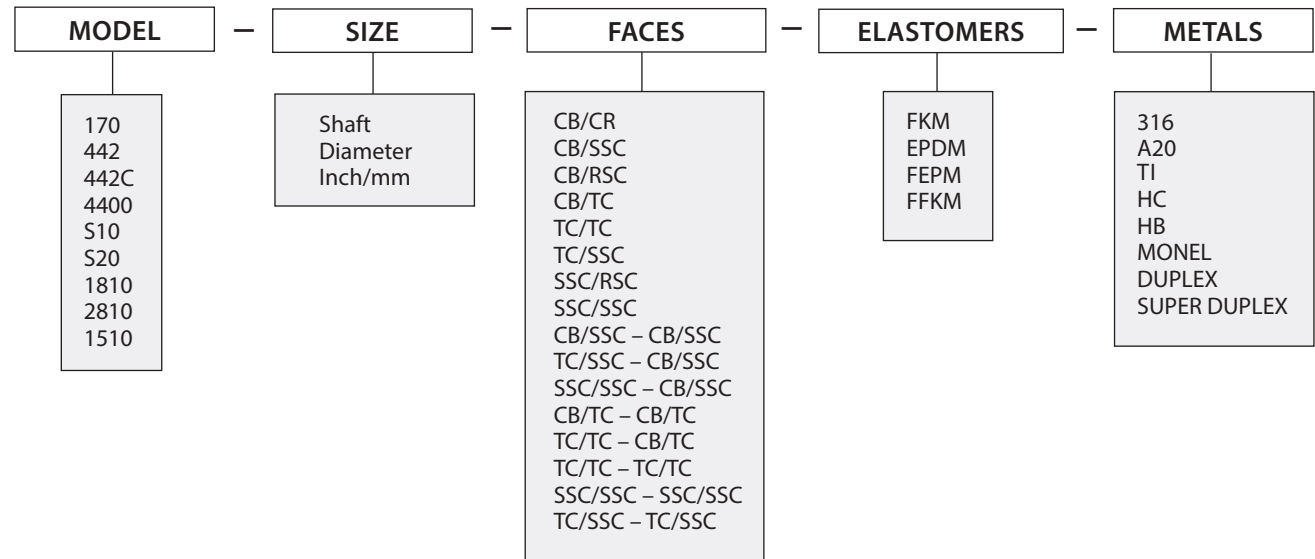

PACKING AND GASKETS ORDERING INFORMATION

Ordering and Certification Information – Packing and Gaskets

| 370 | | | | |
|------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 3.2 | 1/8 | 0.908 | 2 | 037060 |
| 4.7 | 3/16 | 0.908 | 2 | 037062 |
| 6.0 | – | 0.908 | 2 | 037063 |
| 6.4 | 1/4 | 0.908 | 2 | 037064 |
| | | 2.270 | 5 | 037073 |
| 8.0 | 5/16 | 0.908 | 2 | 037065 |
| | | 2.270 | 5 | 037074 |
| 9.5 | 3/8 | 0.908 | 2 | 037066 |
| | | 2.270 | 5 | 037075 |
| | | 4.540 | 10 | 037081 |
| 10.0 | – | 0.908 | 2 | 037067 |
| | | 2.270 | 5 | 037076 |
| 11.0 | 7/16 | 0.908 | 2 | 037068 |
| | | 2.270 | 5 | 037077 |
| 12.0 | – | 2.270 | 5 | 037078 |
| | | 0.908 | 2 | 037070 |
| 12.5 | 1/2 | 0.908 | 2 | 037070 |
| | | 2.270 | 5 | 037079 |
| | | 4.540 | 10 | 037083 |
| 14.0 | 9/16 | 2.270 | 5 | 037080 |
| 16.0 | 5/8 | 4.540 | 10 | 037085 |
| 17.5 | 11/16 | 4.540 | 10 | 037086 |
| 19.0 | 3/4 | 4.540 | 10 | 037087 |
| 22.0 | 7/8 | 4.540 | 10 | 037089 |
| 25.5 | 1 | 4.540 | 10 | 037094 |
| 38.0 | 1–1/2 | 4.540 | 10 | 037022 |

| 377 | | | | |
|-------|-------|--|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 9.52 | 0.375 | 2.27 | 5 | 419768 |
| 9.52 | 0.375 | 4.54 | 10 | 419769 |
| 10 | 0.394 | 2.27 | 5 | 419753 |
| 10 | 0.394 | 4.54 | 10 | 419754 |
| 11.1 | 0.437 | 2.27 | 5 | 419755 |
| 11.1 | 0.437 | 4.54 | 10 | 419756 |
| 12* | 0.472 | 2.27 | 5 | 419757 |
| 12* | 0.472 | 4.54 | 10 | 419758 |
| 12.7 | 0.500 | 2.27 | 5 | 419759 |
| 12.7 | 0.500 | 4.54 | 10 | 419760 |
| 14.3* | 0.562 | 4.54 | 10 | 419761 |
| 16 | 0.625 | 4.54 | 10 | 419762 |
| 17.5* | 0.688 | 4.54 | 10 | 419763 |
| 19 | 0.750 | 4.54 | 10 | 419764 |
| 20 | 0.787 | 4.54 | 10 | 419765 |
| 20.6* | 0.812 | 4.54 | 10 | 423018 |
| 22.2 | 0.875 | 4.54 | 10 | 419766 |
| 23.8* | 0.937 | 4.54 | 10 | 423019 |
| 25* | 1.000 | 4.54 | 10 | 419767 |
| – | 3.000 | 3* Sales Sample Available – Item Number 419344 | | |

| 457 | | | | |
|-----------|------|-------------|---------|-------------|
| Thickness | | Dimensions | | Item Number |
| mm | Inch | M | Inch | |
| 0.4 | 1/64 | 1.52 x 1.52 | 60 x 60 | 003851 |
| 0.8 | 1/32 | 1.52 x 1.52 | 60 x 60 | 003852 |
| 1.6 | 1/16 | 1.52 x 1.52 | 60 x 60 | 003853 |
| 2.4 | 3/32 | 1.52 x 1.52 | 60 x 60 | 003854 |
| 3.2 | 1/8 | 1.52 x 1.52 | 60 x 60 | 003855 |

| 459 | | | | |
|-----------|------|-------------|-------------|-------------|
| Thickness | | Dimensions | | Item Number |
| mm | Inch | M | Inch | |
| 0.8 | 1/32 | 1.00 x 1.00 | 39.4 x 39.4 | 005038 |
| 0.5 | – | 1.00 x 1.00 | 39.4 x 39.4 | 005042 |
| 1.0 | – | 1.00 x 1.00 | 39.4 x 39.4 | 005043 |
| 1.6 | 1/16 | 1.00 x 1.00 | 39.4 x 39.4 | 005039 |
| 2.0 | – | 1.00 x 1.00 | 39.4 x 39.4 | 005044 |
| 3.2 | 1/8 | 1.00 x 1.00 | 39.4 x 39.4 | 005040 |
| 2.4 | 3/32 | 1.00 x 1.00 | 39.4 x 39.4 | 005050 |

| 477-1 | | | | |
|-------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 3.2 | 1/8 | 0.908 | 2 | 004752 |
| 4.7 | 3/16 | 0.908 | 2 | 004754 |
| 6.0 | – | 0.908 | 2 | 004756 |
| 6.4 | 1/4 | 0.908 | 2 | 004730 |
| | | 2.270 | 5 | 004731 |
| 8.0 | 5/16 | 0.908 | 2 | 004733 |
| | | 2.270 | 5 | 004734 |
| 9.5 | 3/8 | 0.908 | 2 | 004722 |
| | | 2.270 | 5 | 004723 |
| | | 4.540 | 10 | 004724 |
| 10.0 | – | 0.908 | 2 | 004758 |
| | | 2.270 | 5 | 004759 |
| 11.0 | 7/16 | 0.908 | 2 | 004736 |
| | | 2.270 | 5 | 004737 |
| 12.0 | – | 0.908 | 2 | 004782 |
| | | 2.270 | 5 | 004791 |
| 12.7 | 1/2 | 0.908 | 2 | 004726 |
| | | 2.270 | 5 | 004727 |
| | | 4.540 | 10 | 004728 |
| 14.0 | 9/16 | 2.270 | 5 | 004739 |
| | | 4.540 | 10 | 004740 |
| 16.0 | 5/8 | 4.540 | 10 | 004742 |
| 17.5 | 11/16 | 4.540 | 10 | 004744 |
| 19.0 | 3/4 | 4.540 | 10 | 004700 |
| 20.5 | 13/16 | 4.540 | 10 | 004793 |
| 22.0 | 7/8 | 4.540 | 10 | 004746 |
| 24.0 | 15/16 | 4.540 | 10 | 004796 |
| 25.5 | 1 | 4.540 | 10 | 004748 |

* Consult Customer Care Team (CCT) on availability and minimum order required for certain cross-sectional sizes that are Made To Order (MTO).

PACKING AND GASKETS ORDERING INFORMATION

| 1600 | | | | |
|------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 3.2 | 1/8 | 0.908 | 2 | 035002 |
| 4.0 | – | 0.908 | 2 | 035004 |
| 4.7 | 3/16 | 0.908 | 2 | 035006 |
| 6.0 | – | 0.908 | 2 | 035008 |
| 6.4 | 1/4 | 0.908 | 2 | 035010 |
| | | 2.270 | 5 | 035011 |
| 8.0 | 5/16 | 0.908 | 2 | 035013 |
| | | 2.270 | 5 | 035014 |
| 9.5 | 3/8 | 0.908 | 2 | 035016 |
| | | 2.270 | 5 | 035017 |
| | | 4.540 | 10 | 035018 |
| 10.0 | – | 0.908 | 2 | 035020 |
| | | 2.270 | 5 | 035021 |
| 11.0 | 7/16 | 0.908 | 2 | 035023 |
| | | 2.270 | 5 | 035024 |
| 12.0 | – | 2.270 | 5 | 035026 |
| 12.7 | 1/2 | 0.908 | 2 | 035028 |
| | | 2.270 | 5 | 035029 |
| | | 4.540 | 10 | 035030 |
| 14.0 | 9/16 | 2.270 | 5 | 035032 |
| | | 4.540 | 10 | 035033 |
| 16.0 | 5/8 | 4.540 | 10 | 035035 |
| 17.5 | 11/16 | 4.540 | 10 | 035037 |
| 19.0 | 3/4 | 4.540 | 10 | 035039 |
| 22.0 | 7/8 | 4.540 | 10 | 035041 |
| 25.4 | 1 | 4.540 | 10 | 034943 |

| 1601 | | | | |
|------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 3.2 | 1/8 | 0.908 | 2 | 034902 |
| 4.0 | – | 0.908 | 2 | 034904 |
| 4.7 | 3/16 | 0.908 | 2 | 034906 |
| 6.0 | – | 0.908 | 2 | 034908 |
| 6.4 | 1/4 | 0.908 | 2 | 034910 |
| | | 2.270 | 5 | 034911 |
| 8.0 | 5/16 | 0.908 | 2 | 034913 |
| | | 2.270 | 5 | 034914 |
| 9.5 | 3/8 | 0.908 | 2 | 034916 |
| | | 2.270 | 5 | 034917 |
| | | 4.540 | 10 | 034918 |
| 10.0 | – | 0.908 | 2 | 034920 |
| | | 2.270 | 5 | 034921 |
| 11.0 | 7/16 | 0.908 | 2 | 034923 |
| | | 2.270 | 5 | 034924 |
| 12.0 | – | 2.270 | 5 | 034926 |
| 12.7 | 1/2 | 0.908 | 2 | 034928 |
| | | 2.270 | 5 | 034929 |
| | | 4.540 | 10 | 034930 |
| 14.0 | 9/16 | 2.270 | 5 | 034932 |
| | | 4.540 | 10 | 034933 |
| 16.0 | 5/8 | 4.540 | 10 | 034935 |
| 17.5 | 11/16 | 4.540 | 10 | 034937 |
| 19.0 | 3/4 | 4.540 | 10 | 034939 |
| 22.0 | 7/8 | 4.540 | 10 | 034941 |
| 25.4 | 1 | 4.540 | 10 | 034943 |

| 1622 | | | | | |
|--------------------|-------|---------------------------------------|-------|---------------------------------|-------------|
| Cross Section Size | | Average Stem Diameter | | Average No. of Valves (per box) | Item Number |
| mm | Inch | mm | Inch | | |
| | 1/8 | | 0.500 | 83 | 054700 |
| | 3/16 | | 0.625 | 59 | 054701 |
| 6.0 | | 25 | | 31 | 054702 |
| 6.4 | 1/4 | | 0.875 | 73 | 054703 |
| 8.0 | 5/16 | | 1.250 | 39 | 054705 |
| 9.5 | 3/8 | | 1.625 | 22 | 054707 |
| 10.0 | | 40 | | 24 | 054711 |
| 11.0 | 7/16 | | 2.000 | 14 | 054713 |
| 12.0 | | 70 | | 9 | 054715 |
| 12.7 | 1/2 | | 2.750 | 8 | 054716 |
| 14.0 | 9/16 | | 3.250 | 6 | 054719 |
| 16.0 | 5/8 | | 4.000 | 4 | 054721 |
| 17.5 | 11/16 | | 5.000 | 3 | 054722 |
| 19.0 | 3/4 | These sizes are available on request. | | | |
| 20.0 | | | | | |
| 22.0 | 7/8 | | | | |
| 25.4 | 1 | | | | |

PACKING AND GASKETS ORDERING INFORMATION

Ordering and Certification Information – Packing and Gaskets

| 1724 | | | | |
|------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 3.2 | 1/8 | 0.908 | 2 | 003260 |
| 4.0 | – | 0.908 | 2 | 003261 |
| 4.7 | 3/16 | 0.908 | 2 | 003262 |
| 6.0 | – | 0.908 | 2 | 003263 |
| 6.4 | 1/4 | 0.908 | 2 | 003264 |
| | | 2.270 | 5 | 003273 |
| 8.0 | 5/16 | 0.908 | 2 | 003265 |
| | | 2.270 | 5 | 003274 |
| 9.5 | 3/8 | 0.908 | 2 | 003266 |
| | | 2.270 | 5 | 003275 |
| | | 4.540 | 10 | 003281 |
| 10.0 | – | 0.908 | 2 | 003267 |
| | | 2.270 | 5 | 003276 |
| 11.0 | 7/16 | 0.908 | 2 | 003268 |
| | | 2.270 | 5 | 003277 |
| 12.0 | – | 0.908 | 2 | 003269 |
| | | 2.270 | 5 | 003278 |
| 12.7 | 1/2 | 0.908 | 2 | 003270 |
| | | 2.270 | 5 | 003279 |
| | | 4.540 | 10 | 003283 |
| 14.0 | 9/16 | 2.270 | 5 | 003280 |
| | | 4.540 | 10 | 003284 |
| 16.0 | 5/8 | 4.540 | 10 | 003285 |
| 17.5 | 11/16 | 4.540 | 10 | 003286 |
| 19.0 | 3/4 | 4.540 | 10 | 003287 |
| 20.5 | 13/16 | 4.540 | 10 | 003288 |
| 22.0 | 7/8 | 4.540 | 10 | 003289 |
| 24.0 | 15/16 | 4.540 | 10 | 003293 |
| 25.4 | 1 | 4.540 | 10 | 003294 |

| 1725A | | | | |
|-------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 6.4 | 1/4 | 0.908 | 2 | 041020 |
| | | 2.270 | 5 | 041027 |
| 8.0 | 5/16 | 0.908 | 2 | 041029 |
| | | 2.270 | 5 | 041030 |
| 9.5 | 3/8 | 0.908 | 2 | 041031 |
| | | 2.270 | 5 | 041033 |
| 10.0 | – | 0.908 | 2 | 041038 |
| | | 2.270 | 5 | 041044 |
| 11.0 | 7/16 | 2.270 | 5 | 041046 |
| 12.0 | – | 2.270 | 5 | 041048 |
| 12.7 | 1/2 | 0.908 | 2 | 041049 |
| | | 2.270 | 5 | 041050 |
| | | 4.540 | 10 | 041051 |
| 14.0 | 9/16 | 2.270 | 5 | 041052 |
| 16.0 | 5/8 | 4.540 | 10 | 041053 |
| 19.0 | 3/4 | 4.540 | 10 | 041074 |
| 20.5 | 13/16 | 4.540 | 10 | 041075 |
| 22.0 | 7/8 | 4.540 | 10 | 041076 |
| 25.4 | 1 | 4.540 | 10 | 041078 |

| 1730 | | | | |
|------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 6.0 | – | 0.908 | 2 | 000637 |
| 6.4 | 1/4 | 0.908 | 2 | 000638 |
| | | 2.270 | 5 | 000691 |
| 8.0 | 5/16 | 0.908 | 2 | 000692 |
| | | 2.270 | 5 | 000693 |
| 9.5 | 3/8 | 2.270 | 5 | 000694 |
| | | 4.540 | 10 | 000695 |
| 10.0 | – | 0.908 | 2 | 000696 |
| | | 2.270 | 5 | 000697 |
| 11.0 | 7/16 | 2.270 | 5 | 000698 |
| 12.0 | – | 0.908 | 2 | 000702 |
| | | 2.270 | 5 | 000703 |
| 12.7 | 1/2 | 2.270 | 5 | 000704 |
| | | 4.540 | 10 | 000705 |
| 14.0 | 9/16 | 2.270 | 5 | 000706 |
| | | 4.540 | 10 | 000932 |
| 16.0 | 5/8 | 4.540 | 10 | 000933 |
| 17.5 | 11/16 | 4.540 | 10 | 000934 |
| 19.0 | 3/4 | 4.540 | 10 | 000935 |
| 20.5 | 13/16 | 4.540 | 10 | 001182 |
| 22.0 | 7/8 | 4.540 | 10 | 001183 |
| 25.4 | 1 | 4.540 | 10 | 001184 |

PACKING AND GASKETS ORDERING INFORMATION

| 1730-SC | | | | |
|---------|-------|---------------|-----|-------------|
| Size | | Packaged ± 5% | | Item Number |
| mm | Inch | kg | lbs | |
| 9.5 | 3/8 | 2.270 | 5 | 003437 |
| | | 4.540 | 10 | 003576 |
| 10.0 | - | 0.908 | 2 | 003577 |
| | | 2.270 | 5 | 003601 |
| 11.0 | 7/16 | 2.270 | 5 | 003659 |
| 12.0 | - | 0.908 | 2 | 003660 |
| | | 2.270 | 5 | 003661 |
| 12.5 | 1/2 | 2.270 | 5 | 003897 |
| | | 4.540 | 10 | 003983 |
| 14.0 | 9/16 | 2.270 | 5 | 003984 |
| | | 4.540 | 10 | 003985 |
| 16.0 | 5/8 | 4.540 | 10 | 003986 |
| 17.5 | 11/16 | 4.540 | 10 | 004059 |
| 19.0 | 3/4 | 4.540 | 10 | 004255 |
| 20.5 | 13/16 | 4.540 | 10 | 004256 |
| 22.0 | 7/8 | 4.540 | 10 | 004272 |
| 25.5 | 1 | 4.540 | 10 | 004276 |

| 1830-SSP | | | | |
|----------|-------|---------------------------------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 8.0 | 5/16 | These sizes are available on request. | | |
| 9.5 | 3/8 | 0.908 | 2 | 052605 |
| | | 2.270 | 5 | 052606 |
| | | 4.540 | 10 | 052607 |
| 10.0 | - | 0.908 | 2 | 052608 |
| | | 2.270 | 5 | 052609 |
| 11.0 | 7/16 | 0.908 | 2 | 052610 |
| | | 2.270 | 5 | 052611 |
| 12.0 | - | 0.908 | 2 | 052612 |
| | | 2.270 | 5 | 052613 |
| 12.5 | 1/2 | 0.908 | 2 | 052614 |
| | | 2.270 | 5 | 052615 |
| | | 4.540 | 10 | 052616 |
| 14.0 | 9/16 | 2.270 | 5 | 052617 |
| | | 4.540 | 10 | 052618 |
| 16.0 | 5/8 | 4.540 | 10 | 052619 |
| 17.5 | 11/16 | 4.540 | 10 | 052620 |
| 19.0 | 3/4 | 4.540 | 10 | 052621 |
| 20.0 | - | 4.540 | 10 | 052622 |
| 20.5 | 13/16 | These sizes are available on request. | | |
| 22.0 | 7/8 | 4.540 | 10 | 052624 |
| 24.0 | 15/16 | 4.540 | 10 | 052625 |
| 25.5 | 1 | 4.540 | 10 | 052626 |

| CMS 2000 | |
|---|-------------|
| Description | Item Number |
| White CMS 2000 Cartridge | 001048 |
| White CMS 2000 Injectable 13.2 liter | 001047 |
| White CMS 2000 Injectable 3.8 liter | 001046 |
| CMS 2000-FP, 1 gallon pail | 127533 |
| CMS 2000-FP, 1 quart pail | 127532 |

PACKING AND GASKETS ORDERING INFORMATION

Ordering and Certification Information – Packing and Gaskets

| DualPac® 2211 | | | | |
|---------------|-------|----------------|-----|-------------|
| Size | | Packaged ± 10% | | Item Number |
| mm | Inch | kg | lbs | |
| 8.0 | 5/16 | 0.908 | 2 | 394368 |
| 9.5 | 3/8 | 0.908 | 2 | 382074 |
| | | 2.270 | 5 | 382075 |
| | | 4.540 | 10 | 382076 |
| 10.0 | - | 0.908 | 2 | 382077 |
| | | 2.270 | 5 | 382078 |
| 11.1 | 7/16 | 0.908 | 2 | 382079 |
| | | 2.270 | 5 | 382080 |
| 12.0 | - | 0.908 | 2 | 382081 |
| | | 2.270 | 5 | 382082 |
| 12.7 | 1/2 | 0.908 | 2 | 382083 |
| | | 2.270 | 5 | 382084 |
| | | 4.540 | 10 | 382085 |
| 14.0 | - | 4.540 | 10 | 382092 |
| 14.3 | 9/16 | 2.270 | 5 | 382086 |
| | | 4.540 | 10 | 382087 |
| 15.9 | 5/8 | 4.540 | 10 | 382088 |
| 17.5 | 11/16 | 4.540 | 10 | 382089 |
| 19.0 | 3/4 | 4.540 | 10 | 382090 |
| 20.0 | - | 4.540 | 10 | 382091 |
| 20.6 | 13/16 | 4.540 | 10 | 382073 |
| 22.2 | 7/8 | 4.540 | 10 | 382093 |
| 24 | 15/16 | 4.540 | 10 | 382094 |
| 25.4 | 1 | 4.540 | 10 | 382095 |

| DualPac® 2212 | | | | |
|---------------|-------|---------|-----|-------------|
| Size | | Package | | Item Number |
| mm | Inch | kg | lbs | |
| 6.4 | 1/4 | 0.908 | 2 | 404539 |
| 8.0 | 5/16 | 0.908 | 2 | 404540 |
| 9.5 | 3/8 | 0.908 | 2 | 395279 |
| | | 2.270 | 5 | 395280 |
| | | 4.540 | 10 | 395281 |
| 10.0 | - | 0.908 | 2 | 395282 |
| | | 4.540 | 5 | 395283 |
| 11.1 | 7/16 | 0.908 | 2 | 395284 |
| | | 2.270 | 5 | 395285 |
| 12.0 | - | 0.908 | 2 | 395286 |
| | | 2.270 | 5 | 395287 |
| 12.7 | 1/2 | 0.908 | 2 | 395288 |
| | | 2.270 | 5 | 395289 |
| | | 4.540 | 10 | 395290 |
| 14.0 | - | 4.540 | 10 | 395291 |
| 14.3 | 9/16 | 2.270 | 5 | 395292 |
| | | 4.540 | 10 | 395293 |
| 16 | 5/8 | 4.540 | 10 | 395295 |
| 17.5 | 11/16 | 4.540 | 10 | 395296 |
| 19.0 | 3/4 | 4.540 | 10 | 395297 |
| 20.0 | - | 4.540 | 10 | 395298 |
| 20.6 | 13/16 | 4.540 | 10 | 395299 |
| 22.2 | 7/8 | 4.540 | 10 | 395300 |
| 24 | 15/16 | 4.540 | 10 | 395301 |
| 25.4 | 1 | 4.540 | 10 | 395303 |

| ECS-T | | | | |
|------------|------|-------------|---------|-------------|
| Thickness | | Dimensions | | Item Number |
| mm | Inch | M | Inch | |
| 0.8 | 1/32 | 1.19 x 1.19 | 47 x 47 | 058109 |
| 1.5 | - | 1.5 x 1.5 | 59 x 59 | 058115 |
| 1.6 | 1/16 | 1.5 x 1.5 | 59 x 59 | 058108 |
| 2.0 | - | 1.5 x 1.5 | 59 x 59 | 058116 |
| 2.4 | 3/32 | 1.5 x 1.5 | 59 x 59 | 058112 |
| 3.2 | 1/8 | 1.5 x 1.5 | 59 x 59 | 058111 |
| FDA Sheets | | | | |
| 0.8 | 1/32 | 1.19 x 1.19 | 47 x 47 | 058132 |
| 1.5 | - | 1.5 x 1.5 | 59 x 59 | 058136 |
| 1.6 | 1/16 | 1.5 x 1.5 | 59 x 59 | 058131 |
| 2.0 | - | 1.5 x 1.5 | 59 x 59 | 058137 |
| 2.4 | 3/32 | 1.5 x 1.5 | 59 x 59 | 058134 |
| 3.2 | 1/8 | 1.5 x 1.5 | 59 x 59 | 058133 |

For ordering information on the 5500, 5505H, or any other Packing products, please refer to the Product Data Sheet (PDS) online.

PACKING AND GASKETS ORDERING INFORMATION

| 5800 | | | |
|---------|---------|---------------|-------------|
| ID Inch | OD Inch | Cross Section | Item Number |
| 0.312 | 0.750 | 0.219 | 009179 |
| 0.375 | 0.750 | 0.187 | 009104 |
| 0.375 | 0.875 | 0.250 | 009107 |
| 0.437 | 0.812 | 0.187 | 008227 |
| 0.437 | 1.125 | 0.344 | 008310 |
| 0.437 | 0.687 | 0.500 | - |
| 0.500 | 0.875 | 0.187 | 009113 |
| 0.500 | 1.000 | 0.250 | 009116 |
| 0.511 | 1.062 | 0.275 | 008312 |
| 0.562 | 1.000 | 0.218 | 053157 |
| 0.625 | 1.000 | 0.187 | 009119 |
| 0.625 | 1.125 | 0.250 | 009149 |
| 0.629 | 1.023 | 0.197 | 008293 |
| 0.750 | 1.125 | 0.187 | 052847 |
| 0.750 | 1.250 | 0.250 | 009122 |
| 0.750 | 1.375 | 0.312 | 009125 |
| 0.750 | 1.500 | 0.375 | 052848 |
| 0.787 | 1.496 | 0.354 | 010409 |
| 0.875 | 1.250 | 0.187 | 008271 |
| 0.875 | 1.375 | 0.250 | 009152 |
| 0.875 | 1.500 | 0.312 | 008300 |
| 0.905 | 1.417 | 0.256 | 052924 |
| 0.937 | 2.312 | 0.687 | 052850 |
| 1.000 | 1.375 | 0.187 | 044749 |
| 1.000 | 1.500 | 0.250 | 009128 |
| 1.000 | 1.625 | 0.312 | 009131 |
| 1.000 | 1.750 | 0.375 | 008237 |
| 1.125 | 1.625 | 0.250 | 009134 |
| 1.125 | 1.750 | 0.312 | 009137 |
| 1.125 | 1.875 | 0.375 | 052968 |
| 1.125 | 2.312 | 0.594 | 052906 |
| 1.125 | 2.375 | 0.625 | 052925 |
| 1.125 | 2.500 | 0.687 | 044753 |
| 1.181 | 1.772 | 0.296 | 052898 |
| 1.181 | 1.811 | 0.315 | 052844 |
| 1.250 | 1.625 | 0.187 | 009188 |
| 1.250 | 1.750 | 0.250 | 009158 |
| 1.250 | 1.912 | 0.331 | 052913 |
| 1.250 | 2.000 | 0.375 | 009143 |
| 1.250 | 2.250 | 0.500 | 052926 |
| 1.250 | 2.625 | 0.687 | 008247 |
| 1.255 | 1.925 | 0.335 | 052927 |
| 1.260 | 1.732 | 0.236 | 044754 |
| 1.375 | 2.000 | 0.312 | 009155 |
| 1.375 | 2.125 | 0.375 | 009164 |
| 1.375 | 2.375 | 0.500 | 052851 |
| 1.500 | 2.000 | 0.250 | 009182 |
| 1.500 | 2.125 | 0.312 | 008250 |

| 5800 (cont.) | | | |
|--------------|---------|---------------|-------------|
| ID Inch | OD Inch | Cross Section | Item Number |
| 1.500 | 2.250 | 0.375 | 009146 |
| 1.500 | 2.281 | 0.390 | 052928 |
| 1.625 | 2.375 | 0.375 | 009700 |
| 1.625 | 2.625 | 0.500 | 052929 |
| 1.750 | 2.250 | 0.250 | 010663 |
| 1.750 | 2.500 | 0.375 | 010408 |
| 1.750 | 2.750 | 0.500 | 044752 |
| 1.875 | 2.500 | 0.312 | 044756 |
| 1.875 | 2.625 | 0.375 | 044748 |
| 2.000 | 2.500 | 0.250 | 009176 |
| 2.000 | 3.000 | 0.500 | 044746 |
| 2.035 | 3.060 | 0.513 | 052893 |
| 2.125 | 3.125 | 0.500 | 052930 |
| 2.125 | 3.155 | 0.515 | 052909 |
| 2.250 | 3.250 | 0.500 | 052879 |
| 2.500 | 3.000 | 0.250 | 008314 |
| 2.500 | 3.250 | 0.375 | 052846 |
| 2.500 | 3.530 | 0.515 | 052915 |
| 2.500 | 3.560 | 0.500 | 052932 |
| 3.000 | 4.000 | 0.500 | 052933 |
| 3.000 | 4.125 | 0.562 | 008301 |

Additional sizes available, please consult with a Chesterton Application Engineer.

| GraphMax™ | | | | |
|-----------|-------|---------------|-----|-------------|
| Size | | Packaged ± 5% | | Item Number |
| mm | Inch | kg | lbs | |
| 9.5 | 3/8 | 0.908 | 2 | 150004 |
| | | 2.270 | 5 | 150005 |
| | | 3.175 | 7 | 150006 |
| 10.0 | - | 0.908 | 2 | 150007 |
| | | 2.270 | 5 | 150008 |
| 11.0 | 7/16 | 0.908 | 2 | 150009 |
| | | 2.270 | 5 | 150010 |
| 12.0 | - | 0.908 | 2 | 150011 |
| | | 2.270 | 5 | 150012 |
| 12.7 | 1/2 | 0.908 | 2 | 150013 |
| | | 2.270 | 5 | 038740 |
| | | 3.175 | 7 | 038741 |
| 14.0 | 9/16 | 2.270 | 5 | 038738 |
| | | 3.175 | 7 | 038744 |
| 16.0 | 5/8 | 3.175 | 7 | 038742 |
| 17.5 | 11/16 | 3.175 | 7 | 150019 |
| 19.0 | 3/4 | 3.175 | 7 | 038743 |
| 20.0 | - | 3.175 | 7 | 150021 |
| 20.5 | 13/16 | 3.175 | 7 | 150022 |
| 22.2 | 7/8 | 3.175 | 7 | 150023 |
| 24.0 | 15/16 | 3.175 | 7 | 150024 |
| 25.4 | 1 | 3.175 | 7 | 150025 |

PACKING AND GASKETS ORDERING INFORMATION

Ordering and Certification Information – Packing and Gaskets

| SuperSet™ Product Item to fit Ahlstrom® APP | | | | |
|---|----------------------------|-----------------|---------------|-------------|
| Bearing Unit | ID x OD x Cross Section mm | Number of Rings | Packing Type | Item Number |
| 1 | 40 x 60 x 10.0 | 2 | 1400R | 210204 |
| | | | 1730 | 210201 |
| | | | 1760 | 210202 |
| | | | 370 | 210203 |
| | | | 477-1T | 210205 |
| | | | DualPac® 2211 | 389777 |
| 2 | 50 x 70 x 10.0 | 2 | 1400R | 210210 |
| | | | 1730 | 210206 |
| | | | 1760 | 210207 |
| | | | 370 | 210209 |
| | | | 477-1T | 210211 |
| | | | DualPac® 2211 | 389778 |
| 3 | 60 x 85 x 12.5 | 2 | 1400R | 210215 |
| | | | 1730 | 210212 |
| | | | 1760 | 210213 |
| | | | 370 | 210214 |
| | | | 477-1T | 210216 |
| | | | DualPac® 2211 | 389779 |
| 4 | 70 x 95 x 12.5 | 2 | 1400R | 210221 |
| | | | 1730 | 210217 |
| | | | 1760 | 210218 |
| | | | 370 | 210219 |
| | | | 477-1T | 210222 |
| | | | DualPac® 2211 | 389780 |
| 5 | 90 x 122 x 16.0 | 2 | 1400R | 210227 |
| | | | 1730 | 210223 |
| | | | 1760 | 210225 |
| | | | 370 | 210226 |
| | | | 477-1T | 210228 |
| | | | DualPac® 2211 | 389781 |
| 6 | 100 x 132 x 16.0 | 2 | 1400R | 210233 |
| | | | 1730 | 210229 |
| | | | 1760 | 210231 |
| | | | 370 | 210232 |
| | | | 477-1T | 210234 |
| | | | DualPac® 2211 | 389782 |

| SuperSet™ Product Item to fit Ahlstrom® APT | | | | |
|---|------------------------------|-----------------|---------------|-------------|
| Bearing Unit | ID x OD x Cross Section Inch | Number of Rings | Packing Type | Item Number |
| 1 | 1.625 x 2.375 x 0.375 | 2 | 1400R | 210239 |
| | | | 1730 | 210236 |
| | | | 1760 | 210237 |
| | | | 370 | 210238 |
| | | | 477-1T | 210241 |
| | | | DualPac® 2211 | 389783 |
| 2 | 2.000 x 2.750 x 0.375 | 2 | 1400R | 210245 |
| | | | 1730 | 210242 |
| | | | 1760 | 210243 |
| | | | 370 | 210244 |
| | | | 477-1T | 210246 |
| | | | DualPac® 2211 | 389784 |
| 3 | 2.375 x 3.375 x 0.500 | 2 | 1400R | 210250 |
| | | | 1730 | 210247 |
| | | | 1760 | 210248 |
| | | | 370 | 210249 |
| | | | 477-1T | 210251 |
| | | | DualPac® 2211 | 389785 |
| 4 | 2.750 x 3.750 x 0.500 | 2 | 1400R | 210255 |
| | | | 1730 | 210252 |
| | | | 1760 | 210253 |
| | | | 370 | 210254 |
| | | | 477-1T | 210257 |
| | | | DualPac® 2211 | 389786 |
| 5 | 3.500 x 4.750 x 0.625 | 2 | 1400R | 210262 |
| | | | 1730 | 210258 |
| | | | 1760 | 210259 |
| | | | 370 | 210261 |
| | | | 477-1T | 210263 |
| | | | DualPac® 2211 | 389787 |
| 6 | 3.937 x 5.197 x 0.625 | 2 | 1400R | 210267 |
| | | | 1730 | 210264 |
| | | | 1760 | 210265 |
| | | | 370 | 210266 |
| | | | 477-1T | 210268 |
| | | | DualPac® 2211 | 389788 |

Ahlstrom® is a registered trademark of Ahlstrom-Munksjö Oyj Public Limited Co.

PACKING AND GASKETS ORDERING INFORMATION

| SuperSet™ Product Item to fit Goulds® | | | | |
|---------------------------------------|------------------------------|-----------------|---------------|-------------|
| Pump Model | ID x OD x Cross Section Inch | Number of Rings | Packing Type | Item Number |
| 3175 L | 4.750 x 5.750 x 0.500 | 3 | 1400R | 210033 |
| | | | 1730 | 210030 |
| | | | 1760 | 210031 |
| | | | 370 | 210032 |
| | | | 477-1T | 210034 |
| | | | DualPac® 2211 | 389789 |
| 3175 M | 3.750 x 4.750 x 0.500 | 3 | 1400R | 210028 |
| | | | 1730 | 210025 |
| | | | 1760 | 210026 |
| | | | 370 | 210027 |
| | | | 477-1T | 210029 |
| | | | DualPac® 2211 | 389790 |
| 3175 S | 3.000 x 4.000 x 0.500 | 3 | 1400R | 210023 |
| | | | 1730 | 210020 |
| | | | 1760 | 210021 |
| | | | 370 | 210022 |
| | | | 477-1T | 210024 |
| | | | DualPac® 2211 | 389791 |
| 3196 LT | 2.125 x 2.875 x 0.375 | 3 | 1400R | 210013 |
| | | | 1730 | 210010 |
| | | | 1760 | 210011 |
| | | | 370 | 210012 |
| | | | 477-1T | 210014 |
| | | | DualPac® 2211 | 389792 |
| 3196 MT | 1.750 x 2.50 x 0.375 | 3 | 1400R | 210008 |
| | | | 1730 | 210005 |
| | | | 1760 | 210006 |
| | | | 370 | 210007 |
| | | | 477-1T | 210009 |
| | | | DualPac® 2211 | 389793 |
| 3196 ST | 1.375 x 2.00 x 0.3125 | 3 | 1400R | 210003 |
| | | | 1730 | 210000 |
| | | | 1760 | 210001 |
| | | | 370 | 210002 |
| | | | 477-1T | 210004 |
| | | | DualPac® 2211 | 389794 |
| 3196 XLT | 2.500 x 3.375 x 0.4375 | 3 | 1400R | 210018 |
| | | | 1730 | 210015 |
| | | | 1760 | 210016 |
| | | | 370 | 210017 |
| | | | 477-1T | 210019 |
| | | | DualPac® 2211 | 389795 |

Goulds® is a registered trademark of ITT industries.

| SuperSet™ Product Item to fit Warman® | | | | |
|---------------------------------------|------------------------------|-----------------|---------------|-------------|
| Pump Model | ID x OD x Cross Section Inch | Number of Rings | Packing Type | Item Number |
| B Frame | 1.785 x 2.435 x 0.3125 | 3 | 1730 | 210738 |
| | | | 1830-SSP | 212036 |
| | | | 412-W | 212055 |
| | | | DualPac® 2211 | 389796 |
| | | | 1730 | 210739 |
| C Frame | 2.312 x 3.064 x 0.375 | 3 | 1830-SSP | 212040 |
| | | | 412-W | 212038 |
| | | | GraphMax™ | 212039 |
| | | | DualPac® 2211 | 389797 |
| | | | 1730 | 210741 |
| D Frame | 3.250 x 4.250 x 0.500 | 3 | 1830-SSP | 212044 |
| | | | 412-W | 212042 |
| | | | GraphMax™ | 212043 |
| | | | DualPac® 2211 | 389798 |
| | | | 1730 | 210742 |
| E Frame | 4.000 x 5.250 x 0.625 | 3 | 1830-SSP | 212048 |
| | | | 412-W | 212046 |
| | | | GraphMax™ | 212047 |
| | | | DualPac® 2211 | 389799 |
| | | | 1730 | 210744 |
| F Frame | 5.125 x 6.625 x 0.750 | 3 | 1830-SSP | 212052 |
| | | | 412-W | 212050 |
| | | | GraphMax™ | 212051 |
| | | | DualPac® 2211 | 389800 |
| | | | 1730 | 210744 |

Warman® is a registered trademark of Weir Minerals.

INDUSTRIAL LUBRICANTS AND MRO PRODUCTS ORDERING INFORMATION

| | | | |
|--|--------|---|--------|
| 274 Industrial Degreaser | | 630 SXCF Grease | |
| 20 l | 081006 | 400 g | 082713 |
| 208 l | 081013 | 18 kg..... | 082711 |
| Aerosol 350 g - ECSU..... | 081676 | 55 kg..... | 082714 |
| 276 Electronic Component Cleaner | | Aerosol 285 g - ECSU..... | 088687 |
| 20 l | 081623 | 630 SXCF 220 #1 Grease (Not available in EMEA) | |
| 208 l | 081624 | 400 g | 085768 |
| Aerosol 250 g - ECSU..... | 081622 | 18 kg..... | 085769 |
| 279 PCS: Precision Cleaning Solvent (Not available in EMEA) | | 55 kg..... | 085770 |
| Aerosol 250 g - ECSU | 083434 | 180 kg | 085771 |
| 292 Precision Degreasing Solvent (Not available in EMEA) | | 635 SXC Grease | |
| Aerosol 250 g - ECSU | 080529 | 400 g | 088556 |
| 294 Critical Surface Degreaser | | 18 kg..... | 088557 |
| Aerosol 379 g ECSU..... | 080783 | 55 kg..... | 088558 |
| 296 Electro Contact Cleaner (Not available in EMEA) | | 180 kg | 088559 |
| Aerosol 250 g - ECSU | 088650 | 650 Advanced Machinery Lubricant | |
| 390 Cutting Oil | | 475 ml | 085944 |
| Aerosol 370 g - ECSU..... | 080102 | 20 l | 085898 |
| 601 Chain Drive Pin and Bushing Lubricant | | 208 l | 085949 |
| 3.8 l (1 gal)..... | 081904 | 652 Pneumatic Lubricant and Conditioner | |
| 20 l | 081910 | 475 ml..... | 086888 |
| 208 l..... | 081907 | 20 l | 086000 |
| Aerosol 350 g - ECSU..... | 081902 | 208 l..... | 083018 |
| 610 Plus Synthetic Lubricating Fluid | | 690 FG (Food-Grade Lubricant) | |
| 475 ml..... | 086441 | 3.8 l (1 gal)..... | 082703 |
| 3.8 l (1 gal)..... | 084296 | 20 l | 082710 |
| 20 l | 084297 | 208 l..... | 082705 |
| 208 l..... | 084295 | Aerosol 350 g - ECSU..... | 082706 |
| 610 HT Synthetic Lubricating Fluid | | 715 Spraflex® | |
| 3.8 l (1 gal)..... | 083765 | 20 l | 081709 |
| 20 l | 080418 | 208 l..... | 081707 |
| 208 l..... | 080419 | Aerosol 350 g - ECSU..... | 081702 |
| 610 MT Plus Synthetic Lubricating Fluid | | 715 Spraflex® Gold | |
| 20 l | 082852 | 3.8 l (1 gal)..... | 081896 |
| 208 l..... | 082853 | 20 l | 081897 |
| 615 HTG #1 High-Temperature Grease | | 208 l..... | 081898 |
| 400 g | 086935 | Aerosol 300 g - ECSU..... | 082015 |
| 18 kg..... | 086936 | 720 CCG Lubricant with Diluent | |
| 55 kg..... | 086007 | Aerosol 285 g - ECSU..... | 086227 |
| 180 kg | 080725 | 20 l | 085995 |
| 615 HTG #2 High-Temperature Grease | | 208 l | 085996 |
| 400 g | 080042 | 475 ml | 085994 |
| 18 kg..... | 080043 | 720 CCG Lubricant | |
| 55 kg..... | 080045 | 20 l | 085993 |
| 180 kg | 080728 | 723 Sprasolvo™ | |
| 615 HTG #2 - 460 High-Temperature Grease | | Aerosol 350 g - ECSU | 081308 |
| 400 g | 084204 | 723 FG Sprasolvo™ | |
| 18 kg..... | 084205 | 475 ml..... | 086247 |
| 180 kg | 084190 | | |
| 625 CXF | | | |
| 400 g | 080707 | | |
| 18 kg..... | 080705 | | |
| 55 kg..... | 080706 | | |


Order numbers apply to US manufactured product.

INDUSTRIAL LUBRICANTS AND MRO PRODUCTS ORDERING INFORMATION

| | | | |
|---|--------|---|--------|
| 725 Nickel Anti-Seize Compound | | 803 Industrial and Marine Solvent II | |
| 250 g Brush Top | 081266 | 3.8 l (1 gal)..... | 086774 |
| 500 g Brush Top | 082359 | 20 l | 090379 |
| 20 l (24 kg) | 082349 | 208 l..... | 090388 |
| Aerosol 350 g - ECSU..... | 082351 | 1000 l | 086768 |
| 730 Spragrip® Belt Dressing | | KPC 820 | |
| Aerosol 320 g - ECSU..... | 080308 | 20 l | 082260 |
| 740 Heavy-Duty Rust Guard | | 208 l..... | 082264 |
| 3.8 l (1 gal)..... | 087705 | 1000 l | 083555 |
| 20 l | 087704 | KPC 820N | |
| 208 l..... | 087707 | 20 l (Not available in EMEA) | 088584 |
| Aerosol 300 g - ECSU..... | 087702 | 208 l (Not available in EMEA) | 088585 |
| 752 Cold Galvanizing Compound | | 860 Moldable Polymer Gasketing Kit | |
| 2.7 kg..... | 082603 | Kit: 2 Aerosol and 2 Cartridges..... | 086310 |
| Aerosol 350 g | 082601 | 900 GoldEnd® Paste | |
| 763 Rust Transformer™ | | 20 l | 000936 |
| 3.8 l (1 gal)..... | 089417 | 200 g | 000908 |
| 20 l | 089418 | 500 g Brush Top | 000909 |
| 208 l..... | 089419 | Lubri-Cup™ EM Series | |
| 772 Premium Nickel Anti-Seize Compound | | Lubri-Cup EM 250cc Main | 084307 |
| 500 g Brush Top | 082381 | Lubri-Cup EM 500cc Main (Not available in EMEA) | 084510 |
| 775 Moisture Shield | | Lubri-Cup XPL 250cc Main (Not available in EMEA)..... | 086412 |
| 457 ml | 086486 | Lubri-Cup EM-S 250cc Main (Not available in EMEA) | |
| 20 l | 082110 | (Relay Box Included Price)..... | 084309 |
| 208 l | 082107 | Lubri-Cup EM-SP 250cc for DC Power | |
| 783 ACR Corrosion-Resistant Anti-Seize | | (Power Supply Included Price)..... | 084311 |
| 250 g Brush Top | 082805 | Lubri-Cup EM-VS 120*/240cc..... | 085840 |
| 500 g Brush Top | 088653 | <i>*(Not available in EMEA)</i> | |
| 20 l (24 kg) | 088654 | Lubri-Cup™ OL 500 Oiler | |
| 785 Parting Lubricant | | Battery Operated..... | 084319 |
| 200 g | 086907 | with AC Power Supply | 084457 |
| 250 g Brush Top | 082016 | with DC Power Supply..... | 084464 |
| 500 g Brush Top | 080747 | Lubri-Cup™ VG | |
| 20 l (24 kg) | 080748 | 250cc with 615#1 HTG Grease (Not available in EMEA)..... | 084304 |
| Aerosol 350 g - ECSU..... | 081664 | 250cc with 615#2 HTG Grease (Not available in EMEA)..... | 084305 |
| 785 FG Parting Lubricant | | 250cc with 615#2-460 HTG Grease (Not available in EMEA).... | 085783 |
| 200 g Brush Top | 088506 | 250cc with 630 SXCF Grease (Not available in EMEA) | 084306 |
| 500 g Brush Top | 080788 | 250cc with 633 SXCM Grease (Not available in EMEA) | 084404 |
| 800 GoldEnd® Tape | | 250cc with 635 SXC Grease (Not available in EMEA) | 084383 |
| 6.4 mm x 13.72 m (1/4 x 540")..... | 000805 | Lubri-Cup™ VG Mini | |
| 12.7 mm x 4.57 m (1/2 x 180")..... | 000801 | 120cc with 630 SXCF Grease | 084473 |
| 12.7 mm x 13.72 m (1/2 x 540") | 000802 | 120cc with 615#2 HTG Grease | 084477 |
| 12.7 mm x 32.92 m (1/2 x 1 296")..... | 000803 | 120cc with 635 SXC Grease (Not available in EMEA) | 084492 |
| 19.1 mm x 13.72 m (3/4 x 540") | 000804 | | |
| 25.4 mm x 13.72 m (1 x 540") | 000806 | | |


Order numbers apply to US manufactured product.

POLYMER SEALS ORDERING INFORMATION

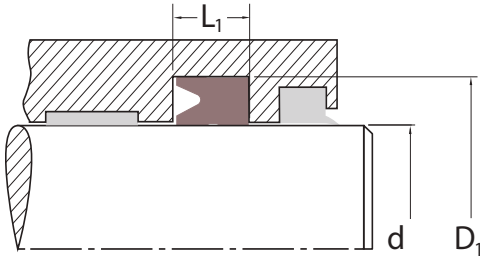

Example:

| | |
|---------------------------------|--------|
| Product Profile | R22K |
| Material (AWC designation) | AWC800 |
| Rod diameter (d) | 50 mm |
| Bore diameter (D ₁) | 70 mm |
| Groove height (L ₁) | 15 mm |

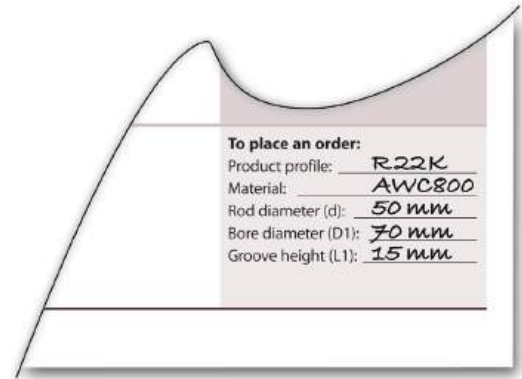

PRODUCT APPROVALS AND CERTIFICATIONS

Polymer Seals

| Application | Certifications/Approvals | Material |
|--------------|----------------------------|----------|
| Food Contact | EC1935 - 2004 - FDA 21 | AWC510 |
| Food Contact | FDA 21 CFR | AWC520 |
| Food Contact | EC1935 - 2004 - FDA 21 CFR | AWC615 |
| Food Contact | FDA 21 CFR | AWC650 |
| Food Contact | EC1935 - 2004 - FDA 21 CFR | AWC754 |
| Food Contact | FDA 21 CFR | AWC830 |

Mechanical Seals

| Application | Certifications/Approvals | Product |
|---------------------------|--------------------------|---|
| ATEX | ATEX Cat 1 (Group 2) | 442, 2810 |
| Drinking Water | ACS Approved | 442, 150 |
| Drinking Water | NSF-61 | 442C, 442, 1810, S10, 1510 |
| Drinking Water | WRAS Approved | 442C, 491, 1510 |
| Food Contact | FDA - 21 CFR | 442, 442C, S10, S20, 155, 255, 1810, 2810 |
| Fugitive Emission Control | TA Luft/VDI 2440 | 4400 |

Note: The above certifications and compliance are available on request.

PRODUCT APPROVALS AND CERTIFICATIONS

Compression Packing

| Application | Certifications/Approvals | Product |
|---------------------------|--|----------------|
| Fugitive Emission Control | API-589 (Fire Safe) - API-607 (Fire Safe) | 1600 |
| Fugitive Emission Control | API-622 - API-607 (Fire Safe) - TA Luft/ VDI 2440 -ISO 15848-1* | 1622 |
| Fugitive Emission Control | API-589 (Fire Safe) | 5800 |
| Fugitive Emission Control | TA Luft/VDI 2440 | 1600/477-1 LL |
| Fugitive Emission Control | TA Luft/VDI 2440 | 1724/477-1 LL |
| Fugitive Emission Control | TA Luft/VDI 2440 | 1724 Low E |
| Fugitive Emission Control | API-589 (Fire Safe) | 5300GTPG/ 1600 |
| Fugitive Emission Control | API-589 (Fire Safe) | 5800E |
| Fugitive Emission Control | API-589 (Fire Safe) | 5800T |
| Military | MIL P-24790(SH) | 1760 |
| Nuclear | Nuclear 10CFR pt21 | 1601 |
| Nuclear | Nuclear 10CFR pt21 | 5800 |
| Oxygen Compatible | BAM Oxygen | 1730 |
| Oxygen Compatible | BAM Oxygen | 1830 |
| Oxygen Compatible | BAM Oxygen | 1724-OX |

*Valve Test Standard

Flange Gaskets

| Application | Certifications/Approvals | Product |
|---------------------------|----------------------------|-------------|
| Food Contact | EC1935 - 2004 - FDA 21 CFR | ECS-T |
| Fugitive Emission Control | TA Luft/VDI 2440 | ECS-T |
| Fugitive Emission Control | TA Luft/VDI 2440 | Steel Trap™ |
| Marine | ABS Approval Shipping | ECS-T |

ARC

| Application Area | Approvals | Product |
|---|--|-------------------------|
| Drinking Water - Joining and Sealing Material | NSF Standard 61 - US Potable Water (Hot Water) | ARC 5ES |
| Drinking Water - Protective (Barrier) Materials | NSF Standard 61 - US Potable water (Tanks, Pipes, Valves, Pumps and Fittings) | ARC S1PW |
| Metal Repair and Hull Smoothing Types I and II | Mil Spec Approval - MIL-PRF-24176 (QPL-24176) | ARC 10 |
| Metal Repair and Hull Smoothing Types I and II | Mil Spec Approval - MIL-PRF-24176 (QPL-24176) | ARC 858 |
| Drinking Water | WRAS Approval Cold Water (UK Potable Water) | ARC S2(E) |
| Drinking Water | WRAS Approval Warm Water (UK Potable Water) | ARC SD4i(E), ARC 858(E) |
| Drinking Water | Global Migration Test for Water Approval (Iren Test Lab) | ARC S2 |
| Drinking Water | Global Migration Test for Water Approval (Iren Test Lab) | ARC CS2 |
| Food Contact | Tested to Regulation (EC) No. 1935/2004 | ARC 791 |
| Food Contact | Tested to Regulation (EC) No. 1935/2004 | ARC S1PW |
| Food Contact | Tested to 21 CFR 175.300 | MX FG |
| Food Contact | Tested to regulation (EC) No1935/2004 | ARC HT-S(E) |

chesterton.com/resources/compliance-approvals

Note: The above certifications and compliance are available on request.

PRODUCT APPROVALS AND CERTIFICATIONS

Industrial Lubricants and MRO Products

| Product | NSF | FDA | Military/Federal Specification | Other |
|---|--|--|---|---|
| 274 Industrial Degreaser | C1, K1, K2 133955 C1, K1, K2 133949 (aerosol) | 178.3530 | - | - |
| 276 Electronic Component Cleaner | K2 133974 (bulk) K2 133973 (aerosol) | 172.882 172.884 178.3530 178.3650 | | |
| 279 PCS | K2 134012 | - | - | |
| 294 CSD | C1, K1, K3 143867 | | | |
| 296 Electro Contact Cleaner | K2 134002 | - | - | - |
| 390 Cutting Oil | H2, U2 134014 H2, U2 134947 (aerosol) | - | - | - |
| 601 Chain Drive Pin and Bushing Lubricant | H2 133927 (aerosol) H2 133979 (bulk) | - | - | - CFIA |
| 610 Plus Synthetic Lubricating Fluid | H2 153827 (bulk) | - | - | - |
| 615 HTG #1 | H2 133941 | - | - | - |
| 615 HTG #2 | H2 133940 | - | - | - |
| 630 SXCF | H1 158844 (bulk) H1 142462 (aerosol) | 178.3570 | - | - |
| 630 SXCF 220 #1 | H1 157331 | 178.3570 | - | - |
| 650 AML | H1 162986 | 178.3570 | | |
| 652 Pneumatic Lubricant and Conditioner | H2 133944 | - | - | - |
| 690 FG Lubricant | H1 133933 (aerosol) H1 133969 (bulk) | 178.3620 | - | - CFIA |
| 715 Spraflex® Standard and Gold | H2 133938 H2 133934 (aerosol) H2 133930 (Gold) H2 133931 (Gold aerosol) | - | - | - |
| 720 CCG | H1 164375 (Bulk) H1 164376 (Bulk with Diluent) H1 170586 (Aerosol) | 178.3570 | | |
| 723 Sprasolvo™ | H2 133939 | - | - | - |
| 723 FG Sprasolvo™ | H1 132237 | 178.3570 | | |
| 725 Nickel Anti-Seize Compound | H2 133959 | - | MIL-A-907 | CFIA |
| 730 Spragrip® | P1 133947 | - | - | - |
| 740 Heavy-Duty Rust Guard | - | - | MIL-C-16173D Grade 1 & 4 | - |
| 752 Cold Galvanizing Compound | - | - | MIL-P-46105 MIL-P-26915 MIL-P-21035 | - |
| 772 Premium Nickel Anti-Seize Compound | - | - | MIL-A-907F | GE TIL 1117-3R1 GE D50YP12 GE NEDC-31735P |
| 785 Parting Lubricant (Bulk) | H2 133960 | - | | - |

For the most current listings and full descriptions of the category codes please visit [NSF.org/usda/psnclistings.asp](https://www.nsf.org/usda/psnclistings.asp)

PRODUCT APPROVALS AND CERTIFICATIONS

Industrial Lubricants and MRO Products

| Product | NSF | FDA | Military/Federal Specification | Other |
|--------------------------------------|---|----------------------|--------------------------------|---|
| 785 FG Parting Lubricant (Bulk) | H1 132237 | 178.3570 | | – |
| 800 GoldEnd® Tape | H1, S2 134016 | 177.1615 177.1550 | MIL-T-27730A | UL® Listed, UL Listed to Canadian safety standards Oxygen tested per ISO 10297 and ISO 11114-3, Oxygen certified BAM Ref. No. 11.1/46 513 Certified Food-Grade 1935-2004 |
| 803 Industrial and Marine Solvent II | A1 133966 | – | – | – |
| 860 Moldable Polymer Gasketing | S2 134017 (aerosol) P1 134018 (curing) | 175.300 177.2600 | – | – CFIA |
| 900 GoldEnd® Paste | H2, S2 133957 | – | – | UL® Listed, CFIA |
| Lubri-Cup™ VG Mini | | | | IP68, UL® Listed, ATEX |
| Lubri-Cup™ VG | | | | IP68, UL® Listed, ATEX |
| Lubri-Cup™ EM-XPL | | | | Intertek Listed, ATEX |

For the most current listings and full descriptions of the category codes please visit [NSF.org/usda/psncllistings.asp](https://www.nsf.org/usda/psncllistings.asp)



Global Solutions, Local Service

Since its founding in 1884, the A.W. Chesterton Company has successfully met the critical needs of its diverse customer base. Today, as always, customers count on Chesterton solutions to increase equipment reliability, optimize energy consumption, and provide local technical support and service wherever they are in the world.

Chesterton's global capabilities include:

- Servicing plants in over 113 countries
- Global manufacturing operations
- More than 500 Service Centers and Sales Offices worldwide
- Over 1200 trained local Service Specialists and Technicians

chesterton.com



Chesterton ISO certificates available on
chesterton.com/corporate/iso

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only. A.W. Chesterton Company disclaims all warranties express, or implied, including warranties of merchantability and fitness for a particular purpose. Liability, if any, is limited to product replacement only. Any images contained herein are for general illustrative or aesthetic purposes only and are not intended to convey any instructional, safety, handling or usage information or advice respecting any product or equipment. Please refer to relevant Safety Data Sheets, Product Data Sheets, and/or Product Labels for safe use, storage, handling, and disposal of products, or consult with your local Chesterton sales representative.

© 2026 A.W. Chesterton Company.

® Registered trademark owned by A.W. Chesterton Company
in USA and other countries, unless otherwise noted.

Distributed by:



A.W. Chesterton Company
860 Salem Street
Groveland, MA 01834 USA

Telephone: 781-438-7000
chesterton.com

Form No. EN24651
Core Products Catalog – English
4/26